


APEM IDEC – LIGHT CURTAINS – CORTINAS DE LUZ

Las cortinas de luz compactas y rentables garantizan la seguridad en el lugar de trabajo con diferentes tamaños y estilos disponibles para proteger los dedos, las manos y el cuerpo.



SE4D Light Curtains

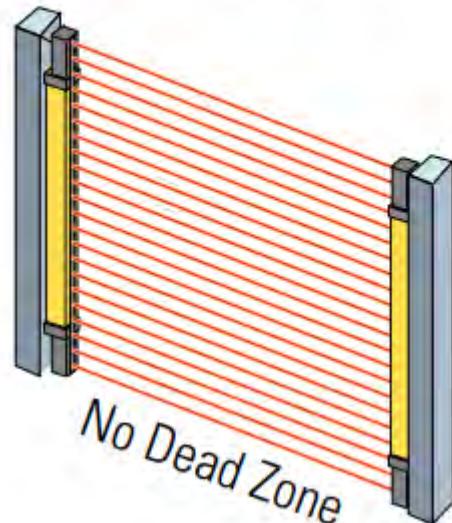

RESUMEN

Las cortinas de luz IDEC pueden mantener las áreas de producción funcionando de manera segura y eficiente mientras minimizan el tiempo de inactividad. Cada cortina de luz IDEC ofrece un amplio conjunto de características avanzadas para proteger a los operadores y la maquinaria, según su clasificación:

El tipo 4 proporciona **detección de dedos, manos y cuerpo** cuando existe un riesgo moderado o alto de lesiones para los operadores.

El tipo 2, disponible solo para **detección manual y corporal**, es apropiado para aplicaciones de menor riesgo en las que un accidente provocará lesiones leves al operador.

Las cortinas de luz APEM IDEC están disponibles en una variedad de estilos y cubren una amplia gama de alturas de control y distancias de operación. Las unidades compactas ofrecen tiempos de respuesta rápidos, protección de ingreso y funciones de monitoreo de dispositivos externos (EDM). Los modelos seleccionados vienen con EDM incorporado para ayudar a reducir el tamaño y el coste del panel de control. Los accesorios disponibles incluyen cables, controladores y soportes de montaje.



Automated Manufacturing



Packaging, Material Handling and Storage Machines



Automatic and Semi-automatic Assembling Line



Automatic Warehouse and Inventory Systems

Características

- Los tamaños van desde una altura de control de 230 mm con 12 rayos hasta 1,9 m con 96 rayos.
- Alcance de detección de 0,3 a 9m, varía según el modelo
- Diseño delgado y resistente.
- Sin zona muerta.
- Se pueden conectar en cascada hasta tres cortinas de luz (192 haces) sin zona muerta.
- La función de silenciamiento especial elimina la necesidad de cortinas ópticas independientes
- Las funciones de supresión fija y flotante evitan paradas falsas de la máquina
- La función de anulación permite reinicios suaves sin quitar el objeto
- La monitorización de dispositivos externos (EDM) incorporada ahorra espacio en el panel de control
- Tiempo de respuesta unificado de 14 ms
- Luz incidente visible para un fácil ajuste del haz
- Admite salidas PNP / NPN
- Grado de protección IP67
- PLe, Categoría 4, SIL 3
- MTTFd (año: 100)

APLICACIONES

Fabricación automatizada

Máquinas de embalaje, manipulación de materiales y almacenamiento


Líneas de ensamblaje automática y semiautomática

Sistemas Automáticos de Almacén e Inventario.





Think Automation and beyond...

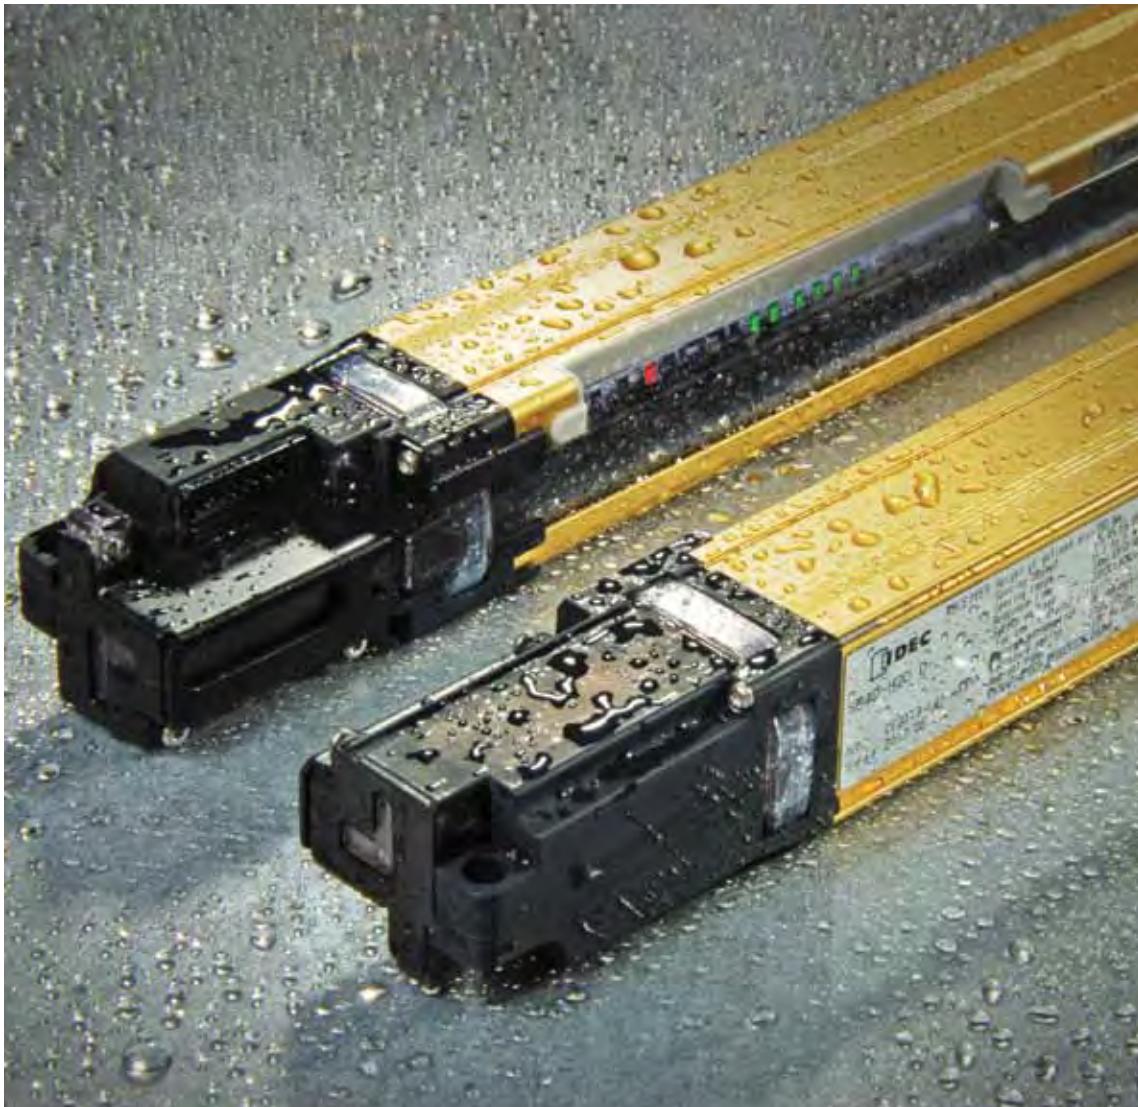

IDEc SE4D Safety Light Curtains

ERMEC,SL BARCELONA
Francesc Teixidó,22
08918 Badalona
España
bcn@ermec.com
Tel.: (+34)93.450.16.00

ERMEC MADRID
c/Puerto Rico, 4
28222 Majadahonda
España
madrid@ermec.com
Tel.: (+34)91.828.56.51

ERMEC PORTUGAL
Rua Brito Capelo, 807
4450-068 Matosinhos
Portugal
portugal@ermec.com
Tel.: (+351)707509539

ERMEC BILBAO
bilbao@ermec.com
Tel.: (+34)91.828.56.51
www.ermec.com



Safety - when & where you need it most

SE4D Safety Light Curtains

Light curtains are used to keep production environments safe for both operators and maintenance workers by stopping machines when unsafe or dangerous areas have been accessed.

The IDEC SE4D Light Curtains are easy to install and use specialized technology to ensure there are no dead zones around the units. Their features increase safety, reduce downtime and improve productivity by allowing operations to continue without unnecessary interruptions.



Type 4
Category 4
PLe
SIL3

Protection Degree
IP65
IP67
Muting Function
Blanking Function
EDM Function
ZERO Dead Zone


Typical Applications:

- Automated manufacturing
- Packaging, material handling & storage machines
- Textile, woodworking and ceramic
- Automatic and semi-automatic assembling lines
- Automatic warehouse & inventory systems


No Dead Zones for easy installation

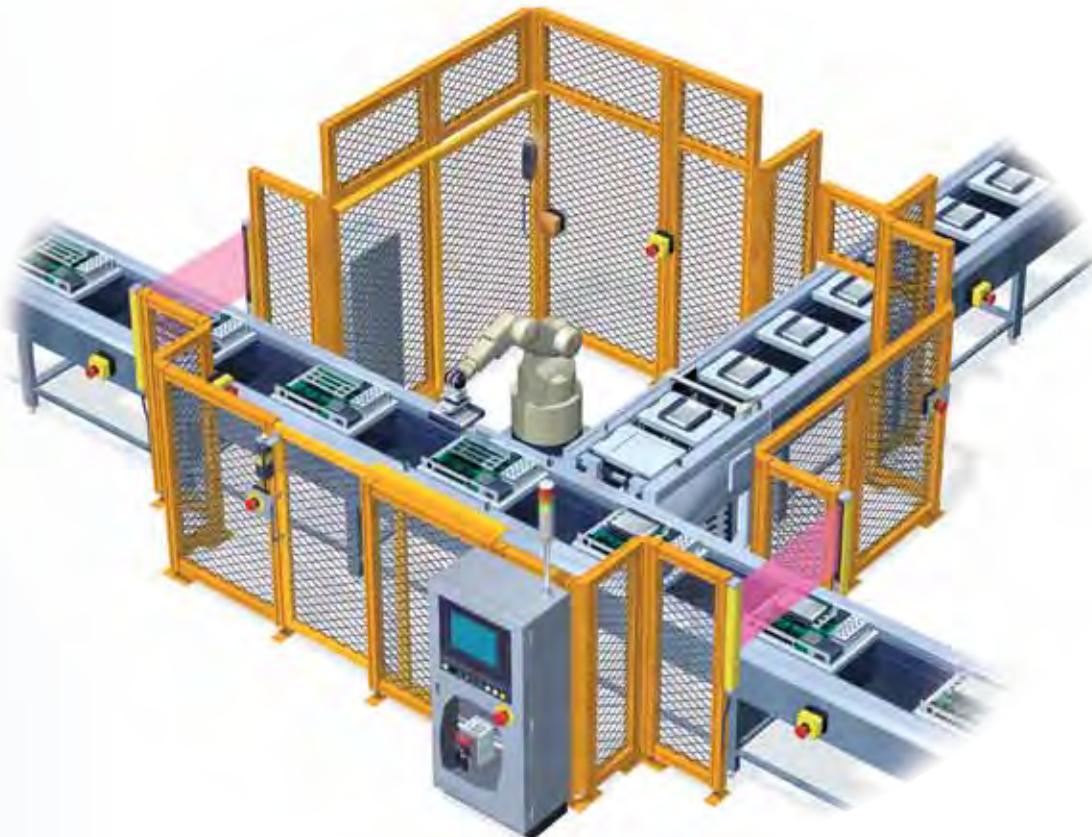


■ No Dead Zone

Conventional light curtains have a dead zone where there isn't any beam axis at the end of the units. With SE4D light curtains, the first beam axis is placed right along the edge, so detection can be performed along the entire length. Since it is not necessary to install it outside of the detection area in order to cover the dead zone, the SE4D light curtain can easily fit in any space.

SE4D Light Curtains




Conventional Light Curtains




Conventional Light Curtains

Outside Mounting

Externally mounted light curtains can restrict access to equipment and machinery.



SE4D Light Curtains



Inside Mounting

A customized barrier must be installed, at the bottom of the light curtain, to protect the dead zone.




Because there are no dead zones with the SE4D Light Curtains, they fit easily into any application making them a safe and more flexible solution.

Easy to cascade & mute

Cascading with No Dead Zone


Series Connection

Up to 3 units - 192 beams




To cover "L" or "U" shaped configurations or to guard both the front and back of a machine, up to 3 light curtain sets (emitter and receiver) can be connected together in a series without any dead zones.

Conventional Method



Units must overlap and can cause additional obstructions or unsafe areas.


SE4D Light Curtains



No dead zones!



Muting without Dedicated Controller

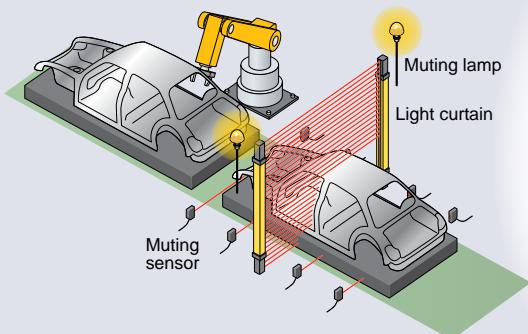


The SE4D light curtain is equipped with a muting function that causes production to stop when a person passes through the light curtain, but does not stop when an object passes through.

The advantage of the SE4D is that a muting sensor and muting lamp can be directly connected to the light curtain. A special controller for muting is not required.

Conventional Method



SE4D Light Curtains

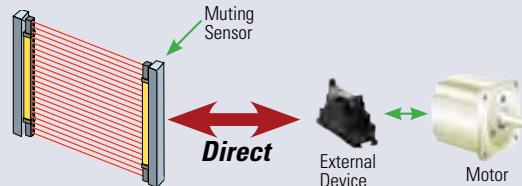


Because a special controller is not needed with the SE4D Light Curtains, a muting sensor and lamp can be directly connected reducing costs and saving installation time.

■ Override


When a light curtain is interrupted by an object or when operations stop before muting conditions are established (when only one muting sensor is interrupted), the object interrupting the light does not have to be removed. Therefore, operations can easily and safely resume.

Override Function




No need to remove object


No Override Function



Object must be removed
for restart.

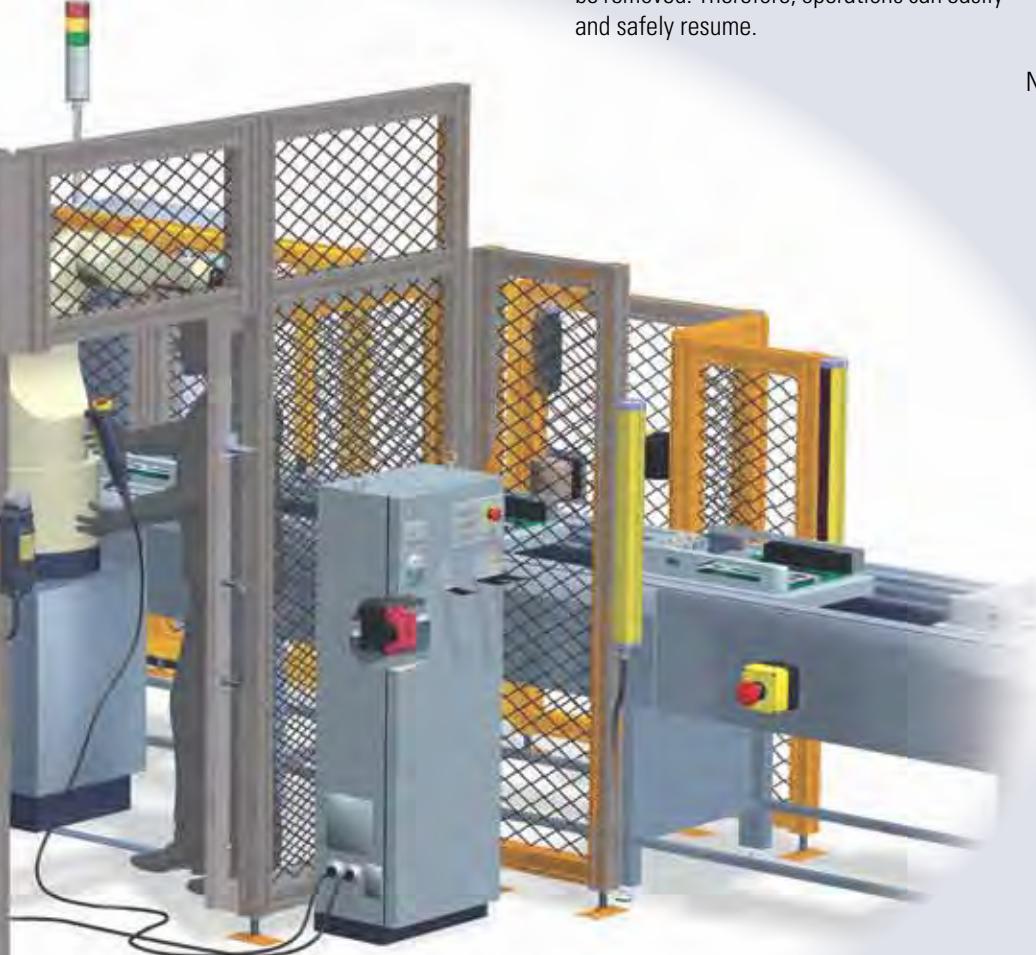


■ Fixed and Floating Blanking*



Fixed Blanking

Fixed blanking prevents the control output (OSSD1/2) from turning off when a specific beam is interrupted.

This is used in applications where a specific beam is always interrupted. When the object is moved outside of the sensing area, the control output (OSSD1/2) turns off.



Floating Blanking

Floating blanking function prevents the control output (OSSD1/2) from turning off when the number of beams interrupted is less than a preset number. The number that can be set is from 1 to 3 beams. This function enables sensing even when the position of the obstacles changes in the sensing area.

Note: The size of the minimum sensing object can change when the floating blanking function is used.


800.262.4332

www.IDEC.com/safety

*A controller (SE9Z-HC) is required for setting blanking functions.

Fast operation & simple setup


Built-in EDM (External Device Monitoring)

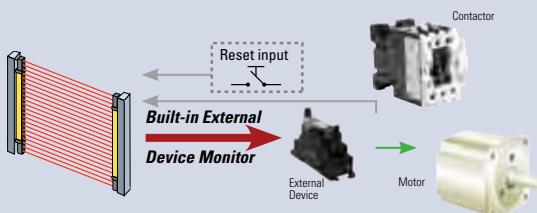

Since the SE4D light curtains have built-in EDM (external device monitoring), a safety circuit can easily be constructed without a safety relay module. As a result, the control panel can be downsized and costs reduced.

Fast Unified Response Time of 14ms


Series Connection - up to 3 units or 192 beams

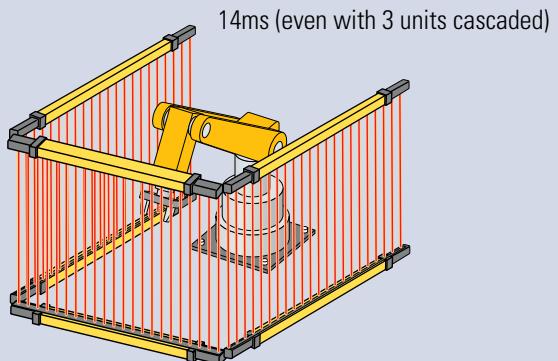

Regardless of the number of beams or the number of light curtains connected in a series, the maximum response time is 14ms! This reduces the time needed to calculate safety distances.

Beam Axis Adjustment

Light beams are divided into 4 blocks.



Step 1 LED "D" flashes red **Step 2** LEDs "C" and "D" are red **Step 3** All LEDs are green



Align the lowest beam axis.


Only the bottom two LEDs are on.

Beam axis is aligned.

Beam-axis alignment indicators display the light curtain's beam channels in four blocks. When the beam channel at the bottom channel (or top channel) is correctly aligned, the LED will blink red. Each block then lights red as the beam axes become aligned. When all channel beam axes are aligned, all LEDs will be green. The display also has a stability indicator (STB) to assist with setup.




■ Both PNP & NPN Supported in One Model

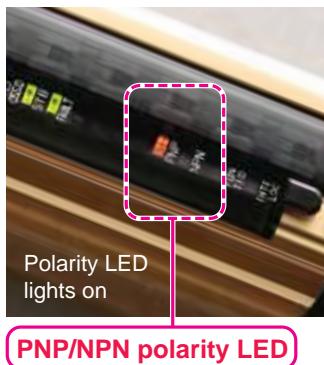

Both PNP and NPN transistor outputs are available in one light curtain.

Switch Between PNP/NPN by Changing Wiring

When the output polarity setting wire (shield) is connected to 0V the output is PNP. It becomes NPN when connected to 24V.

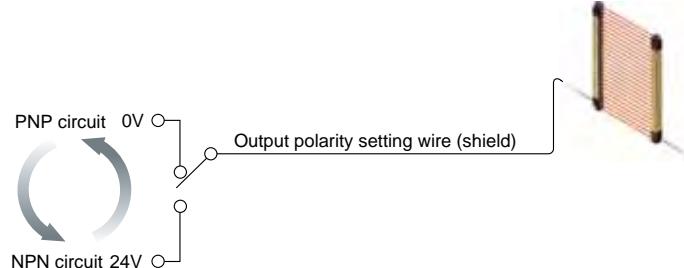

Output Polarity Setting Wire (shield)	Control Output (OSSD)
Connect to 0V	PNP output
Connect to 24V	NPN output
Not connected/open	Error


800.262.4332

www.IDEC.com/safety



Part Numbers

SE4D Light Curtains

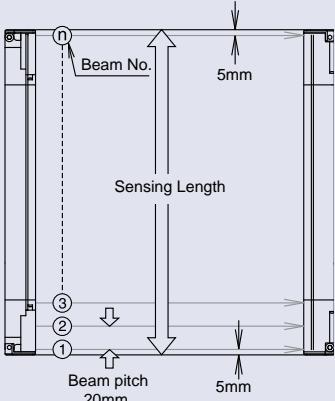Shape	Minimum Sensing Object	Sensing Distance (Note 2) (Effective Distance)	No. of Beams	Sensing Length (mm)	Part Number (Note 3)
	ø25mm	0.3 to 9m	12	230	SE4D-H12
			16	310	SE4D-H16
			20	390	SE4D-H20
			24	470	SE4D-H24
			28	550	SE4D-H28
			32	630	SE4D-H32
			36	710	SE4D-H36
			40	790	SE4D-H40
			48	950	SE4D-H48
			56	1,110	SE4D-H56
			64	1,270	SE4D-H64
			72	1,430	SE4D-H72
			80	1,590	SE4D-H80
			88	1,750	SE4D-H88
			96	1,910	SE4D-H96

1. Package quantity is 1 set (emitter/received). Mounting brackets and bottom cap cables are not included with the light curtain. Purchase a mounting bracket and bottom cap cable separately.

2. The sensing distance is the possible setting distance between the emitter and the receiver.

3. The light curtain with "E" in the part number (indicated on the nameplate) is the emitter. The light curtain with "D" in the part number (indicated on the nameplate) is the receiver.


Example for SE4D-H12: Emitter = SE4D-H12E, Receiver = SE4D-H12D

Accessories

Item	Description	Cable Length	Weight	Part Number	Remarks
	8-pin Bottom Cap Cable	3m	370g approx.	SE9Z-CCB3	
		7m	820g approx.	SE9Z-CCB7	Standard cable Cable diameter: ø6mm
		10m	1,160g approx.	SE9Z-CCB10	Cable color: Emitter - Gray, Receiver - Gray with black line Minimum bending diameter: R6 mm
		15m	1,710g approx.	SE9Z-CCB15	
	12-pin Bottom Cap Cable	3m	420g approx.	SE9Z-CCB3-MU	Used for muting function Cable diameter: ø6mm
		7m	930g approx.	SE9Z-CCB7-MU	Cable color: Emitter - Gray, Receiver - Gray with black line Minimum bending diameter: R6 mm
	Cable for Series Connection	0.5m	95g approx.	SE9Z-CSL05	Used for connecting the light curtains in series. Cable color: Gray (for emitter and receiver) Minimum bending diameter: R6 mm

Each pkg contains 2 cables.

Controller

Name and Shape	Part Number
	SE9Z-HC
	SE9Z-WNC1

The controller is used for setting optional functions.
The cable is used for connecting the controller and the light curtain. Order the cable when purchasing the controller.

Mounting Brackets

Item	Part Number	Remarks
Standard Mounting Bracket	SE9Z-SED-1	Mounting bracket for easy adjustment of the beam axis. Includes 2 hexagon socket head screws (M5) or 1 hexagon socket head screw (M8). The light curtain can be rotated 360 degrees. Material: Zinc diecast
M8 Mounting Bracket	SE9Z-SED-1-T	Mounting bracket for easy adjustment of the beam axis. The light curtain can be rotated 360 degrees. Material: Zinc diecast
Dead Space Mounting Bracket	SE9Z-SED-3	Mounting bracket that eliminates dead space. Material: Zinc diecast

Package Qty: 4

800.262.4332

www.IDEC.com/safety

 **ERMEC**
www.ermec.com

Specifications

General Specifications

Applicable standards	IEC/EN 61496-1 (TÜV), IEC 61496-2 (TÜV), IEC 61508-1 to 4 (TÜV), ISO 13849-1 (TÜV), EN ISO 13849-1 (TÜV), EN 50178 (TÜV), EN 55011 (TÜV), EN 61000-6-2 (TÜV), UL 508 (UL), UL 61496-1/2 (UL), UL 1998 (UL), CSA C22.2 No.14 (c-UL), CSA C22.2 No.8 (c-UL)				
Minimum Sensing Object	ø25mm (opaque)				
Effective Aperture Angle	When detection distance is more than 3m: within ±2.5° maximum (IEC 61496-2, UL 61496-2)				
Rated Voltage	24V DC ±20% Ripple P-P10% maximum PNP open-collector transistor / NPN open-collector transistor (switching type)				
Control output (OSSD1/2)	PNP Output Maximum source current: 200mA Applied voltage: Same as supply voltage (between control output and +V) Residual voltage: 2.5V max. (source current 200mA, using 15m length cable) Leakage current: 0.1mA max. (includes power off state) Maximum load capacity: 0.22μF (no load to max. output current) Load wiring resistance: 3W max.	NPN Output Maximum sink current: 200mA Applied voltage: Same as supply voltage (between control output and 0V) Residual voltage: 2.5V max. (sink current 200 mA, using 15m length cable) Leakage current: 0.1mA max. (includes power off state) Maximum load capacity: 0.22μF (no load to max. output current) Load wiring resistance: 3W max.			
Operation mode (Output operation)	ON when all beams are received, OFF when one or more beams are interrupted (Note 1, 2) (Also turns OFF at sensor or synchronization error)				
Protection circuit (Short-circuit)	Built-in				
Response Time	OFF response: 14ms max., ON response: 80 to 90ms PNP open-collector transistor / NPN open-collector transistor (switching type)				
Auxiliary output (Non-safety output)	PNP Output Maximum source current: 60mA Applied voltage: Same as supply voltage (between auxiliary output and +V) Residual voltage: 2.5V min. (source current 60mA, using 15m length cable)	NPN Output Maximum sink current: 60mA Applied voltage: Same as supply voltage (between auxiliary output and 0V) Residual voltage: 2.5V min. (sink current 60mA, using 15m length cable)			
Operation mode (Output operation)	When OSSDs are ON: OFF, when OSSDs are OFF: ON (factory set) [Operation modes can be changed by using the SE9Z-HC controller (optional).]				
Protection circuit (Short-circuit)	Built-in				
Response Time	OFF response: 34ms max., ON response: 110ms max.				
Interference Prevention Function	Built-in				
Emission Halt Function					
Interlock Function					
External Device Monitoring Function					
Override Function					
Muting Function					
Optional Functions (Note 4)	Fixed blanking function, Floating blanking function, Auxiliary output switching function, Interlock setting adjust function, External relay monitoring setting adjust function, Muting setting adjust function, Protect function, Emitted light intensity control function				
Degree of Protection	IP65, IP67 (IEC 60529)				
Operating Conditions	Operating temperature: -10 to +55°C (no freezing) Relative humidity: 30 to 85%RH (no condensation) Storage temperature: -25 to +70°C (no freezing) Storage humidity: 30 to 95%RH (no condensation) Pollution Degree: 3				
Operating Illuminance	Incandescent lamp: 3,500 lux max. at light-receiving surface				
Dielectric Strength	1,000V AC, 1 minute between power terminals connected together and enclosure				
Insulation Resistance	20MW minimum (500V DC megger) between power terminals connected together and enclosure				
Vibration Resistance	Damage limits: 10 to 55Hz, amplitude: 0.75mm 2 hours each in 3 axes				
Shock Resistance	Damage limits: 300m/s² (30G approx.) 3 times each in 3 axes				
Light Source	Infrared LED (emission wavelength = 870nm)				
Connection	Connector				
Material	Enclosure: Aluminum Upper / lower case: Aluminum Sensing surface: PC / Polyester resin Cap: PBT				
Accessories	SE9Z-SED-2 (intermediate supporting bracket) (Note 3), SE9Z-TR25 (test rod): 1				

1. Does not turn OFF during muting even when the light beam is interrupted.

2. When the blanking function is enabled, the operation mode changes:

Floating Blanking Function (Min. Sensing Object)			
No setting	Setting		
	1 beam	2 beam	3 beam
ø25mm	ø45mm	ø65mm	ø85mm

3. The number of intermediate supporting brackets that is included differs with each model.

SE4D-H40/H48/H56 = 1 set, SE4D-H64/H72/H80 = 2 sets, SE4D-H88/H96 = 3 sets

4. When using the optional functions, the controller is required.



www.ermec.com

Individual Specifications

Part Number	SE4D-H12	SE4D-H16	SE4D-H20	SE4D-H24	SE4D-H28	SE4D-H32
No. of Beams	12	16	20	24	28	32
Sensing Range			0.3 to 9m			
Beam Width			20mm			
Protective Height	230mm	310mm	390mm	470mm	550mm	630mm
Current Consumption	Emitter: 70mA max., Receiver: 95mA max.			Emitter: 80mA max., Receiver: 115mA max.		
PFHd	2.01×10^{-9}	2.21×10^{-9}	2.41×10^{-9}	2.61×10^{-9}	2.81×10^{-9}	3.01×10^{-9}
MTTFd	100 years minimum					
Weight (approx.)	510g	660g	810g	960g	1,110g	1,260g
Part Number	SE4D-H36	SE4D-H40	SE4D-H48	SE4D-H56	SE4D-H64	SE4D-H72
No. of Beams	36	40	48	56	64	72
Sensing Range			0.3 to 9m			0.3 to 7m
Beam Width			20mm			
Protective Height	710mm	790mm	950mm	1,110mm	1,270mm	1,430mm
Current Consumption	Emitter: 80mA max. Receiver: 115mA max.	Emitter: 90mA max. Receiver: 140mA max.		Emitter: 100mA max. Receiver: 160mA max.		Emitter: 110mA max. Receiver: 180mA max.
PFHd	3.21×10^{-9}	3.41×10^{-9}	3.80×10^{-9}	4.20×10^{-9}	4.60×10^{-9}	5.00×10^{-9}
MTTFd	100 years minimum					
Weight (approx.)	1,420g	1,570g	1,870g	2,170g	2,470g	2,770g
Part Number	SE4D-H80	SE4D-H88	SE4D-H96			
No. of Beams	80	88	96			
Sensing Range		0.3 to 7m				
Beam Width		20mm				
Protective Height	1,590mm	1,750mm	1,910mm			
Current Consumption	Emitter: 110mA max. Receiver: 180mA max.	Emitter: 120mA max. Receiver: 200mA max.				
PFHd	5.40×10^{-9}	5.80×10^{-9}	6.20×10^{-9}			
MTTFd	100 years minimum					
Weight (approx.)	3,070g	3,370g	3,670g			

Note: PFHd (Probability of dangerous failure per hour), MTTFd (Mean time to dangerous failure)

Weight is the (total of emitter and receiver).

Controller

Part Number	SE9Z-HC	
Supply Voltage	24V DC $\pm 10\%$ Ripple P-P10 % or less (common to light curtain power supply)	
Current Consumption	65mA max.	
Communication Method	RS-485 two-way communications (exclusive procedure)	
Digital LED	4-digit red LED display x 2 (selected beams and settings are displayed)	
Functional LED	Green LED x 9 (lights on when set)	
Functions	<ul style="list-style-type: none"> • Fixed blanking function (factory setting: disabled) • Floating blanking function (factory setting: disabled) • Auxiliary output switching function (factory setting: negative logic of OSSD) • Emitted light intensity control function (factory setting: disabled) • Muting setting adjust function (factory setting: all beam channels enabled, A = B (Note 2), Muting lamp diagnosis function enabled, Muting sensor output operation N.O/N.O) 	
Operating Conditions	Operating Temperature: -10 to +55°C (no freezing) Operating Humidity: 30 to 85% RH (no condensation) Storage Temperature: -25 to +70°C (no freezing) Storage Humidity: 30 to 85% RH (no condensation)	
Dielectric Strength	1,000V AC, 1 minute between power terminals connected together and enclosure	
Insulation Resistance	20MΩ min. (500V DC megger) between power terminals connected together and enclosure	
Cable	8-core shielded cable, 0.5m 1.640 ft long, with a connector at the end (2 cables)	
Weight (approx.)	200g	
Accessories	Adapter cable: 2	


1. The operating humidity is +20° for conditions that are not specified.

2. To enable the muting function, A or B input order can be specified. The muting function is enabled, at the factory, whether muting A or B is input first.


Light Curtains with Standard Mounting Bracket (SE9Z-SED-1) & Intermediate Supporting Bracket (Note 1)

Side Mounting


Emitter

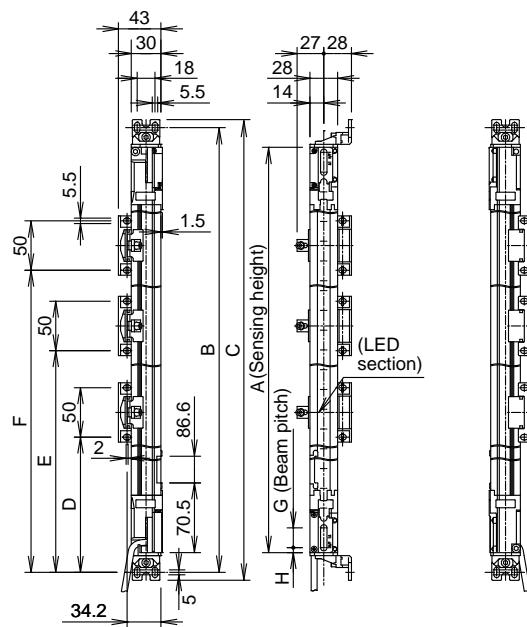


Receiver

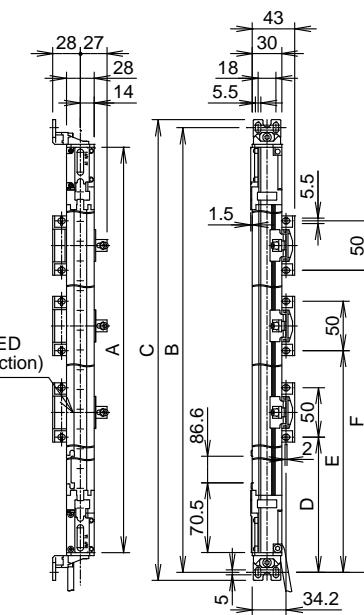

Emitter

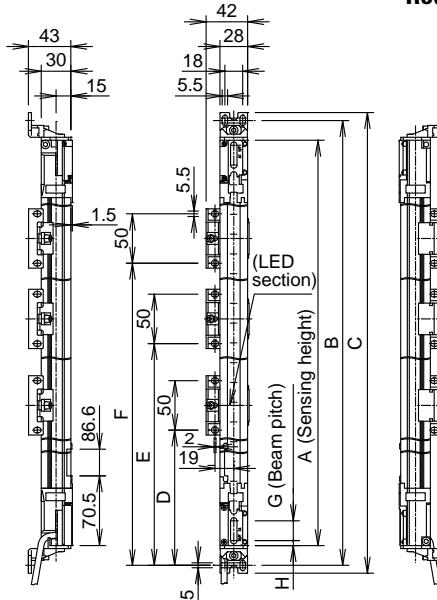

Receiver

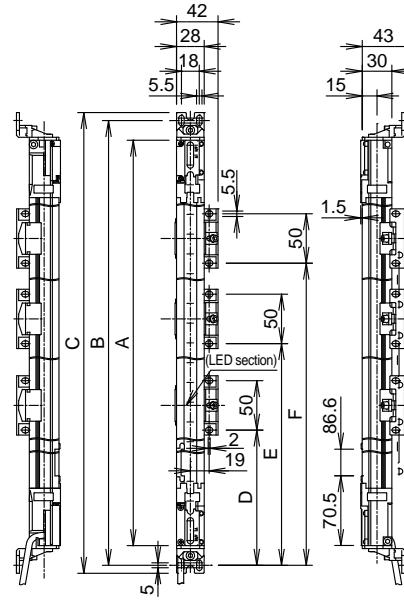

Part Number	A	B	C	D	E	F	G	H
SE4D-H12	230	270	286	-	-	-	20	5
SE4D-H16	310	350	366	-	-	-	20	5
SE4D-H20	390	430	446	-	-	-	20	5
SE4D-H24	470	510	526	-	-	-	20	5
SE4D-H28	550	590	606	-	-	-	20	5
SE4D-H32	630	670	686	-	-	-	20	5
SE4D-H36	710	750	766	-	-	-	20	5
SE4D-H40	790	830	846	390	-	-	20	5
SE4D-H48	950	990	1,006	470	-	-	20	5
SE4D-H56	1,110	1,150	1,166	550	-	-	20	5
SE4D-H64	1,270	1,310	1,326	418	842	-	20	5
SE4D-H72	1,430	1,470	1,486	472	948	-	20	5
SE4D-H80	1,590	1,630	1,646	525	1,055	-	20	5
SE4D-H88	1,750	1,790	1,806	433	870	1,308	20	5
SE4D-H96	1,910	1,950	1,966	473	950	1,428	20	5

- The intermediate supporting bracket (SE9Z-SED-2) is supplied (for SE4D-H40 to H96). The number of brackets supplied varies according to the model:
SE4D-H40/H48/H56 = 1 set, SE4D-H64/H72/H80 = 2 sets, SE4D-H88/H96 = 3 sets


800.262.4332
www.IDEC.com/safety

IDEC Safety Interlock Switches



Available in a variety of sizes, contact arrangements and functions, IDEC safety interlock switches can be used in many different safety system applications from machine tools and semiconductor equipment to material handling and packaging equipment.

Safety Product Information:

www.IDEC.com/safety

Product & Technical Support:

support@IDEC.com

Find your local IDEC Representative or Distributor:

www.IDEC.com/usa/locator

Phone:

800-262-IDEC (4332)

ERMEC,SL BARCELONA
 Francesc Teixidó,22
 08918 Badalona
 España
bcn@ermec.com
 Tel.: (+34)93.450.16.00

ERMEC MADRID
 c/Puerto Rico, 4
 28222 Majadahonda
 España
madrid@ermec.com
 Tel.: (+34)91.828.56.51

ERMEC PORTUGAL
 Rua Brito Capelo, 807
 4450-068 Matosinhos
 Portugal
portugal@ermec.com
 Tel.: (+35)1707509539

ERMEC BILBAO
bilbao@ermec.com
 Tel.: (+34)91.828.56.51

www.ermec.com



Think Automation and beyond...

800.262.4332

www.IDEC.com/safety

www.IDEC.com

USA
IDECA Corporation
 Tel: (408) 747-0550
opencontact@IDEC.com

Canada
IDECA Canada Ltd.
 Tel: (905) 890-8561
sales@ca.IDEC.com

Australia
IDECA Australia Pty. Ltd.
 Tel: +61-3-8523-5900
sales@au.IDEC.com

Japan
IDECA Corporation
 Tel: +81-6-6398-2571
marketing@IDEC.co.jp

United Kingdom
IDECA Electronics Ltd.
 Tel: +44-1256-321000
sales@uk.IDEC.com

Germany
IDECA Elektrotechnik GmbH
 Tel: +49-40-253054-0
service@IDEC.de

Hong Kong
IDECA (H.K.) Co., Ltd.
 Tel: +852-2803-8989
info@hk.IDEC.com

China/Beijing
IDECA (Beijing) Corporation
 Tel: +86-10-6581-6131

China/Shanghai
IDECA (Shanghai) Corporation
 Tel: +86-21-6135-1515
idec@cn.IDEC.com

China/Shenzhen
IDECA (Shenzhen) Corporation
 Tel: +86-755-8356-2977

Singapore
IDECA Asia Pte. Ltd.
 Tel: +65-6746-1155
info@sg.IDEC.com

Taiwan
IDECA Taiwan Corporation
 Tel: +886-2-2698-3929
service@tw.IDEC.com

©2012 IDECA Corporation. All Rights Reserved.
 Catalog No. SE9Y-B100-0 12/12 10K

Specifications and other descriptions in this catalog are subject to change without notice.