

CONECTORES RECTANGULARES DE POTENCIA

una gama de producto de Bulgin.

Soluciones fiables y resistentes para aplicaciones cable a cable en entornos hostiles.

RECTANGULAR CONNECTORS



La serie tiene opción macho y hembra, así como modificaciones que incluyen sellado mejorado, tapas protectoras, adaptadores de funda retráctil, bridas soldadas, resistencias terminales y un conector tipo Y para uso industrial e industria del automóvil.



Robustez

Resistente al agua y al polvo hasta IP68. Sin caída mecánica o eléctrica en el rendimiento después de 100 ciclos



Temperatura

Puede funcionar dentro de un rango de temperatura de -40°C a 120°C



Versatilidad

Destaca en una amplia gama de industrias, incluidas automoción, la construcción, la agrícola y la marina.

Pines: De 2 a 12	AWG: De 14 a 20	Ratio: 13A	Ratio de Protección: Hasta IP68
----------------------------	---------------------------	----------------------	---

Una solución para entornos hostiles.


Bulgin, representada por ERMEC, ofrece una solución fiable y resistente para aplicaciones cable a cable en entornos hostiles con su gama de productos sellados para el medio ambiente. Disponibles en negro y gris y con modificaciones disponibles como montaje de brida, los conectores rectangulares están diseñados para tener una alineación de contacto consistente con el uso de cierres de cuña..

The Bulgin Rectangular Power Connector range offers a reliable, rugged solution for cable to cable applications in harsh environments with its environmentally sealed range of products.

The series has a male and female option, as well as modifications such as enhanced seal retention, protective end caps, shrink boot adapters, welded flange, terminating resistors and a Y-Type connector for the automotive industry.

Key Features:

- ⬢ 2, 3, 4, 6, 8 & 12 Pole Count
- ⬢ Accepts size 16 Contacts
- ⬢ IP68 & IP69K
- ⬢ Choice of Enhanced Seal Retention (ESR), Protective End Caps (PEC), Shrink Boot Adapters (SBA), Welded Flange (WFL), Terminating Resistors (TER) and a Y-Type Connector (YTY)
- ⬢ Rated to 13A
- ⬢ Wedge-locks supplied for contact retention and alignment
- ⬢ Accepts 14 - 20 AWG

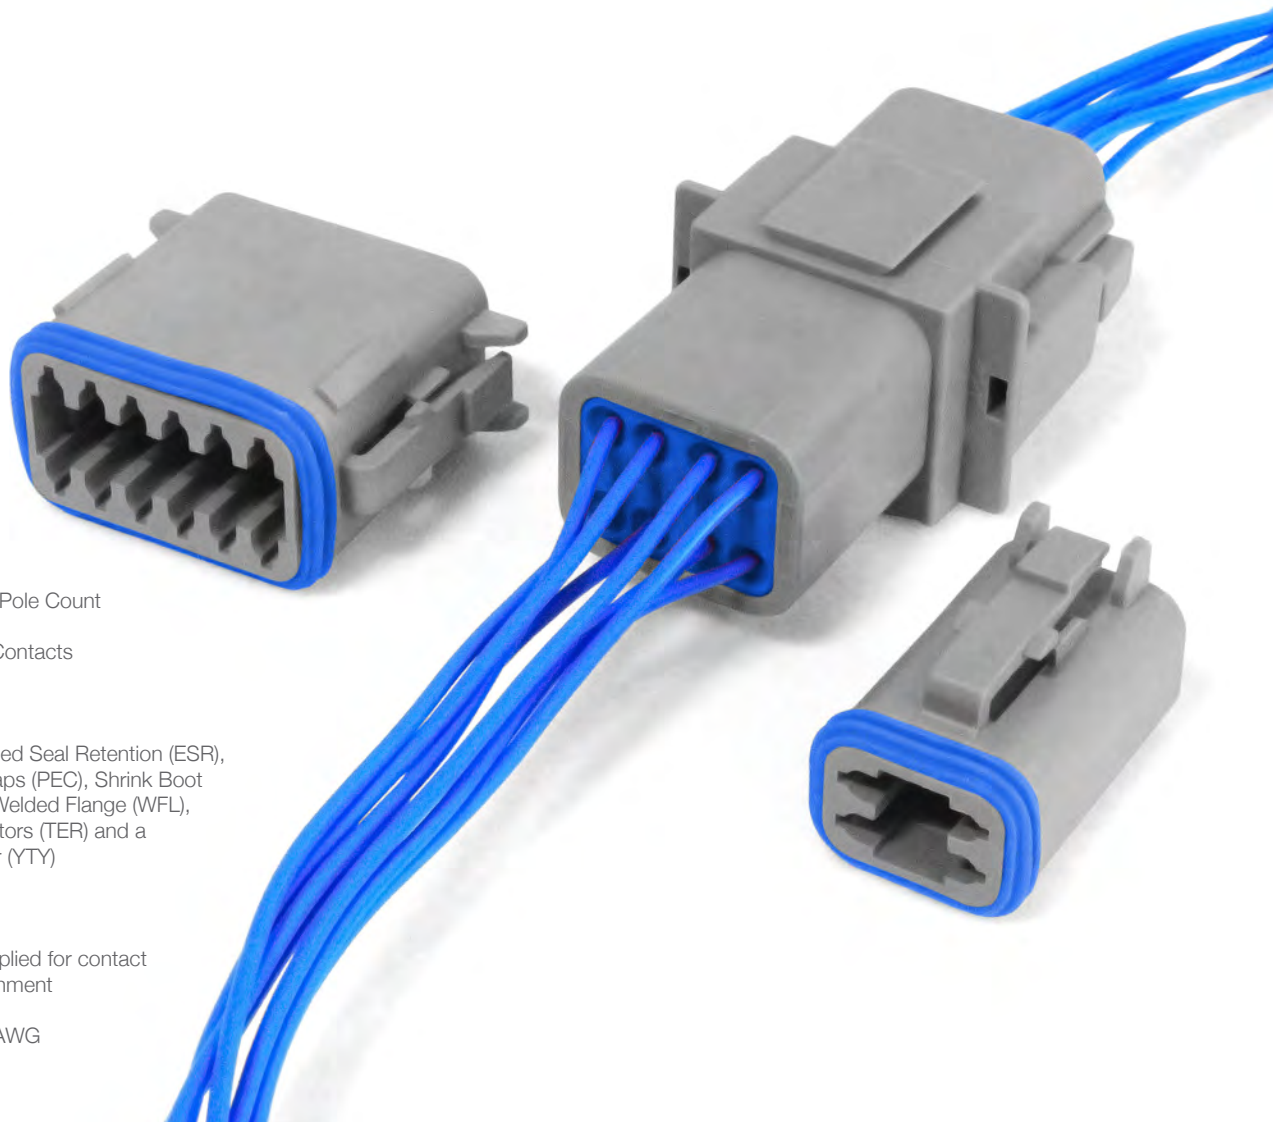

RECTANGULAR Standard Rectangular Power Connectors




Rectangular Power Connector Male



PX0100

- 2, 3, 4, 6, 8 & 12 poles
- Male housing
- Wedge-locks included
- Socket contacts
- Available in Grey and Black
- Additional options available




Part Number	Poles	Key	Termination	Colour	Additional
PX0100S02BK	2	-	Crimp	Black	-
PX0100S02GY	2	-	Crimp	Grey	-
PX0100S03BK	3	-	Crimp	Black	-
PX0100S03GY	3	-	Crimp	Grey	-
PX0100S04BK	4	-	Crimp	Black	-
PX0100S04GY	4	-	Crimp	Grey	-
PX0100S06BK	6	-	Crimp	Black	-
PX0100S06GY	6	-	Crimp	Grey	-
PX0100S08AGY	8	A	Crimp	Grey	-
PX0100S12AGY	12	A	Crimp	Grey	-
PX0102S02BK	2	-	Crimp	Black	ESR
PX0103S02GY	2	-	Crimp	Grey	ESR & PEC
PX0104S02BK	2	-	Crimp	Black	ESR & SBA
PX0105S02BK	2	-	Crimp	Black	PEC
PX0105S02GY	2	-	Crimp	Grey	PEC
PX0105S03BK	3	-	Crimp	Black	PEC
PX0105S03GY	3	-	Crimp	Grey	PEC
PX0105S04BK	4	-	Crimp	Black	PEC
PX0105S04GY	4	-	Crimp	Grey	PEC
PX0105S06BK	6	-	Crimp	Black	PEC
PX0105S06GY	6	-	Crimp	Grey	PEC
PX0105S08ABK	8	A	Crimp	Black	PEC
PX0105S08AGY	8	A	Crimp	Grey	PEC
PX0105S12AGY	12	A	Crimp	Grey	PEC
PX0108S02GY	2	-	Crimp	Grey	SBA
PX0108S03GY	3	-	Crimp	Grey	SBA
PX0108S04GY	4	-	Crimp	Grey	SBA
PX0110S03GY	3	-	Crimp	Grey	TER

Rectangular Power Connectors Female



PX0101

- 2, 3, 4, 6, 8 & 12 poles
- Female Housing
- Wedge-locks included
- Pin contacts
- Available in Grey and Black
- Additional options available



Part Number	Poles	Key	Termination	Colour	Additional
PX0101P02BK	2	-	Crimp	Black	-
PX0101P02GY	2	-	Crimp	Grey	-
PX0101P03BK	3	-	Crimp	Black	-
PX0101P03GY	3	-	Crimp	Grey	-
PX0101P04BK	4	-	Crimp	Black	-
PX0101P04GY	4	-	Crimp	Grey	-
PX0101P06BK	6	-	Crimp	Black	-
PX0101P06GY	6	-	Crimp	Grey	-
PX0101P08ABK	8	A	Crimp	Black	-
PX0101P08AGY	8	A	Crimp	Grey	-
PX0101P12ABK	12	A	Crimp	Black	-
PX0101P12AGY	12	A	Crimp	Grey	-
PX0106P02BK	2	-	Crimp	Black	PEC
PX0106P02GY	2	-	Crimp	Grey	PEC
PX0106P03BK	3	-	Crimp	Black	PEC
PX0106P03GY	3	-	Crimp	Grey	PEC
PX0106P04BK	4	-	Crimp	Black	PEC
PX0106P04GY	4	-	Crimp	Grey	PEC
PX0106P06BK	6	-	Crimp	Black	PEC
PX0106P06GY	6	-	Crimp	Grey	PEC
PX0106P08ABK	8	A	Crimp	Black	PEC
PX0106P08AGY	8	A	Crimp	Grey	PEC
PX0106P12ABK	12	A	Crimp	Black	PEC
PX0106P12AGY	12	A	Crimp	Grey	PEC
PX0107P03GY	3	-	Crimp	Grey	PEC & SBA
PX0109P02BK	2	-	Crimp	Black	SBA
PX0109P02GY	2	-	Crimp	Grey	SBA
PX0109P03BK	3	-	Crimp	Black	SBA
PX0109P04GY	4	-	Crimp	Grey	SBA
PX0111P03GY	3	-	Crimp	Grey	TER
PX0112P02GY	2	-	Crimp	Grey	WFL
PX0112P03GY	3	-	Crimp	Grey	WFL
PX0112P04GY	4	-	Crimp	Grey	WFL
PX0112P08AGY	8	A	Crimp	Grey	WFL
PX0112P12AGY	12	A	Crimp	Grey	WFL
PX0113P03GY	3	-	Crimp	Grey	YTY

Accessories



SA100

- Crimp Pin & Sockets
- Choice of Gold and Nickel Plated
- Green Stripe available

Part Number	Plating	AWG	Type	Pin / Socket	Additional
SA1000/G	Nickel Plating	14	Solid	Pin	Green Stripe
SA1001/G	Nickel Plating	14	Solid	Socket	Green Stripe
SA1000	Nickel Plating	14	Solid	Pin	-
SA1001	Nickel Plating	14	Solid	Socket	-
SA1002	Nickel Plating	16 - 20	Solid	Pin	-
SA1003	Nickel Plating	16 - 20	Solid	Socket	-
SA1004	Nickel Plating	16 - 20	Stamped	Pin	Bandolier
SA1005	Nickel Plating	16 - 20	Stamped	Socket	Bandolier
SA1006	Nickel Plating	14, 16, 18	Stamped	Pin	Bandolier
SA1007	Nickel Plating	14, 16, 18	Stamped	Socket	Bandolier
SA1008	Gold Plating	14, 16, 18	Stamped	Pin	Bandolier
SA1009	Gold Plating	14, 16, 18	Stamped	Socket	Bandolier

Wedgelocks



WLP12

- Pin & Sockets available
- 2, 3, 4, 6, 8 & 12 Pole

Part Number	Contacts	Pin / Socket	Additional
WLP02	02	Pin	-
WLS02	02	Socket	-
WLS02ENS	02	Socket	Enhanced Seal
WLP03	03	Pin	-
WLS03	03	Socket	-
WLP04	04	Pin	-
WLS04	04	Socket	-
WLP06	06	Pin	-
WLS06	06	Socket	-
WLP08	08	Pin	-
WLS08	08	Socket	-
WLP12	12	Pin	-
WLS12	12	Socket	-



Electrical:

No Poles:	2, 3, 4, 6, 8 & 12
Current Rating:	13A
Voltage Rating:	250V DC
Insulation Resistance:	>1000MΩ (@ 500V DC)
Dielectric Strength:	<2mA @ 15V AC
Operating Temperature Range:	-40°C to +120°C


Mechanical:

Sealing:	IP68, EN60529:1992+A2:2013 tested @ 1.054kg/sq.cm. (15lb/sq.in.) 10m depth for 2 weeks
Salt Mist:	EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1
Contact Accommodation:	14 - 20 AWG 2.5-0.35 mm²
Termination:	Crimp terminals
Contact Retention:	Size 16: 111N (25 lbs)
Cycles:	100

Material

Body Mouldings:	Polybutylene Terephthalate, Polyamide Glass Fiber
Contacts:	Copper Alloy Nickel Plated, Copper Alloy Gold Plated
Rubber Seal:	Silicone Rubber
RoHS	Compliant


Contact Layout

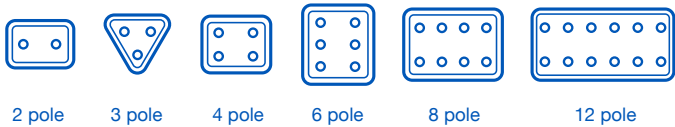

PX0	XXX	X	XX	X	XX
Range	Body Type	Contact Type	Contacts	Key	Colour
PX0	100 = Male 101 = Female 102 = Male Enhanced Seal Retention 103 = Male Enhanced Seal Retention & Protective End Cap 104 = Male Enhanced Seal Retention & Shrink Boot Adapter 105 = Male Protective End Cap 106 = Female Protective End Cap 107 = Female Protective End Cap & Shrink Boot Adapter 108 = Male Shrink Boot Adapter 109 = Female Shrink Boot Adapter 110 = Male Terminating Resistor 111 = Terminating Resistor 112 = Female Welded Flange 113 = Female Y Type	S = Socket P = Pin	02 = 2 Contacts 03 = 3 Contacts 04 = 4 Contacts 06 = 6 Contacts 08 = 8 Contacts 12 = 12 Contacts	A = A Key	GY = Grey BK = Black



+Información del producto

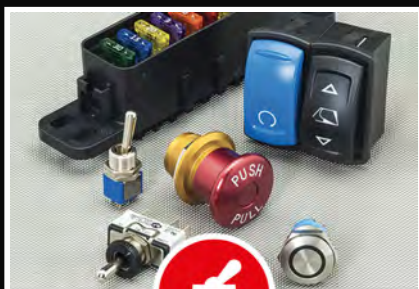


INTERRUPTORES

Pulsadores, Interruptores, para PCB, de Palanca, E-Stops, Piezoeléctricos, Antivandálicos, Microswitches




CONEXIÓN

Conectores circulares, Bases y conectores IEC, Cables flexibles

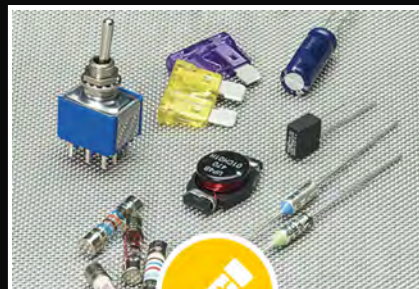

ELECTRÓNICA

Componentes para la protección y medición electrónica, Conectores PCB, Fusibles, Relés, Pilas

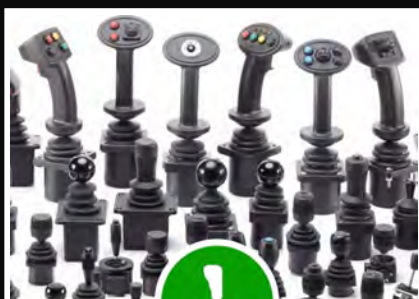

JOYSTICKS

Joysticks, Trackballs, Single Axis, HandGrips



TECLADOS

Teclados y Paneles



PILOTOS

Indicadores led, Pilotos, Lámparas



SENSORES

Sensores Reed, Sensores y Limitadores de temperatura, Sensores de proximidad



MOTION

Motores, Motorreductores, Encóders, Solenoides, Actuadores lineales, PMG



VENTILACIÓN

Ventiladores de AC y DC, accesorios y unidades de ventilación