

MS-2431-4





MS-2431-4

Press-Fit Sensor Change-over

Electrical Characteristics		@ 25 °C
Contact form		C
Contact rating max.	W / VA	3
Switching voltage max.	VDC	30
	VAC	30
Switching current max.	A	0.2
Carry current max.	A	0.5
Breakdown voltage min.	VDC	150
Total resistance max. (initial)	mΩ	200
Insulation resistance min.	Ω	10 ⁹

Features
<ul style="list-style-type: none"> ➤ Easily mountable and removable as no tools or screws required ➤ Replaces various competitors types ➤ Customized types available ➤ Non pole oriented actuation


Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	10 - 30
Drop out min.	AT	6
Test coil	TC	200
Test equipment tolerance	± AT	2

Approvals
 

Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	200
Resonant frequency typ.	Hz	6000
Operate time max. (incl. bounce)	ms	200
Release time max.	ms	0.5

Environmental Characteristics		
Operating temperature	°C	-20 to +85
Vibration (10-1000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	30

© PIC GmbH

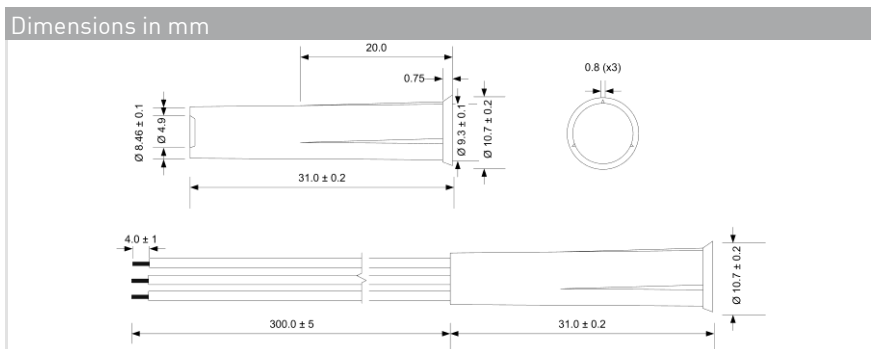

Ordering Information	
Packing Unit	50 pcs
Weight per piece	0 g
Weight per package	0 g
Standard AT Ranges	
	1 = 10 to 15 AT
	2 = 15 to 20 AT
	3 = 20 to 25 AT
	4 = 25 to 30 AT
Ordering Example	
MS-2431-4-1-0300 describes MS-2431 Change over with 10-15 AT	

MS-2431-4





MS-2431-4

Press-Fit Sensor Change-over

Material Information

	Material	Colour
Housing	PA-GF	white
Cable	UL 1569 , AWG 24, 4mm stripped and tinned	black, red and brown
Potting compound	Epoxy	black

Test Procedure of final Reed Sensor

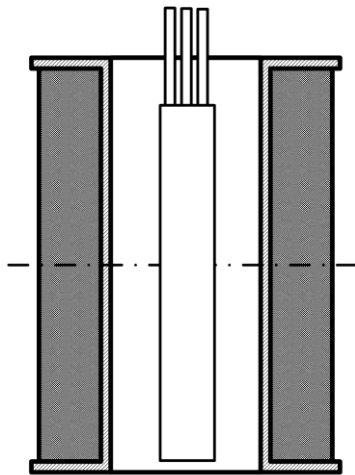

Test Parameters

Test coil	TC- 324	
Test programs		
	AT range	Test program
1 =		MS-2431-4-1
2 =		MS-2431-4-2
3 =		MS-2431-4-3
4 =		MS-2431-4-4

Remarks

When mounted onto ferromagnetic parts switching distance of MS-2431-4 may reduce.
Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Recommended drill diameter 9.5 mm

Matching actuator MSM-... available as well.