

Ultimag® Size 4EM

Part Number: 197124-0XX

All products are RoHS Compliant

ROTARY Ultimag®

Performance

Maximum Duty Cycle	100%	50%	25%	10%
K_M (oz-in./√watt)	5.8	5.1	4.6	4.3
Maximum ON Time (sec) when pulsed continuously ¹	∞	40	15	4
Maximum ON Time (sec) for single pulse ²	∞	108	34	9
Typical Energize Time (msec) ³	6	5	4.5	3.5
Watts (@ 20°C)	14.5	29	58	145
Ampere Turns (@ 20°C)	510	721	1020	1613

Coil Data

awg (0XX) ⁴	Resistance (@20°C)	# Turns ⁵	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
23	0.71	104	3.2	4.5	6.4	10.1
24	1.54	174	4.7	6.7	9.4	14.9
25	2.15	195	5.6	7.9	11.2	17.6
26	3.01	219	6.6	9.3	13.2	20.9
27	5.78	328	9.2	12.9	18.3	28.9
28	8.09	368	10.8	15.3	21.7	34.3
29	14.40	515	14.5	20.4	28.9	45.7
30	20.11	575	18.9	24.2	37.7	59.6
31	34.40	774	22.3	31.6	44.6	71.0
32	56.60	1008	28.7	40.5	57.0	91.0
33	91.40	1288	36.0	51.5	73.0	115.0

- ¹ Continuously pulsed at stated watts and duty cycle
- ² Single pulse at stated watts (with coil at ambient room temperature 20°C)
- ³ Typical energize time based on no load condition. Times shown are for half of full rotary stroke starting at center-off position.
- ⁴ Other coil awg sizes available — please consult factory
- ⁵ Reference number of turns

WARNING: Exposed magnet may affect pacemakers. In the event a product unit's magnet is exposed due to product disassembly, pacemaker wearers should distance themselves 10 feet from exposed magnet.

Specifications

Dielectric Strength	1000 VRMS (23 awg); 1200 VRMS (24-33 awg)
Recommended Minimum Heat Sink	Maximum watts dissipated by the Ultimag are based on an unrestricted flow of air at 20°C, with the Ultimag mounted on the equivalent of an aluminum plate measuring 6-1/4" square by 1/8" thick (15.9 cm sq. x 0.32 cm)
Thermal Resistance	7.6°C/watt with heatsink; 15.0°C/watt without heatsink
Rotor Inertia	8.43×10^{-7} (kgm ²)
Peak Torque Rating (Tp)	45 oz.in. (0.32 Nm)
Power Input	145 watts (stalled at Tp; 25°C; Pp)
Number of Phases	1
Static Friction (Tf)	1 oz.in. max. (7mNm)
-3dB Closed Loop	78 Hz
Number of Poles	6
Weight:	7.6 oz. (215 gms)


How to Order

Add the coil awg number (0XX) to the part number (for example: to order a 25% duty cycle rated at 18.3 VDC, specify 197124-027).

Please see www.johnsonelectric.com for our list of stock products available through distribution.

Dimensions

Inches (mm)

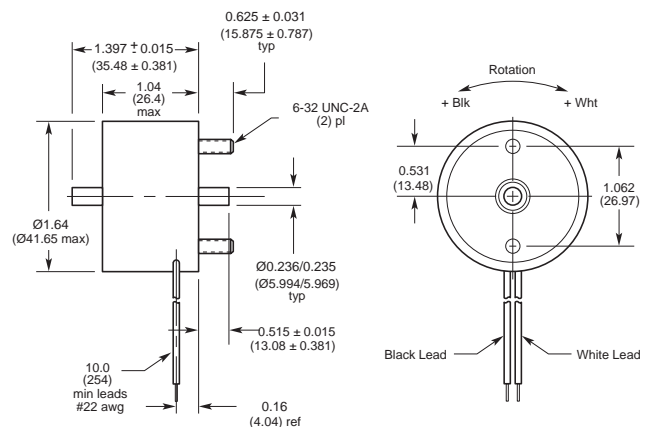

All specifications subject to change without notice.

Ledex® Solenoids



ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
08918 Badalona SPAIN

Tel. +34 902 450 160
info@ermec.com
www.ermec.com

www.johnsonelectric.com


ERMEC, S.L. - MADRID
C/ Puerto Rico, 4
28222 Majadahonda (Madrid) SPAIN

1.937.454.2345


Fax: 1.937.898.8624

bilbao@ermec.com
portugal@ermec.com


Ultimag® Size 4EM

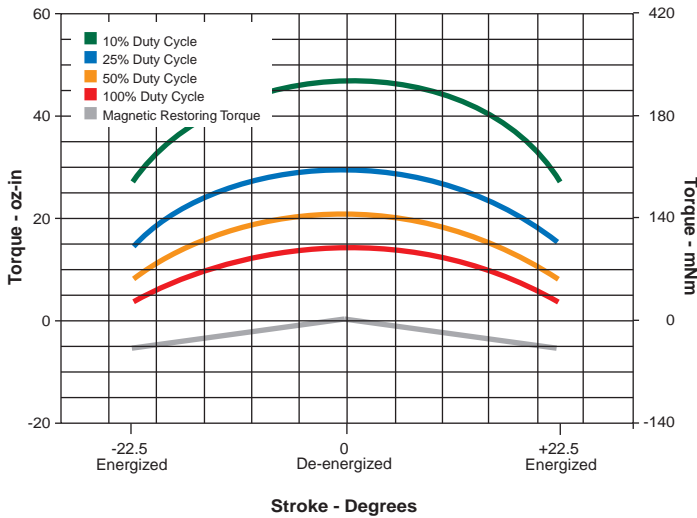

Graph 1 shows three position operation. In any mode, the armature seeks center of stroke at zero power. Applying a positive or negative voltage causes the shaft to rotate clockwise or counter clockwise. When power is removed, the restoring torque is applied to the load, or alternatively, the shaft can be driven to center under power.

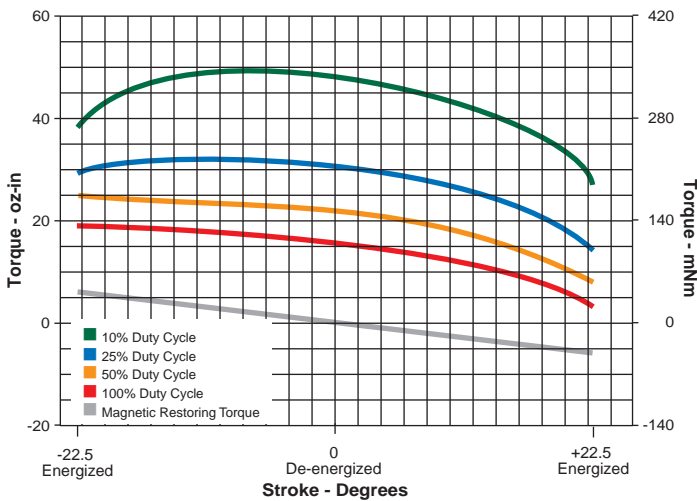

Graph 2 shows operation end-to-end. Note the high starting torque for high starting acceleration or for stopping the load by means of reverse voltage at the end of the stroke. If the device is used in a full stroke application, the load can be externally latched, detented, or biased to either end of stroke.

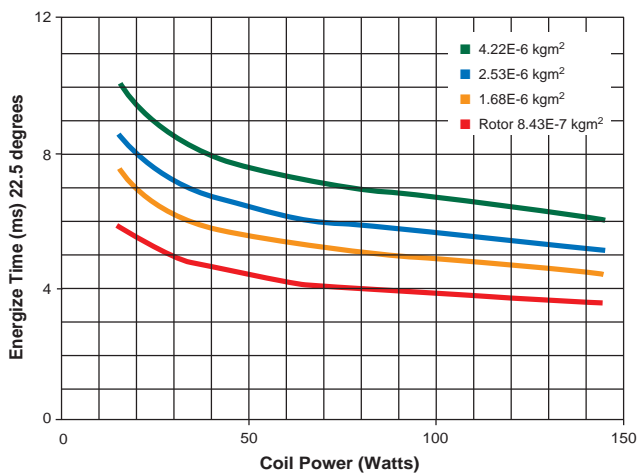

Graph 3 shows how speed varies with load. Each curve represents a different inertial load, which is a multiple of the armature inertia.

Calculate the inertia of your system, then use this chart to determine Ultimag speed in your application. Inertia determination of simple shapes is shown in most engineering handbooks; complex shapes are calculated in solid modeling software or are measured empirically. This graph represents half of the full rotary stroke starting at the center-off position.

Torque values for reference only.

Ultimag® Size 5EM

Part Number: 194644-0XX

All products are RoHS Compliant

ROTARY Ultimag®

Performance

Maximum Duty Cycle*	100%	50%	25%	10%
K_M (oz-in-/watt)	10.9	9.2	8.2	6.9
Maximum ON Time (sec) when pulsed continuously ¹	∞	40	15	4
Maximum ON Time (sec) for single pulse ²	∞	109	36	10
Typical Energize Time (msec) ³	6.0	5.5	4.5	4.0
Watts (@ 20°C)	21	42	84	210
Ampere Turns (@ 20°C)	621	878	1242	1964

Coil Data

awg (0XX) ⁴	Resistance (@20°C)	# Turns ⁵	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
23	1.05	128	4.7	6.6	9.4	14.8
24	2.24	213	6.9	9.7	13.7	21.7
25	3.16	240	8.1	11.5	16.3	25.8
26	4.45	270	9.7	13.7	19.3	30.6
27	8.50	404	13.4	18.9	26.7	42.2
28	11.90	452	15.8	22.3	31.6	50.0
29	21.10	630	21.0	29.7	42.1	67.0
30	29.50	705	24.9	35.2	49.8	78.7
31	50.30	948	32.5	45.9	65.0	103.0
32	82.70	1232	41.7	58.9	83.0	132.0
33	134.00	1576	53.0	74.9	106.0	168.0

*Not recommended for full stroke at 100% duty cycle.

- Continuously pulsed at stated watts and duty cycle
- Single pulse at stated watts (with coil at ambient room temperature 20°C)
- Typical energize time based on no load condition. Times shown are for half of full rotary stroke starting at center-off position.
- Other coil awg sizes available — please consult factory
- Reference number of turns

WARNING: Exposed magnet may affect pacemakers. In the event a product unit's magnet is exposed due to product disassembly, pacemaker wearers should distance themselves 10 feet from exposed magnet.

Specifications

Dielectric Strength	1000 VRMS (23 awg); 1200 VRMS (24-33 awg)
Recommended Minimum Heat Sink	Maximum watts dissipated by the Ultimag are based on an unrestricted flow of air at 20°C, with the Ultimag mounted on the equivalent of an aluminum plate measuring 7-1/2" square by 1/8" thick (19.1 cm sq. x 0.32 cm)
Thermal Resistance	5.36°C/watt with heatsink; 12.9°C/watt without heatsink
Rotor Inertia	3.085×10^{-6} (kgm ²)
Peak Torque Rating (Tp)	100 oz.in. (0.7 Nm)
Power Input	210 watts (stalled at Tp; 25°C; Pp)
Number of Phases	1
Static Friction (Tf)	1 oz.in. max. (7mNm)
-3dB Closed Loop	66.5 Hz
Number of Poles	6
Weight:	12.8 oz. (363 gms)


How to Order

Add the coil awg number (0XX) to the part number (for example: to order a 25% duty cycle rated at 26.7 VDC, specify 194644-027).

Please see www.johnsonelectric.com for our list of stock products available through distribution.

Dimensions

Inches (mm)

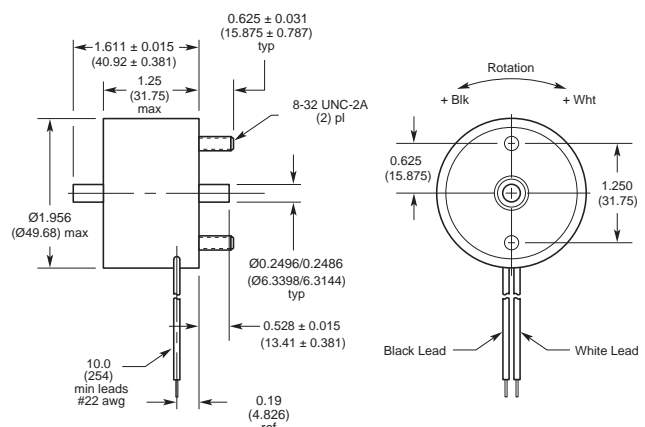

All specifications subject to change without notice.

Ledex® Solenoids



ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
08918 Badalona SPAIN

Tel. +34 902 450 160
info@ermec.com
www.ermec.com

www.johnsonelectric.com


ERMEC, S.L. - MADRID
C/ Puerto Rico, 4
28222 Majadahonda (Madrid) SPAIN

1.937.454.2345


Fax: 1.937.898.8624

bilbao@ermec.com
portugal@ermec.com

Ultimag® Size 5EM

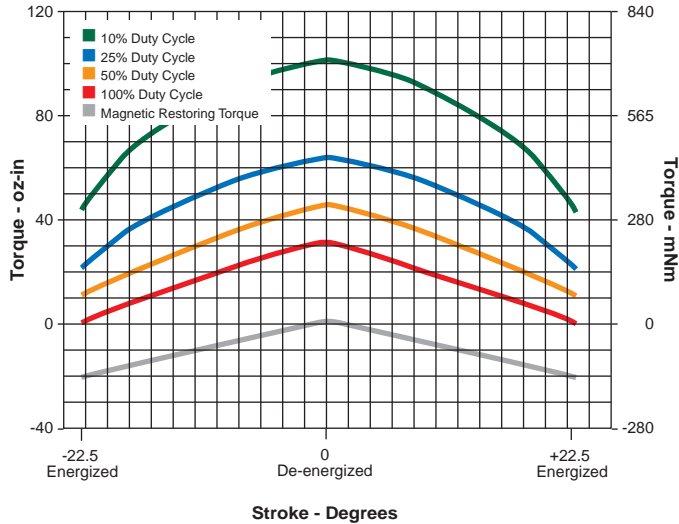


Graph 1 shows three position operation. In any mode, the armature seeks center of stroke at zero power. Applying a positive or negative voltage causes the shaft to rotate clockwise or counter clockwise. When power is removed, the restoring torque is applied to the load, or alternatively, the shaft can be driven to center under power.

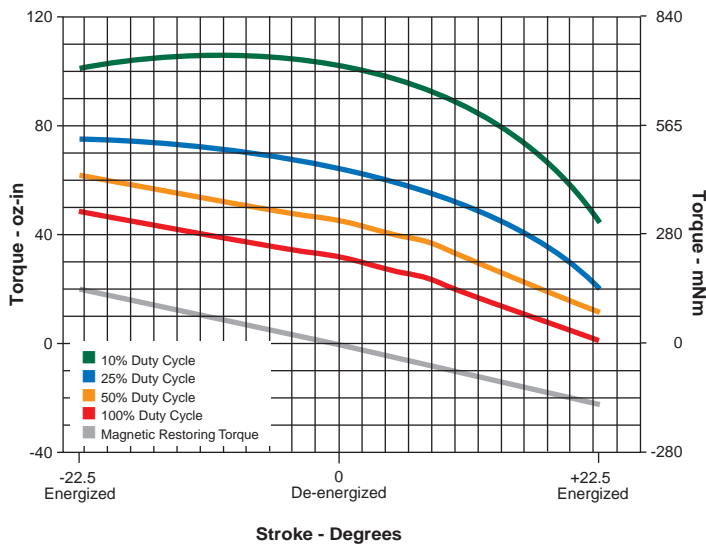

Graph 2 shows operation end-to-end. Note the high starting torque for high starting acceleration or for stopping the load by means of reverse voltage at the end of the stroke. If the device is used in a full stroke application, the load can be externally latched, detented, or biased to either end of stroke.

NOTE: The Size 5EM Ultimag is not recommended for full stroke operation at 100% duty cycle.

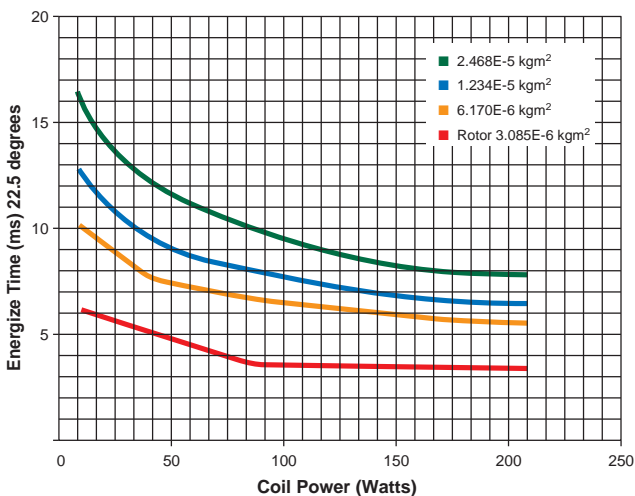

Graph 3 shows how speed varies with load. Each curve represents a different inertial load, which is a multiple of the armature inertia.

Calculate the inertia of your system, then use this chart to determine Ultimag speed in your application. Inertia determination of simple shapes is shown in most engineering handbooks; complex shapes are calculated in solid modeling software or are measured empirically. This graph represents half of the full rotary stroke starting at the center-off position.

Torque values for reference only.

Ultimag® Size 6EM

Part Number: 197126-0XX

All products are RoHS Compliant

ROTARY Ultimag®

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	40	15	5
Maximum ON Time (sec) for single pulse ²	∞	143	47	11
Typical Energize Time (msec) ³	17	12	10.5	8.5
Watts (@ 20°C)	32	64	128	320
Ampere Turns (@ 20°C)	980	1386	1960	3100

Coil Data

awg (0XX) ⁴	Resistance (@20°C)	# Turns ⁵	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
23	2.65	267	9.2	13.0	18.4	29.1
24	5.02	396	12.7	17.9	25.4	40.1
25	7.03	444	15.0	21.2	30.0	47.4
26	12.60	625	20.1	28.4	40.2	63.5
27	17.60	700	23.8	33.6	47.5	75.1
28	29.90	936	30.9	43.7	61.9	97.8
29	49.50	1225	39.8	56.3	80.0	126.0
30	79.70	1560	51.0	71.4	101.0	160.0
31	126.50	1962	64.0	90.0	127.0	201.0
32	198.30	2440	80.0	112.6	159.0	252.0
33	306.20	2992	99.0	140.0	198.0	313.0

- Continuously pulsed at stated watts and duty cycle
- Single pulse at stated watts (with coil at ambient room temperature 20°C)
- Typical energize time based on no load condition. Times shown are for half of full rotary stroke starting at center-off position.
- Other coil awg sizes available — please consult factory
- Reference number of turns

WARNING: Exposed magnet may affect pacemakers. In the event a product unit's magnet is exposed due to product disassembly, pacemaker wearers should distance themselves 10 feet from exposed magnet.

Specifications

Dielectric Strength	1000 VRMS (23 awg); 1200 VRMS (24-33 awg)
Recommended Minimum Heat Sink	Maximum watts dissipated by the Ultimag are based on an unrestricted flow of air at 20°C, with the Ultimag mounted on the equivalent of an aluminum plate measuring 12-3/8" square by 1/8" thick (31.43 cm sq. x 0.32 cm)
Thermal Resistance	3.58°C/watt with heatsink; 8.52°C/watt without heatsink
Rotor Inertia	5.676 x 10 ⁻⁶ (kgm ²)
Peak Torque Rating (Tp)	225 oz.in. (1.6 Nm)
Power Input	320 watts (stalled at Tp; 25°C; Pp)
Number of Phases	1
Static Friction (Tf)	1 oz.in. max. (7mNm)
-3dB Closed Loop	12.8 Hz
Number of Poles	6
Weight:	1.6 lbs. (0.73 kg)


How to Order

Add the coil awg number (0XX) to the part number (for example: to order a 25% duty cycle rated at 25.4 VDC, specify 197126-024).

Please see www.johnsonelectric.com for our list of stock products available through distribution.

Dimensions

Inches (mm)

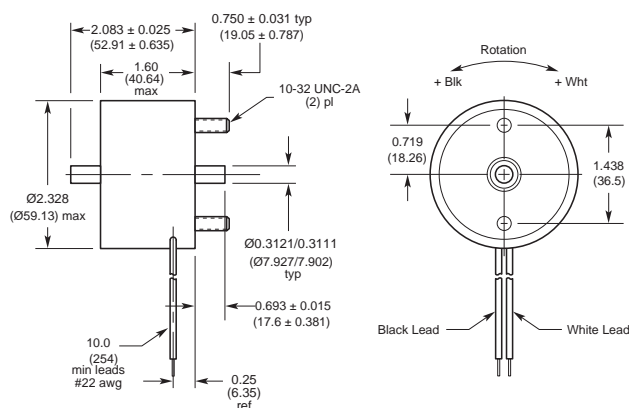

All specifications subject to change without notice.

Ledex® Solenoids



ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
08918 Badalona SPAIN

Tel. +34 902 450 160
info@ermec.com
www.ermec.com

www.johnsonelectric.com


ERMEC, S.L. - MADRID
C/ Puerto Rico, 4
28222 Majadahonda (Madrid) SPAIN

1.937.454.2345


Fax: 1.937.898.8624

bilbao@ermec.com
portugal@ermec.com


Ultimag® Size 6EM

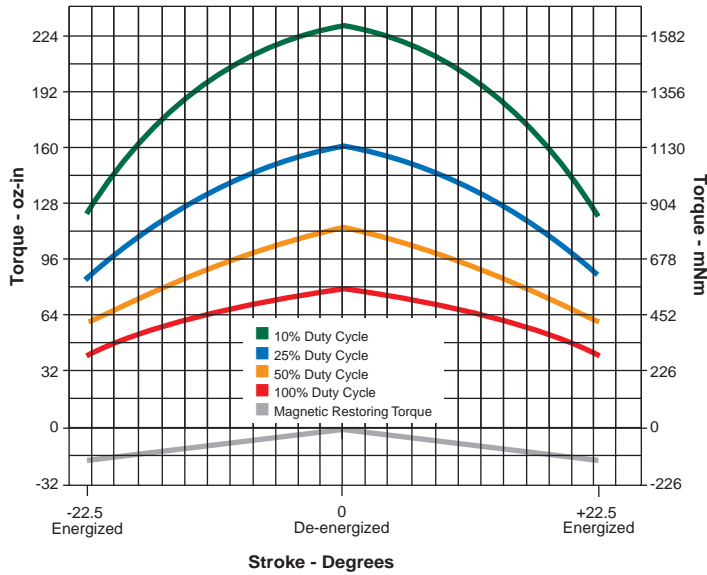

Graph 1 shows three position operation. In any mode, the armature seeks center of stroke at zero power. Applying a positive or negative voltage causes the shaft to rotate clockwise or counter clockwise. When power is removed, the restoring torque is applied to the load, or alternatively, the shaft can be driven to center under power.

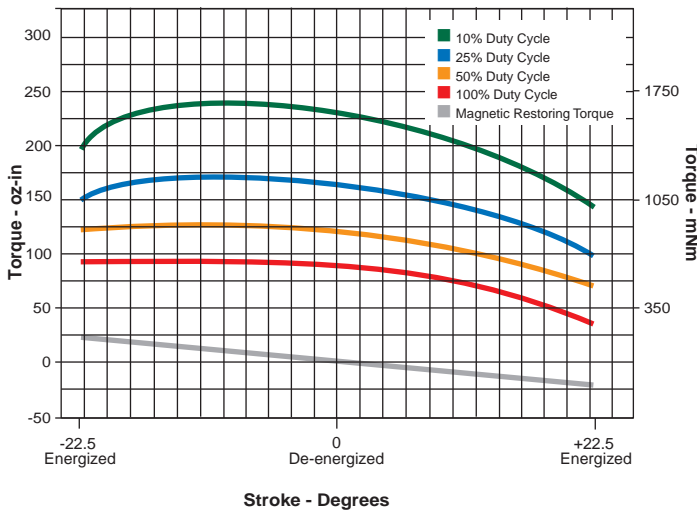

Graph 2 shows operation end-to-end. Note the high starting torque for high starting acceleration or for stopping the load by means of reverse voltage at the end of the stroke. If the device is used in a full stroke application, the load can be externally latched, detented, or biased to either end of stroke.

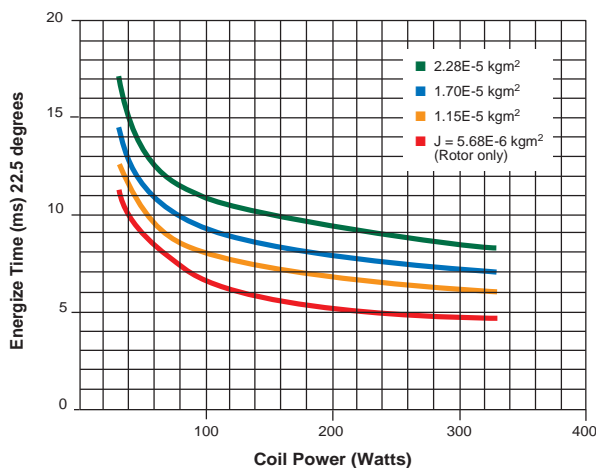

Graph 3 shows how speed varies with load. Each curve represents a different inertial load, which is a multiple of the armature inertia.

Calculate the inertia of your system, then use this chart to determine Ultimag speed in your application. Inertia determination of simple shapes is shown in most engineering handbooks; complex shapes are calculated in solid modeling software or are measured empirically. This graph represents half of the full rotary stroke starting at the center-off position.

Torque values for reference only.