


Thermal Protector TB02

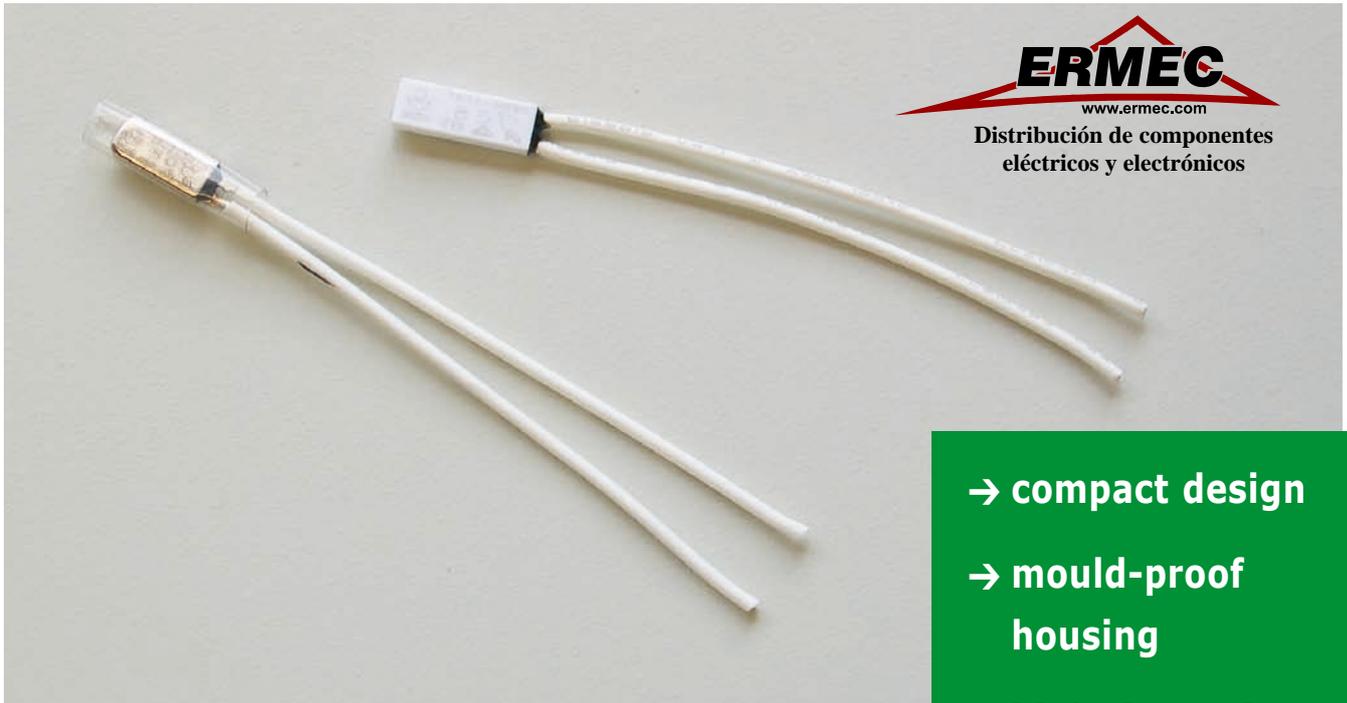

- compact design
- mould-proof housing
- high thermal sensitivity
- high mechanical stability (especially metal housing)

Applications

Thermal overload protection of small electrical equipment, small electric motors, heating appliances, fluorescent lighting ballasts and others.





After cooling down to the snap-back temperature of the bimetal disk, the protector returns to its initial position automatically.

Function

The thermal protector TB02 normally operates not current sensitive. Temperature detection is realized by a bimetal snap disk.

Using high-impedance bimetal material, the response time of the protector can be reduced (moderate current sensitivity).



The thermal protector is available with normally closed (NC) as well as normally opened (NO) contacts.

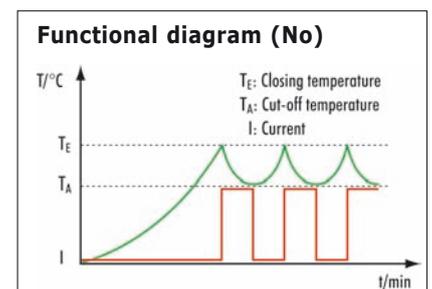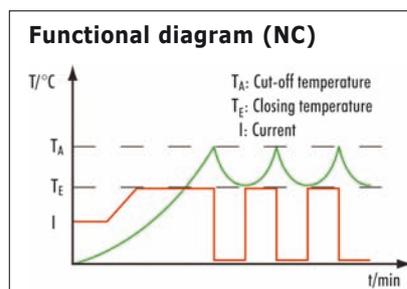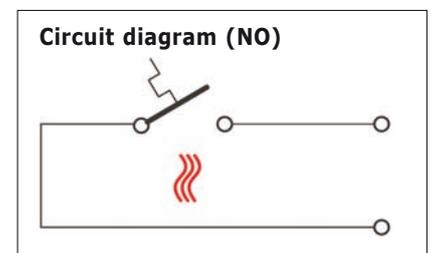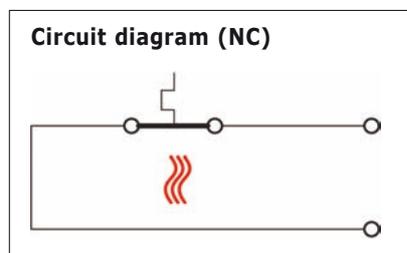

Technical Data Thermal Protector TB02

| | |
|---------------------------------|--|
| Switching Capacity | 250 V / 50 Hz, 2 A |
| Minimum Current | 50 mA |
| Max. Switching Capacity | 250 VAC, 2 A |
| 10.000 Cycles | 115 VAC, 3 A 24 VDC, 3 A 12 VDC, 4 A |
| Action Type | 3 C |
| Switching Temperature | 30°C – 155°C (± 5 K) |
| Switching Differential | 10 – 50 k (± 15 K) depending on Switching Temperature |
| Max. Ambient Temperature | 160°C |
| Approvals | UL/CSA 2111; VDE 60730-2-2; CQC |

Dimensions TB02

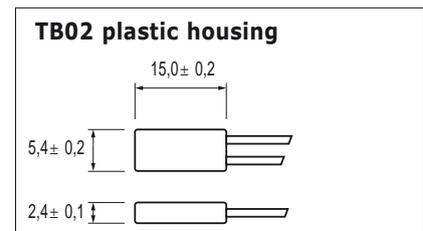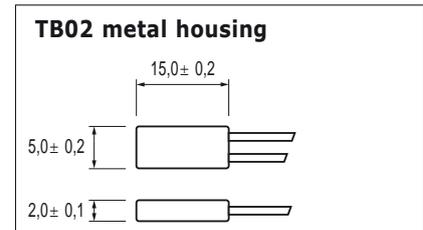


Technical Informations

The thermal protector TB02 is enclosed by a mould-proof housing which is available as metal or plastic type.


Electrical insulation of the metal housing is possible by means of insulation tubes. Its rectangular homogeneous design provides efficient and fast temperature transfer.

Standard leads are 70 mm (22 AWG). Other leads (diameter, stripped etc.) are available on request.

Tripping Temperature vs. Current

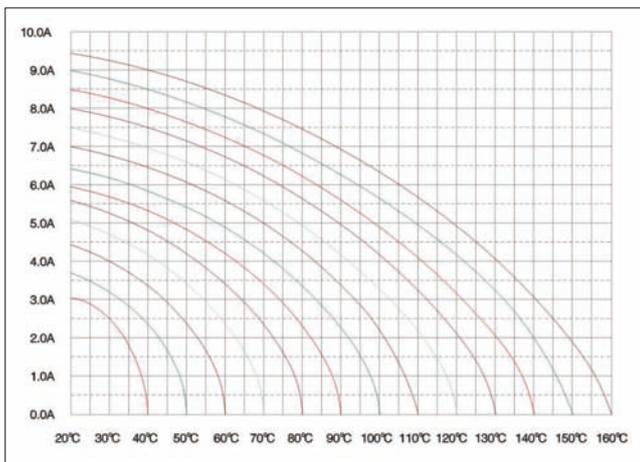


Current vs. Tripping Time

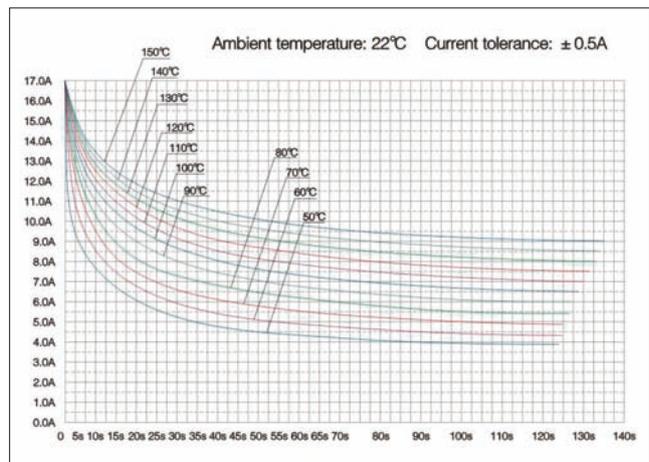

Coding system

TB02 - B - B 8 D - XXX

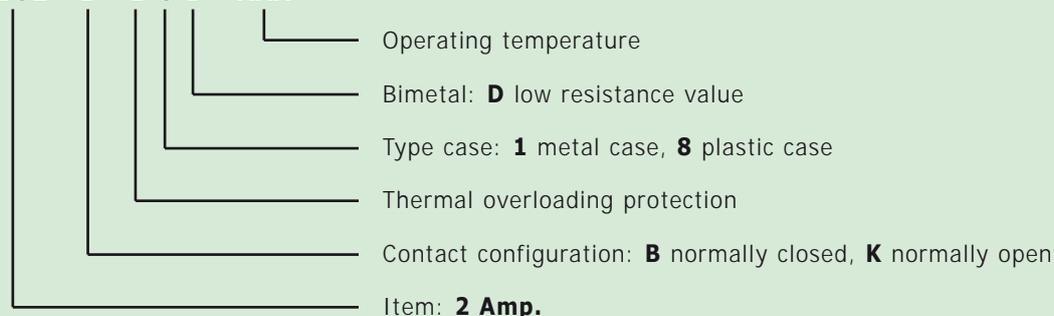

ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
E-08918 Badalona
(Spain)

Tel.: (+34) 902 450 160
Fax: (+34) 902 433 088
info@ermec.com
www.ermec.com

ERMEC, S.L. MADRID
C/ Sagasta, 8, 1ª planta
E-28004 Madrid
(Spain)

PORTUGAL
portugal@ermec.com
BILBAO
bilbao@ermec.com



Distribución de componentes
eléctricos y electrónicos