


HHC71G

High power industrial relays

DURAKOOL

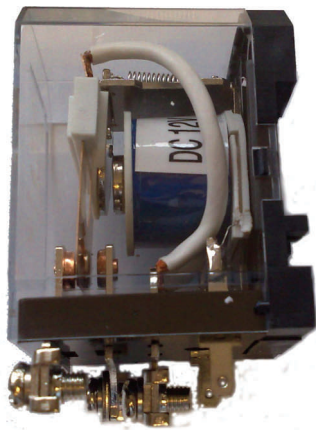

- Up to 60A switching capability
- DIN Rail or Screw Mounting
- AC & DC Coils
- Dust Cover as standard

- RoHS Compliant
- UL Recognized



Contacts

Number and type of contacts	SPST-NO, SPST-NC, SPDT	
Contact Material	Silver Alloy	
Rated voltage / max. switching voltage	250VAC / 24VDC	
Max. breaking capacity	60A	
Coil		
Rated voltage 50/60Hz	AC	6...380V - See Table 2
	DC	6...110V - See Table 1
Rated power consumption	AC	6.5VA
	DC	2W
Insulation		
Insulation resistance	500M Ω 500VDC	
Dielectric strength		
• between coil and contacts	2500VAC	
• Between contacts	1500VAC	
General Data		
Ambient temperature:	(operating / storage)	-40°C to +70°C
Operating time (typical)	\leq 25ms	
Release time (typical)	\leq 25ms	
Electrical life:	(resistive AC1)	5 x 10 ⁴
Mechanical life (cycles)	1 x 10 ⁶	
Cover protection category	IP20	
Shock resistance	Functional 10G; Destruction 100G	
Vibration resistance	10-55Hz at D.A 1.5mm	
Weight (approx)	180g	



© American Electronic Components Inc 2008

American Electronic Components Inc.,
1101 Lafayette Street, Elkhart, Indiana. USA
Tel: +1-574-295-6330 Fax: +1-574-293-8013
Email: sales@aecsensors.com
<http://www.aecsensors.com>

HHC71G

High power industrial relays



Coil Data

Table 1

Coil Voltage Code	Nominal Voltage	Resistance	Must Operate	Must Release
			Voltage max.	Voltage min.
	VDC	(Ω) \pm 10%	VDC	VDC
1006	6	18	4.50	0.6
1009	9	40.5	6.75	0.9
1012	12	72	9.00	1.2
1024	24	288	18.00	2.4
1048	48	1125	36.00	4.8
1060	60	1800	45.00	6.0
1110	110	6050	82.50	11.00

Coil Data

Table 2

Coil Voltage Code	Nominal Voltage	Resistance	Must Operate	Must Release
			Voltage max.	Voltage min.
	VAC	(Ω) \pm 10%	VAC	VAC
5006	6	2.0	4.80	1.8
5009	9	4.4	7.2	2.7
5012	12	7.8	9.6	3.6
5024	24	31.0	19	7.2
5048	48	124.0	38.4	14.4
5110	110	650.0	88.0	33.0
5220	220	2600.0	176	66.0



American
Electronic
Components, Inc.

© American Electronic Components Inc 2008


American Electronic Components Inc.,
1101 Lafayette Street, Elkhart, Indiana. USA
Tel: +1-574-295-6330 Fax: +1-574-293-8013
Email: sales@aecsensors.com
<http://www.aecsensors.com>

HHC71G

High power industrial relays




Ordering Codes

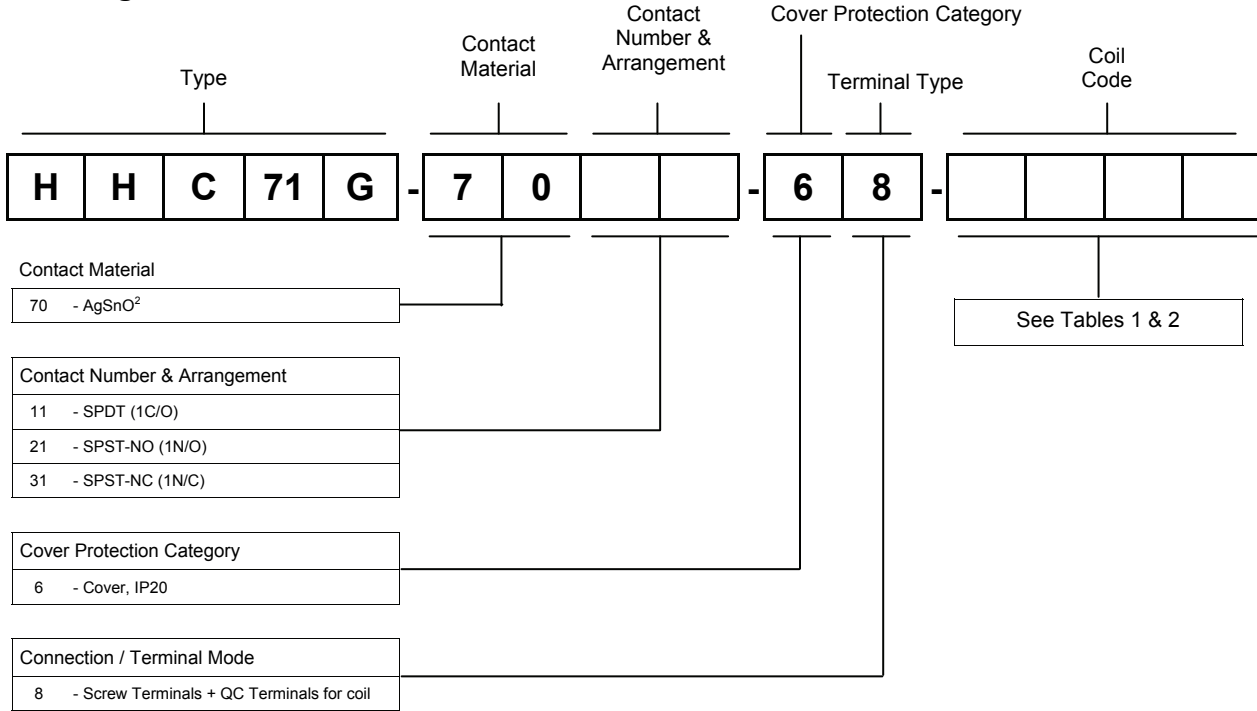


Overall Dimensions

Fig. 1

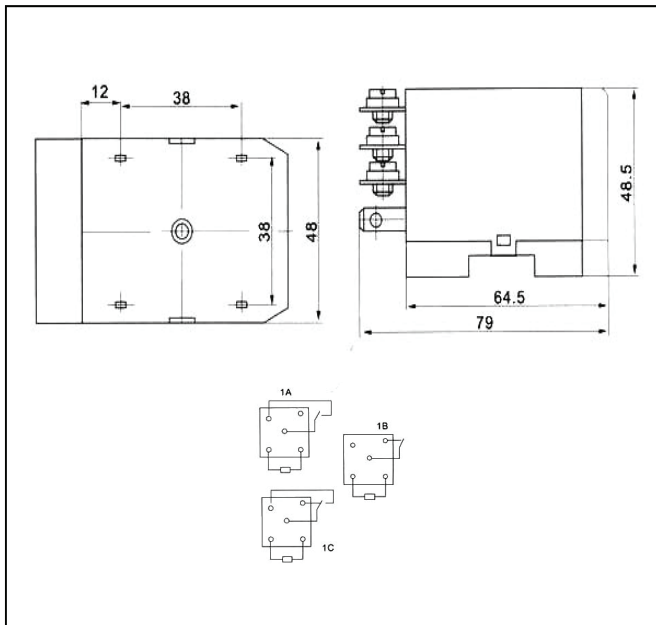

Reference Graphs

Fig. 2

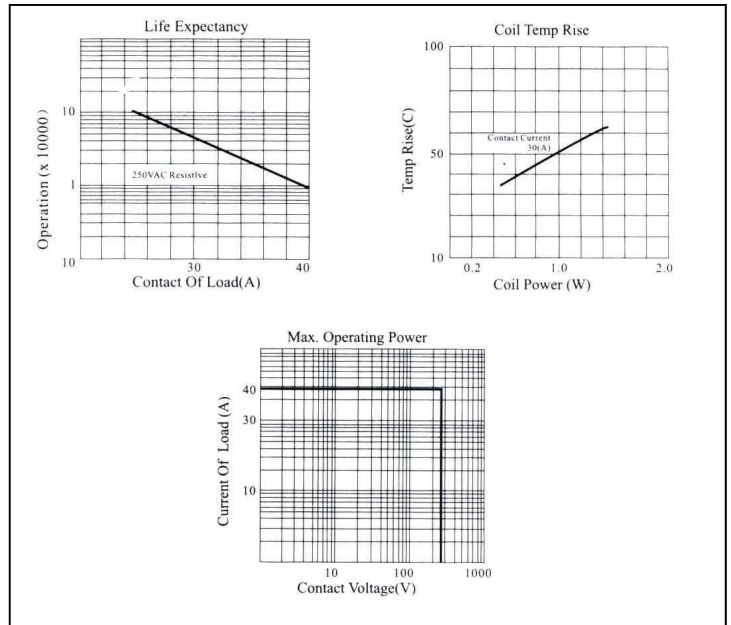

American Electronic Components, Inc.

© American Electronic Components Inc 2008

American Electronic Components Inc.,
 1101 Lafayette Street, Elkhart, Indiana, USA
 Tel: +1-574-295-6330 Fax: +1-574-293-8013
 Email: sales@aecensors.com
<http://www.aecensors.com>