

3005 Refrigerator Door Switches Splash resistant

Approvals and specifications



3005 25W 25T85 5E4 (50,000 Operations) 250Vac
3006 65W 25T85 5E4 (50,000 Operations) 250Vac



UL 0.3A 250Vac
UL 0.2A 125Vac

These products require 3mm minimum actuator stroke to ensure switch action and rating above.

μ contact gap.
Technical data on pages 4 & 5.

- ▶ Door switches
- ▶ Momentary on and momentary off switching
- ▶ Splash resistant
- ▶ Choice of terminal orientation
- ▶ Choice of actuators



C3005CB ---



C3005BL ---


C 3005 C B ---

TERMINAL FUNCTION ACTUATOR BODY COLOUR, ETC


| ▶ TERMINAL | ▶ FUNCTION | ▶ ACTUATOR | ▶ BEZEL / TERM ORIENTATION | ▶ OPTIONS |
|----------------------------------|---|-----------------|--|---|
| <p>C</p> <p>6.3 x 0.8</p> | <p>3005</p> <p>ON - OFF (momentary OFF) 1mm max travel to OFF position</p> | <p>B</p> | <p>R L B</p> <p>Terminal direction (viewed from hinge end)</p> <p>Panel cut-out: 12.1/12.2 mm, 25.4/25.5 mm</p> <p>Bezel: 14.0 mm, 30.2 mm</p> <p>Bezel Profile: 5.0 mm</p> | <p>Finish Gloss finish only</p> <p>Colour White is standard</p> <p>Call sales for custom colours. A full range is available for large orders.</p> |
| <p>H</p> <p>4.8 x 0.8</p> | <p>3006</p> <p>ON - OFF (momentary ON) 3mm min travel to ON position</p> | <p>C</p> | | |

Dimensions (mm) (C terminals shown)

3005

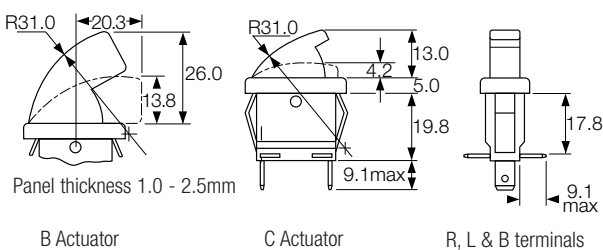

3006

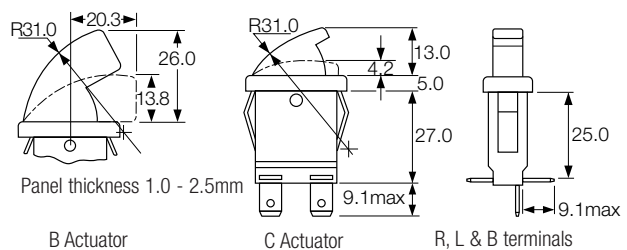

refrigerator switches