

Fuseholders 5 x 20 mm



- ▶ 5 x 20mm fuses
- ▶ Finger grip or screwdriver slot knob options.
- ▶ Hand release and screwdriver release
- ▶ PC2 protection category
- ▶ Solder & 2.8mm terminals
- ▶ Raised or low profile bezels
- ▶ Snap in or threaded bushing mounting options
- ▶ Snap fit or screw to panel fixing

Approvals and specifications



6.3A 250Vac (max fuse rating*) T-55 to T+70 (ambient)
Maximum dissipation wattage: 1.5W



6.3A UL 94V2 UL file E92075 CSA file LR44770

These products comply with safety category PC2.

*Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

These fuseholders are fitted with combination (solder/2.8) mid-body terminals. It has not been possible to show both views here.



M520
Terminal Cover




A0033 00
In-line 5 x 20 fuseholder
Extra low voltage 5A Max




▶ TERMINAL	▶ BODY AND CAP	▶ PANEL HOLE
<p>T</p> <p>Solder</p>	<p>0332 Finger grip</p> <p></p> <p>0333 Screwdriver release</p> <p></p>	<p>RA</p>
<p>B</p> <p>2.8 x 0.5</p>	<p>0340 Screwdriver release</p> <p></p> <p>0341 Screwdriver release</p> <p></p>	<p>RD</p>

DIMENSIONS (mm)


0332 (T terminal shown)



0333 (T terminal shown)



0340 (T terminal shown)

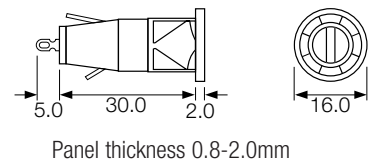

0341 (T terminal shown)

