

# Indicator Lights - Sealed to IP67


















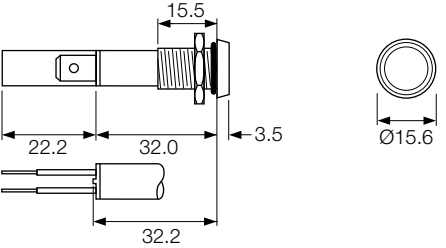





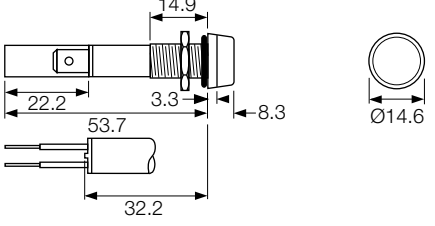





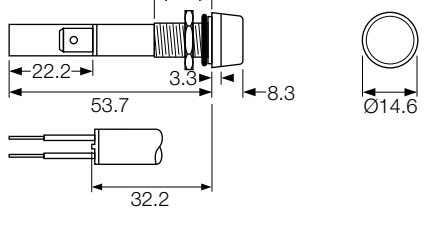

## Colours and voltages:

- ⊖ Neon Available with Red, Amber, Green or Clear lenses  
100/130V (marked 110V), 200/250V (marked 230V)
- ▶ LED - DC Red, Yellow, Green, Blue, White  
2.0/2.2V Resistors for other voltages available.
- ▶ LED - AC Red, Yellow, Green, Blue, White  
110-230V ac operation.
- ⊗ Filament lamp Available with Red, Amber, Green, Clear or Blue lenses  
6V, 12/14V, 24/28V.

- ▶ IP67 Panel Sealing
- ▶ Supplied complete with gaskets/'O' rings
- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 7.6 to 22.9mm diameter
- ▶ Red, amber, green, blue and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles

## To create a catalogue number:

Refer to the 2 columns below (terminal and type), then state: Lens colour, voltage and whether neon, LED or filament lamp

TERM	TYPE	PANEL	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
L	(L) 1041 OS Chrome bezel 	6.3 5.3 max	⊖ ▶ DC ▶ AC ⊗	   	
L	(L) 0245 OS Chrome bezel 	7.1 4.6 max	⊖ ▶ DC ▶ AC ⊗	   	
L C 6.3 K 2.8 H 4.8	(C) 0275 OS Chrome bezel 	10.0 11.5 max	⊖ ▶ DC ▶ AC ⊗	   	
L C 6.3 K 2.8 H 4.8	(C) 0277 OS Chrome bezel 	10.0 11.5 max	⊖ ▶ DC ▶ AC ⊗	   	
L C 6.3 K 2.8 H 4.8	(C) 0177 OS Chrome bezel 	12.7 11.5 max	⊖ ▶ DC ▶ AC ⊗	   	
C 6.3	(C) 1092 FFS 	19.0 4.0 max	⊖ ▶ DC ▶ AC	