

Indicator Lights Neon, LED and Filament Lamp


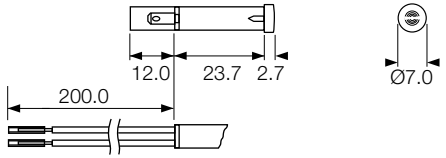

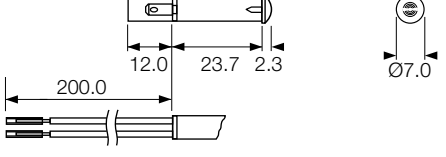

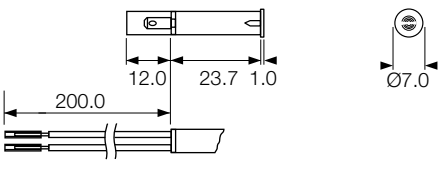

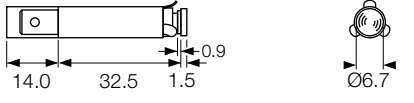



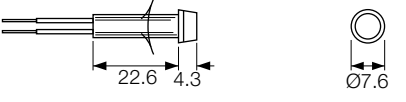
Colours and voltages:




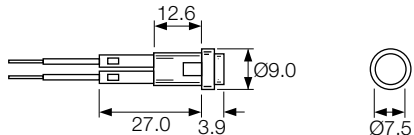

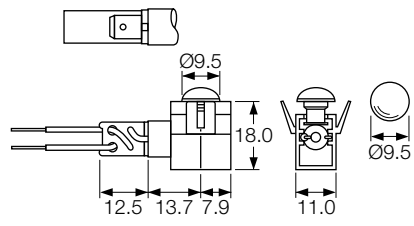

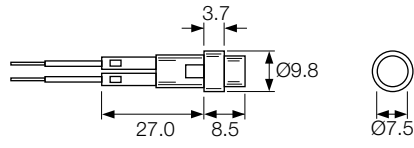

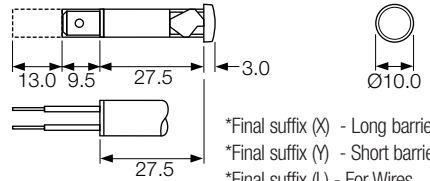

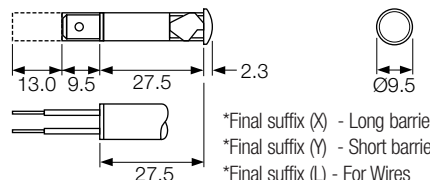
-  **Neon** Available with Red, Amber, Green or Clear lenses
100/130V (marked 110V), 200/250V (marked 230V)
-  **LED - DC** Red, Yellow, Green, Blue, White
2.0/2.2V Resistors for other voltages available.
-  **LED - AC** Red, Yellow, Green, Blue, White
110-230V ac operation.
-  **Filament lamp** Available with Red, Amber, Green, Clear or Blue lenses
6V, 12/14V, 24/28V.

- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 6.7 to 16.3mm diameter
- ▶ Red, amber, green, blue and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles

To create a catalogue number:

Refer to the 2 columns below (terminal and type), then state: Lens colour, voltage and whether neon, LED or filament lamp

TERM	TYPE	PANEL & °C	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
B 2.8 L	(B) 0566 A 	6.0 2.0max page 6	Neon LED-DC LED-AC	KEBA KEBA KEBA	
B 2.8 L	(B) 0566 B 	6.0 2.0max page 6	Neon LED-DC LED-AC	KEBA KEBA KEBA	
B 2.8 L	(B) 0566 C 	6.0 2.0max page 6	Neon LED-DC LED-AC	KEBA KEBA KEBA	
C 6.3 L	(C) 0145 AA 	5.8 3.0max page 6	Neon LED-DC LED-AC Filament lamp	FUL KEBA KEBA KEBA	
L W	(L) 1041 00 Chrome bezel 	6.3 6.3max page 6	Neon LED-DC LED-AC Filament lamp	FUL KEBA KEBA KEBA	
L W	(L) 1045 00 Chrome bezel available 	6.3 10.0max page 6	Neon LED-DC LED-AC Filament lamp	FUL KEBA KEBA KEBA	

TERM	TYPE	PANEL & °C	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
L W	(L) 0245 00 Chrome bezel available 	7.1 6.3max page 6	DC AC	UL KEMA KEMA	
L	L 2950 00 Chrome bezel available 	8.0 0.8-1.6 page 6	DC AC	UL KEMA KEMA	
L C 6.3	(L) 0195 BB 	8.0 0.8-3.0 page 6		UL KEMA	
L	L 2951 00 Chrome bezel 	8.0 0.8-1.6 page 6	DC AC	UL KEMA KEMA	
L H 4.8	(H) 0568 A(*) Deep lens profile  (VDE at T100)	8.0 0.8-3.5 page 6	DC	UL KEMA KEMA	 *Final suffix (X) - Long barrier *Final suffix (Y) - Short barrier *Final suffix (L) - For Wires
L H 4.8	(H) 0568 B(*) Shallow lens profile 	8.0 0.8-3.5 page 6	DC	UL KEMA KEMA	 *Final suffix (X) - Long barrier *Final suffix (Y) - Short barrier *Final suffix (L) - For Wires

Indicators

Indicator Lights Neon, LED and Filament Lamp

Colours and voltages:


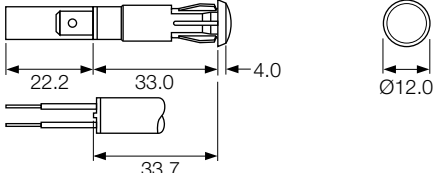

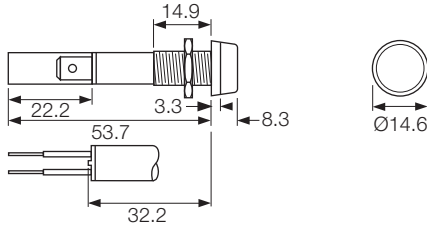

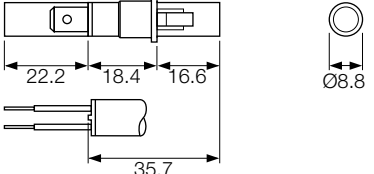

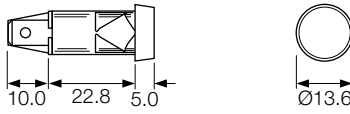

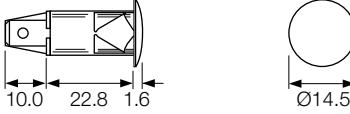

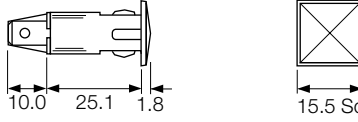
	Neon	Available with Red, Amber, Green or Clear lenses 100/130V (marked 110V), 200/250V (marked 230V)
	LED - DC	Red, Yellow, Green, Blue, White 2.0/2.2V Resistors for other voltages available.
	LED - AC	Red, Yellow, Green, Blue, White 110-230V ac operation.
	Filament lamp	Available with Red, Amber, Green, Clear or Blue lenses 6V, 12/14V, 24/28V.

- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 6.7 to 16.3mm diameter
- ▶ Red, amber, green, blue and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles

To create a catalogue number:

Refer to the 2 columns below (terminal and type), then state: Lens colour, voltage and whether neon, LED or filament lamp

TERM	TYPE	PANEL & °C	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
L	(L) 0569 AW 	9.0 0.8-2.5 Call sales	DC AC	FU, SE	19.0, 23.0, 8.5 max, 3.0, 12.0, Ø10.0
L	(C) 0273 00 	9.0	DC	FU, KEMA, SE	22.2, 32.8, 3.1, 33.5, Ø12.2
K 2.8		2.0 max	DC	KEMA	
H 4.8		page 6	AC	KEMA, SE	
C 6.3				KEMA	
L	(C) 0278 00 	9.0	DC	FU, KEMA, SE	22.3, 23.5, 3.5, 23.5, 12.0 Sq.
K 2.8		2.0 max	DC	KEMA	
H 4.8		page 6	AC	KEMA	
C 6.3					
L	(C) 0276 AA 	9.5	DC	FU, KEMA, SE	22.2, 33.0, 4.0, 33.7, Ø12.0
K 2.8		0.8-2.8	DC	KEMA	
H 4.8		page 6	AC	FU, KEMA, SE	
C 6.3				KEMA	
L	(C) 0275 00 	10.0	DC	FU, KEMA, SE	16.0, 22.2, 32.5, 3.0, 32.7, Ø13.3
K 2.8		12.0 max	DC	KEMA	
H 4.8		page 6	AC	KEMA, SE	
C 6.3				KEMA	
L	(C) 0275 00 Chrome bezel 	10.0	DC	FU, KEMA, SE	16.0, 22.2, 32.0, 32.5, 3.5, 3.0, 32.7, Ø13.3, Ø15.6
K 2.8		11.5 max	DC	KEMA	
H 4.8		page 6	AC	KEMA, SE	
C 6.3				KEMA	

TERM	TYPE	PANEL & °C	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
L K 2.8 H 4.8 C 6.3	(C) 0276 00 	10.0 2.8 max page 6	DC AC	KEMA CE	
L K 2.8 H 4.8 C 6.3	(C) 0277 00 Chrome bezel 	10.0 12.0 max page 6	DC AC	KEMA CE	
L K 2.8 H 4.8 C 6.3	(C) 0273 LL 	10.0 0.6-2.0 page 6	DC AC	KEMA CE	For sub-panel mounting, behind a fascia. 
L K 2.8 H 4.8 C 6.3	(C) 2820 00 	12.0 0.75-2.0 page 6	DC AC	KEMA CE	
L K 2.8 H 4.8 C 6.3	(C) 2821 00 	12.0 or 12.7 Ø12.0 = 0.8-2.5 Ø12.7 = 1.1-2.5 page 6	DC AC	KEMA CE	
L K 2.8 H 4.8 C 6.3	(C) 0586 00 	12.5 0.8-1.5 page 6	DC AC	KEMA CE	

Indicators

Indicator Lights Neon, LED and Filament Lamp







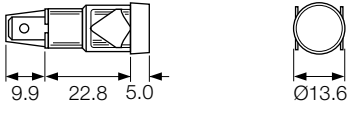















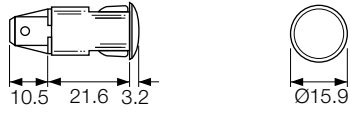















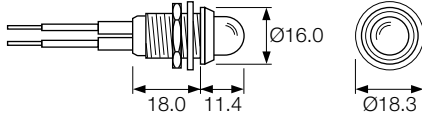















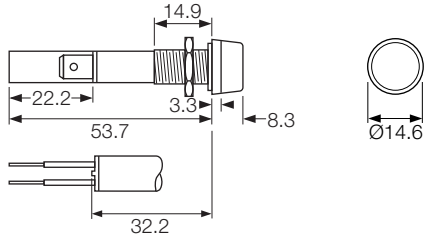















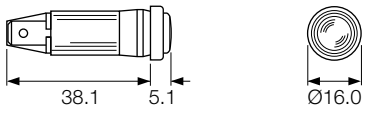














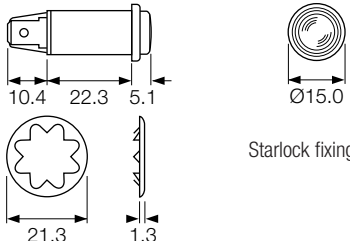









Colours and voltages:


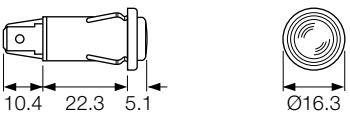

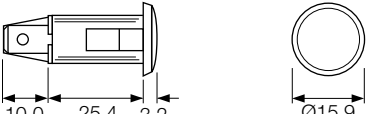

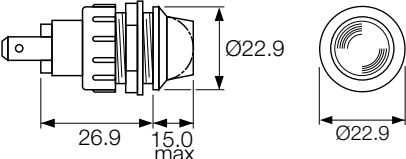
- ⊖  **Neon** Available with Red, Amber, Green or Clear lenses
100/130V (marked 110V), 200/250V (marked 230V)
- ⊖  **LED - DC** Red, Yellow, Green, Blue, White
2.0/2.2V Resistors for other voltages available.
- ⊖  **LED - AC** Red, Yellow, Green, Blue, White
110-230V ac operation.
- ⊖  **Filament lamp** Available with Red, Amber, Green, Clear or Blue lenses
6V, 12/14V, 24/28V.

- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 6.7 to 16.3mm diameter
- ▶ Red, amber, green and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles

To create a catalogue number:

Refer to the 2 columns below (terminal and type), then state: Lens colour, voltage and whether neon, LED or filament lamp

TERM	TYPE	PANEL & °C	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
L		 12.7		  	
K 2.8		 0.75-2.0			
H 4.8					
C 6.3					
L		 12.7		  	
K 2.8		 0.8-1.5			
H 4.8					
C 6.3					
L		 12.7		  	
		 9.5			
					
					
L		 12.7		  	
K 2.8		 12.0max			
H 4.8					
C 6.3					
L		 12.7		  	
K 2.8		 1.14max			
H 4.8					
C 6.3					
L		 12.7		 	
C 6.3		 19.0max			
					
					

TERM	TYPE	PANEL & °C	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
L C 6.3	(C) 0180BB Chrome bezel 	13.5 0.9-1.14 page 6	DC	KEMA KEUR	
L K 2.8 H 4.8 C 6.3	(C) 0579 00 	14.0 2.5max page 6	DC AC	KEMA KEUR	
C 6.3	(C) 1092 	19.0 4.0max page 6	AC	KEMA KEUR	

Indicator Lights Neon, LED and Filament Lamp












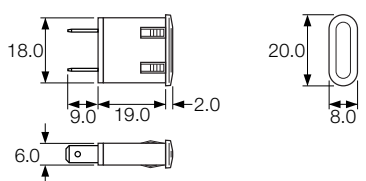









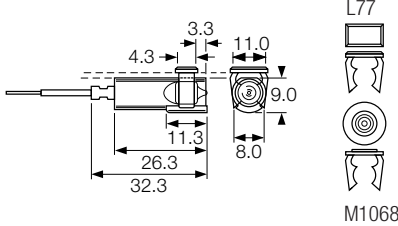







Colours and voltages:

-  **Neon** Available with Red, Amber, Green or Clear lenses
100/130V (marked 110V), 200/250V (marked 230V)
-  **LED - DC** Red, Yellow, Green, Blue, White
2.0/2.2V Resistors for other voltages available.
-  **LED - AC** Red, Yellow, Green, Blue, White
110-230V ac operation.
-  **Filament lamp** Available with Red, Amber, Green, Clear or Blue lenses
6V, 12/14V, 24/28V.

- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 6.7 to 16.3mm diameter
- ▶ Red, amber, green and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles

To create a catalogue number:

Refer to the 2 columns below (terminal and type), then state: Lens colour, voltage and whether neon, LED or filament lamp

TERM	TYPE	PANEL & °C	ILLUM'N OPTIONS	APPROVAL	DIMENSIONS (mm)
H 4.8 	H 0581 AY 	 18.2/18.3 X 6.2/6.3*  2.0-3.5  page 6	 	   	
L 	L 0234 00 	 9.27/9.50 X 4.75*  0.71-1.62  page 6		  	
L 	L 0233 00 	  page 6			 Neon tube, resistor and flexible lead assembly, protected by "shrunk on" transparent sleeving.