


Standard module with 16 ATO fuses

PART NUMBER: 175261

CHARACTERISTICS

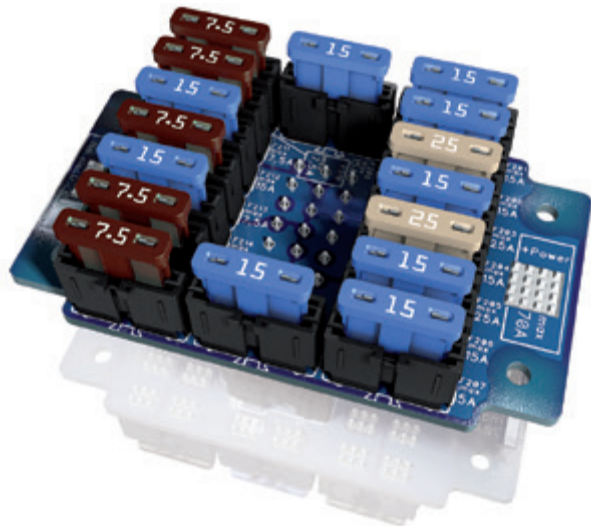

- Suitable for 12 V and 24 V applications
- Power supply via M5 power elements up to max. 80 A
- 16 fuse sockets for ATO fuses up to max. 25 A
- Rear connector 21 pin, 3 rows – JPT and MCP compatible
- High thermal load
- Shock and vibration resistant
- Also available with populated board (relays, fuses resp. automatic circuit breakers)

APPLICATIONS

- Power distribution within the automotive segment, such as alternators, control and indication devices, radio, accessories etc.
- Applicable individually or modular

TECHNICAL DATA


Operational temperature	-40° C to +85° C
Max. power supply	Max. 80 A at 65° C ambient temperature Max. 70 A at 80° C ambient temperature
Output	Connector 3 row, 21 pin, JPT/MCP compatible
Input	Power element socket M5, max. torque: 2.2 Nm (other designs on request)
Recommended cable cross-section for connector*	Current $I \leq 15$ A: 7.5 A per mm ² Current $I > 15$ A: 5 A per mm ²

*Note derating of connector


Standard module with 16 ATO fuses

PART NUMBER: 175261

DIMENSIONS

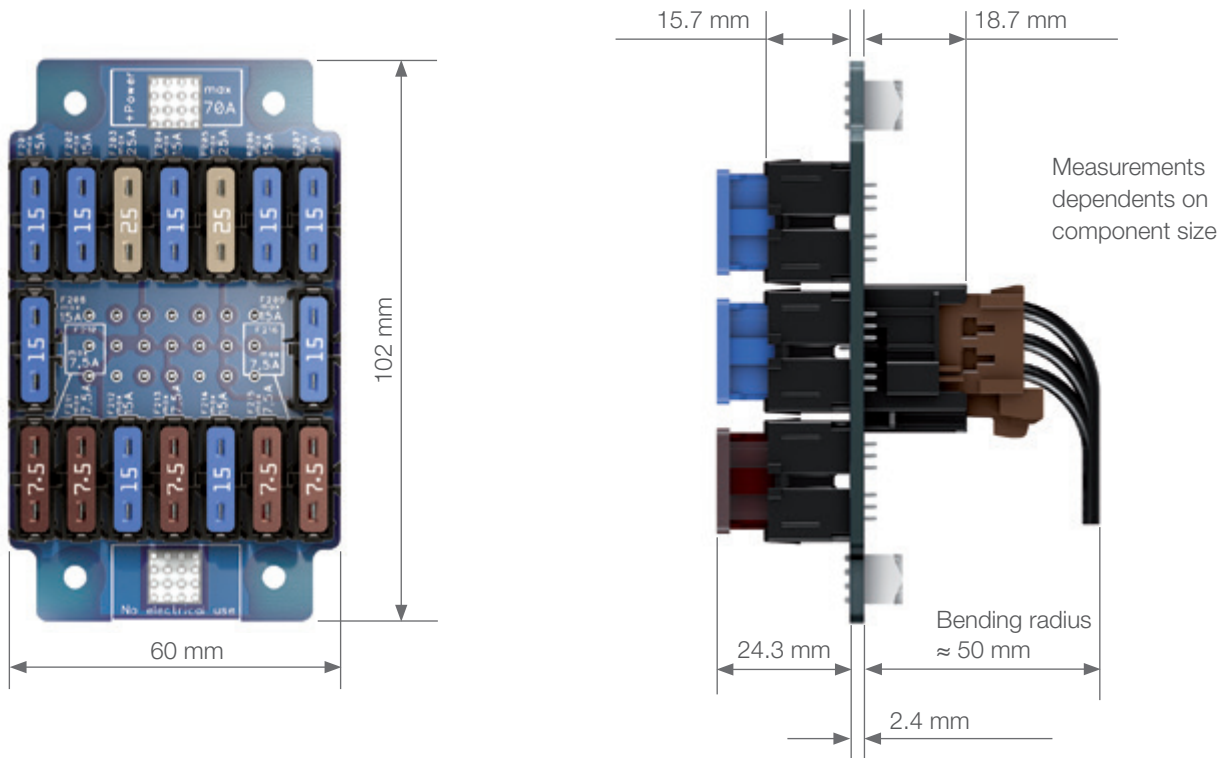

ELECTRIC CIRCUIT DIAGRAM

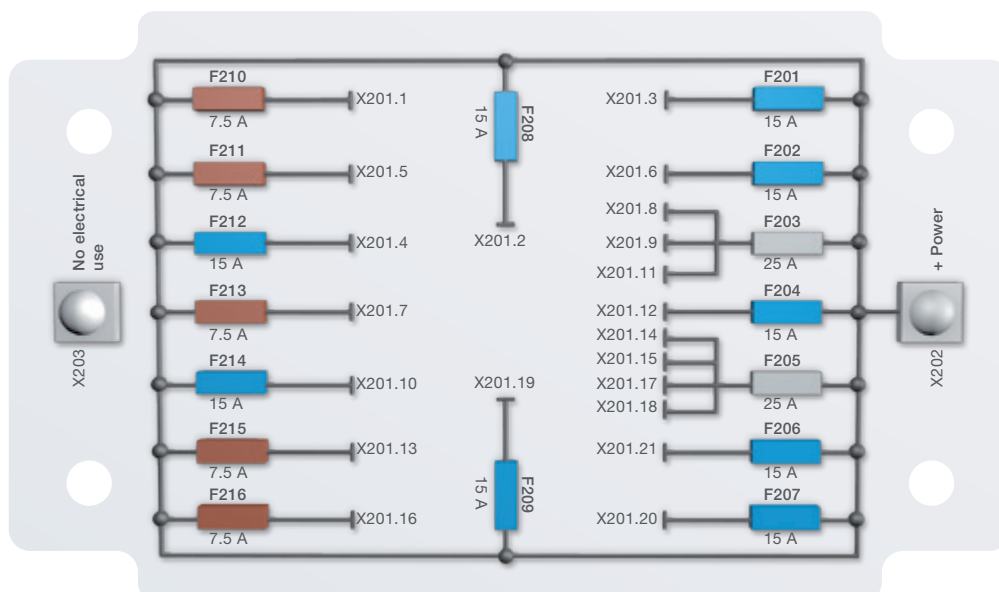

CAUTION: Note maximum supply current