



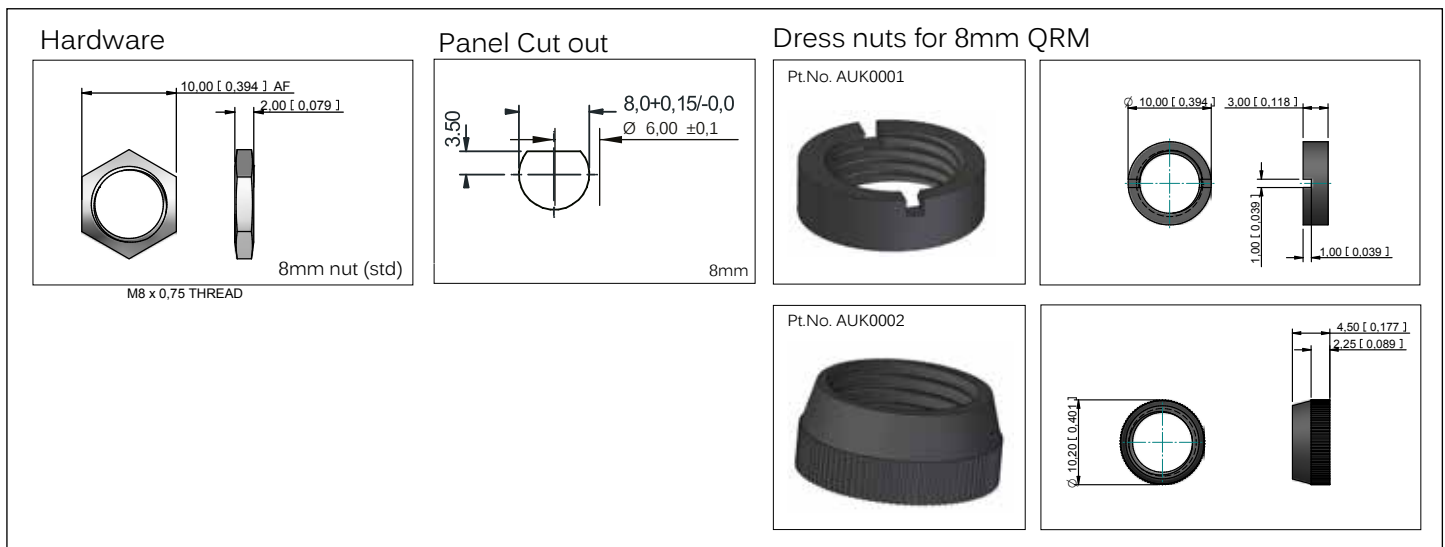

# QRM-NV SERIES

## NVIS Compatible Rear Panel Mounting LED Indicator

### Technical Drawings

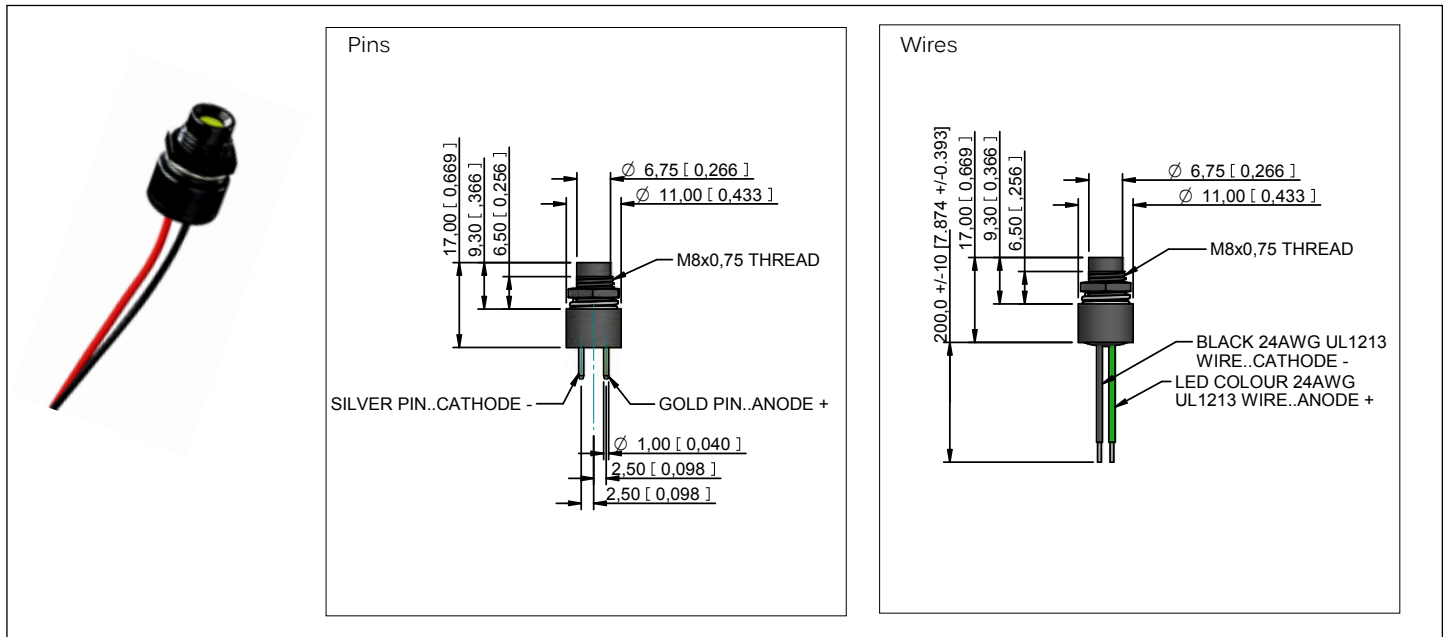

# QRM-NV SERIES

## NVIS Compatible Rear Panel Mounting LED Indicator

### Overview

#### STANDARD OPTIONS

The QRM Series is available with a range of standard options, to specify your LED, simply choose one option from each column. An example is shown below.

QRM-NV	8	5	B	XX	NV-GRA	24A	E
SERIES	MOUNTING HOLE	TERMINALS	BEZEL FINISH	TYPE OF ILLUMINATION	LED COLOR	VOLTAGE	SEALING
QRM-NV	8 = Ø8mm	4 = Ridgid Pins 5 = Wires	B = Black Chrome	XX = Fixed light	NV-GRA = NVIS Green A NV-GRB = NVIS Green B NV-YWA = NVIS Yellow A NV-YWB = NVIS Yellow B NV-RD = NVIS Red NV-WH = NVIS White	02 = 2VDC (no resistor) 06 = 6VDC 12 = 12VDC 12A = 12VAC/DC 24 = 24VDC 24A = 24VAC/DC 28 = 28VDC 28A = 28VAC/DC	E = IP67 (Standard)

#### Example QRM-NV85BXXNV-GRA24AE

Ø8mm mounting hole with wire terminations,  
black chrome finish, fixed light  
NVIS Green A 24V AC,  
panel sealed to IP67



- Standard wire length is 200mm, 22AWG, red wire denotes Anode (+), black wire denotes Cathode (-) for other wire lengths consult APEM
- For LEDs with alternate voltages consult APEM
- Take care when soldering (recommended solder temperature 270°C - 2 sec)
- Maximum panel thickness 3.5mm
- For resistorless versions (02) please pay attention to the forward voltage
- For multi-voltage options please consult Apem
- Suitable for the toughest enviroment and compliant to MIL standard specification



ERMEC, S.L.  
(España)

Tel.: (+34) 902 450 160  
Fax: (+34) 902 433 088

[info@ermec.com](mailto:info@ermec.com)  
[www.ermec.com](http://www.ermec.com)

Portugal  
[portugal@ermec.com](mailto:portugal@ermec.com)