



APEM

NEW PRODUCT - COMING SOON!



ERMEC
www.ermec.com

ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
08918 Badalona
(España)

Tel.: (+34) 902 450 160
Fax: (+34) 902 433 088
info@ermec.com
www.ermec.com

ERMEC, S.L. MADRID
c/Mejorada, 17,1ªPlá.Of.D4
28850 Torrejón de Ardoz
(España)

PORTUGAL
portugal@ermec.com

BILBAO
bilbao@ermec.com

ULTRA NAVIMEC SERIES




mec
switches

KEY FEATURES

- PCB mounted navigation solution
- Standard sealing - custom interface
- Front panel sealing up to IP67
- Low below panel height
- Flexible illumination - chip LEDs on PCB
- Based on Ultramec 6C switch series


OPTION SELECTION

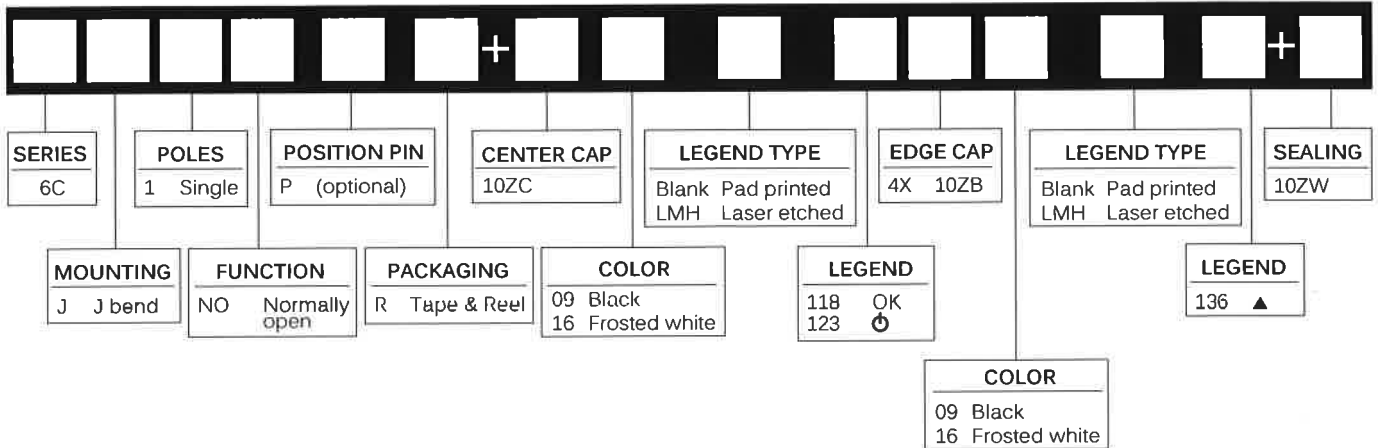


GENERAL SPECIFICATIONS

Front panel sealing	-	IP67 to IEC 60529
Mechanical lifecycle	-	3,000,000 activations
Operating temperature	-	-40°C to +85°C (-40°F to 185°F)
Actuation force	-	4.2N ± 1.0N (before soldering) 3.7N ± 0.7N (after soldering)
Contact rating	-	50mA 24VDC
Material	-	sealing: silicone illuminated cap: polycarbonate non-illuminated cap: ABS
Panel cut-out	-	Ø 22.4 mm

SWITCH SPACING

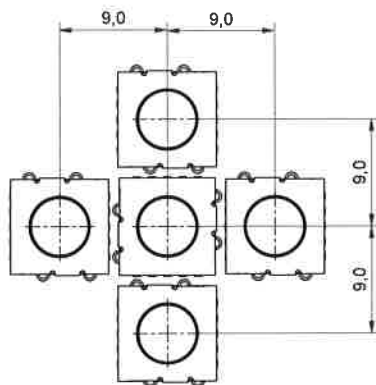

GENERAL DIMENSIONS

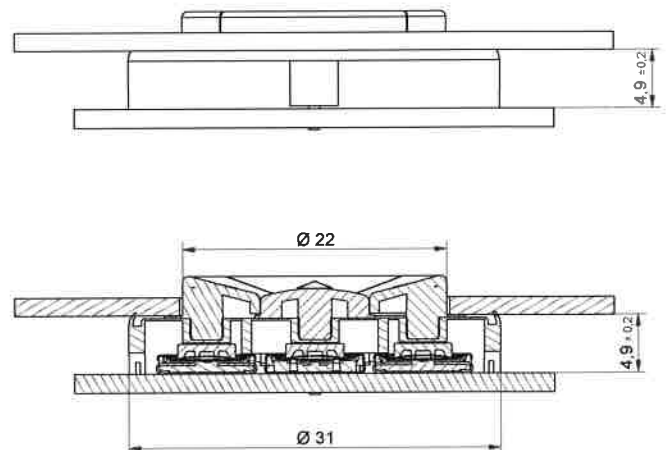

NOTE: Dimensions are in mm.

Note: The company reserves the right to change specifications without notice.