


# Snap-fit

## Features


- > Easily mountable and removable as no tools or screws required
- > Small size
- > Various sensitivity ranges available
- > Customized types available



		MS-320
Contact form		A
Contact rating max.	W / VA	10
Switching current max.	A	0.7
Switching voltage max.	VDC	180
	VAC	130
Pull in range available	AT	10-25
Operating Temperature	°C	-20 to +85
UL / CSA / RoHS		• / • / •
<b>Housing material</b>		
		PA66-GF
<b>Cable type</b>		
		AWG 22

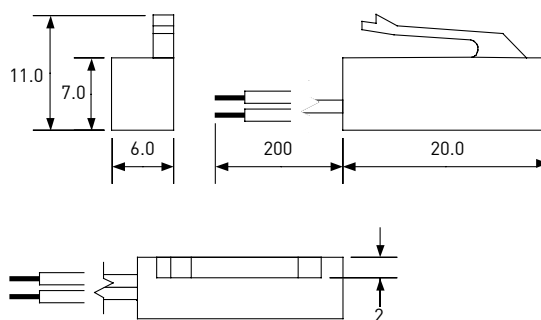

		MS-390-3	MS-390-4	MS-390-5
Contact form		A	C	A
Contact rating max.	W / VA	10	5	10
Switching current max.	A	1	0.25	0.3
Carry current max.	A	1.2	1.5	1.4
Switching voltage max.	VDC	200	175	200
	VAC	140	120	260
Breakdown voltage min.	VDC	240	200	400
Operating Temperature	°C	-20 to +85		
UL / CSA / RoHS		-- / -- / •		
<b>Housing material</b>				
PC				
<b>Cable type</b>				
		UL 1007, AWG 22	UL 1061, AWG 24	UL 1007, AWG 22

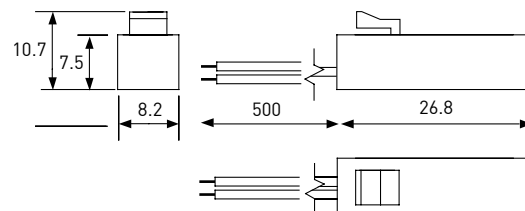

Matching actuators on page 32/33.



ERMEC, S.L. BARCELONA  
C/ Francesc Teixidó, 22  
08918 Badalona  
(España)

Tel.: (+34) 902 450 160  
Fax: (+34) 902 433 088  
[info@ermec.com](mailto:info@ermec.com)  
[www.ermec.com](http://www.ermec.com)

ERMEC, S.L. MADRID  
c/Mejorada, 17,1ªPl. Of.D4  
28850 Torrejón de Ardoz  
(España)

PORTUGAL  
[portugal@ermec.com](mailto:portugal@ermec.com)  
BILBAO  
[bilbao@ermec.com](mailto:bilbao@ermec.com)

AT ranges and characteristics stated for unmodified Reed Switches.  
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.