

"Technology Leadership"


- Flat, flexible cables (FFC) — board-to-board connectors
- Lengths of 3 meters/10 feet or greater
- Many connector options — latch, plain or detent
- EMI/RFI shielding regardless of FFC length

"The Safe Choice"

- Reliable connection for dynamic flex applications
- Millions of flex cycles with minimum bend radius
- Multiple configurations for custom design
- REACH, RoHS and UL rated



Long Life, Shielded FFC Jumpers for Dynamic Flex Applications

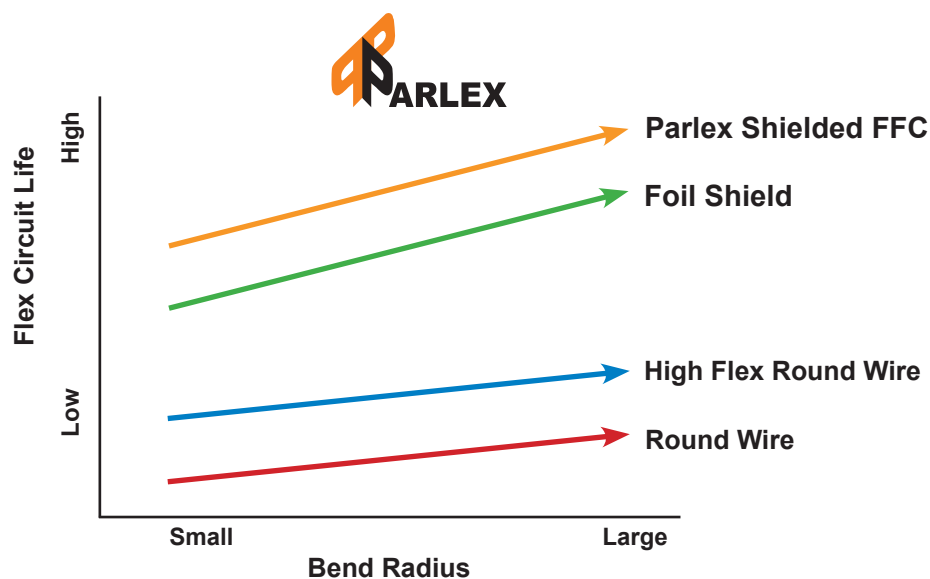

For more information, contact us at sales@johnsonelectric.com
www.johnsonelectric.com