

Switch guards

For switch series 3500 - 600H - 6000 - 13000



DISTINCTIVE FEATURES

- Prevent accidental lever operation
- Holes for wiring a seal
- Many options available
- Models for 2 or 3 positions switches



ENVIRONMENTAL SPECIFICATIONS

- Salt spray test : 96 hours (IEC 68-2-11)
- Operating temperature : -40 °C to +85 °C (-40 °F to +185 °F)



MATERIALS

- Support plate : stainless steel
- Guard : stainless steel

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.



The company reserves the right to change specifications without notice.

Switch guards

For switch series 3500 - 600H - 6000 - 13000

BUILD YOUR PART NUMBER



SERIES

BUSHING SHAPES

SWITCH GUARD SHAPES

For standard products

- A** Flatted, left side
- B** Flatted, right side
- C** Keyway, left
- D** Keyway, right

For other products

- E** Flatted, up
- F** Flatted, down
- G** Keyway, up
- H** Keyway, down

- 1** Locks in center position
- 2** Prevents down position
- 3** Prevents up position
- 4** Locks in down position
- 5** Locks in up position



OPTIONS

SWITCH GUARDS COLORS

- 1** Blue
- 2** Black
- 3** Green
- 4** Grey
- 5** Yellow
- 6** Red
- 7/1** White
- 9** Orange
- 0** Striped (see right)


COLOR OF STRIPES

- A** Red/ Black
- B** Yellow/ Black
- C** Red/ White
- D** White/ Black

See next pages for drawing.

ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers and options in the same order as in above chart.

 **Notice** : please note that not all combinations of above numbers are available. Refer to the following pages for further information.

Switch guards

For switch series 3500 - 600H - 6000 - 13000

SERIES 90 - WITH STANDARD OR FLATTED BUSHING

Lever locked in center position


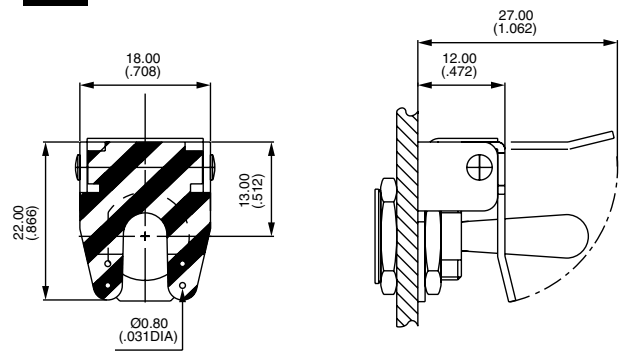


Plate features holes for wiring a seal.


BUSHING SHAPES




FOR STANDARD PRODUCTS




A



B




C




D


FOR OTHER PRODUCTS




E



F



G




H


SWITCH GUARD SHAPES




- 1 Locks in center position
- 2 Prevents down position
- 3 Prevents up position
- 4 Locks in down position
- 5 Locks in up position




1




2



3



4



5

Switch guards

For switch series 3500 - 600H - 6000 - 13000

SWITCH GUARD COLORS




- 1 Blue
- 2 Black
- 3 Green
- 4 Grey
- 5 Yellow
- 6 Red
- 7/1 White
- 9 Orange
- 0 Striped (see below)

COLORS OF STRIPES



① Stripes / ② Stripes

- A Red / Black
- B Yellow / Black
- C Red / White
- D White / Black



SERIES 90AX2328 FOR PUSHBUTTON SERIES 13000 WITH Ø 11.9 (15/32) BUSHING

- Spring-loaded cover returning automatically in lower position. The user has to keep the cover raised while actuating the switch.



Black with white stripe

90AX2328-27

Red with white stripe

90AX2328-67

