


FUSIBILI CILINDRICI

Cylindrical fuses | *Fusibles cylindriques*



FUSIBILI 5x20 CON CODICE COLORE SF

5x20 SF fuses with code colors | *Fusibles 5x20 avec code couleur SF*

Dimensioni	Dimensions	Dimensions
5x20 mm	5x20 mm	5x20 mm
Caratteristica F= rapidi	Characteristic F= fast	Caractéristique F= rapides
Tensione 250 V	Voltage 250 V	Tension 250 V
Capacità di rottura L 35 A	Breaking capacity L 35 A	Pouvoir de coupure L 35 A
Corpo Vetro	Body Glass	Corps Verre
Cod. omologazione Bussmann S500 - OMEGA	Approval code Bussmann S500 - OMEGA	Code d'homologation Bussmann S500 - OMEGA
Norme riferimento EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661	Standards EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661	Normes EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661



pag. 24




TEMPI DI FUSIONE | Time current | Temps de fusion

Corrente nominale In Rated current <i>Courant nominal</i>	Corrente di prova Test current <i>Courant d'essai</i>				
	1,5xIn	2,1xIn	2,75xIn	4xIn	10xIn
32 mA - 125 mA	min 60 min	max 30 min	-	-	-
160 mA - 6,3 A	min 60 min	max 30 min	50 ms - 2 s	10 ms - 300 ms	20 ms
8 A - 10 A	min 30 min	max 30 min	50 ms - 2 s	10 ms - 400 ms	40 ms

Corrente nom.	Omologazioni	Codice	Codice	Caduta tensione mV	I ² t	Cap. rottura A
Rated current	Approvals	Code	Code	Voltage drop mV	I ² t	Breaking capacity
<i>Courant nominal</i>	<i>Homologations</i>	<i>Code</i>	<i>Code</i>	<i>Chute de tension mV</i>	<i>I²t</i>	<i>Pouvoir de coupure A</i>
50 mA		SF520050	SF521050	2400	0,00020	35
63 mA		SF520063	SF521063	2000	0,00057	35
80 mA		SF520080	SF521080	1200	0,0012	35
100 mA		SF520110	SF521110	1100	0,003	35
125 mA		SF520112	SF521112	1000	0,005	35
160 mA		SF520116	SF521116	2000	0,008	35
200 mA		SF520120	SF521120	1700	0,016	35
250 mA		SF520125	SF521125	1400	0,28	35
315 mA		SF520131	SF521131	1300	0,58	35
400 mA		SF520140	SF521140	1100	0,18	35
500 mA		SF520150	SF521150	220	0,18	35
630 mA		SF520163	SF521163	220	0,35	35
800 mA		SF520180	SF521180	190	0,67	35
1 A		SF520210	SF521210	200	0,60	35
1,25 A		SF520212	SF521212	200	0,84	35
1,6 A		SF520216	SF521216	190	1,6	35
2 A		SF520220	SF521220	150	4,2	35
2,5 A		SF520225	SF521225	150	6,1	35
3,15 A		SF520231	SF521231	130	13,0	35
4 A		SF520240	SF521240	130	22,0	40
5 A		SF520250	SF521250	120	42,0	50
6,3 A		SF520263	SF521263	120	69,0	63
8 A		SF520280	SF521280	120	-	80
10 A		SF520310	SF521310	120	-	100



1000 pz
1000 pcs
1000 pces



FUSIBILI 5x20 SF

5x20 SF fuses | *Fusibles 5x20 SF*

Dimensioni	Dimensions	Dimensions
5x20 mm	5x20 mm	5x20 mm
Caratteristica F= rapidi	Characteristic F= fast	Caractéristique F= rapides
Tensione 250 V	Voltage 250 V	Tension 250 V
Capacità di rottura L 35 A	Breaking capacity L 35 A	Pouvoir de coupure L 35 A
Corpo Vetro	Body Glass	Corps Verre
Cod. omologazione Bussmann S500 - OMEGA	Approval code Bussmann S500 - OMEGA	Code d'homologation Bussmann S500 - OMEGA
Norme riferimento EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661	Standards EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661	Normes EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661



pag. 24



TEMPI DI FUSIONE | Time current | Temps de fusion

Corrente nominale In Rated current <i>Courant nominal</i>	Corrente di prova Test current <i>Courant d'essai</i>				
	1,5xIn	2,1xIn	2,75xIn	4xIn	10xIn
32 mA - 125 mA	min 60 min	max 30 min	-	-	-
160 mA - 6,3 A	min 60 min	max 30 min	50 ms - 2 s	10 ms - 300 ms	20 ms
8 A - 10 A	min 30 min	max 30 min	50 ms - 2 s	10 ms - 400 ms	40 ms

Corrente nom.	Omologazioni	Codice	Codice	Caduta tensione mV	I ² t	Cap. rottura A
Rated current	Approvals	Code	Code	Voltage drop mV	I ² t	Breaking capacity
<i>Courant nominal</i>	<i>Homologations</i>	<i>Code</i>	<i>Code</i>	<i>Chute de tension mV</i>	<i>I²t</i>	<i>Pouvoir de coupure A</i>
50 mA		SF522050	SF523050	2400	0,00020	35
63 mA		SF522063	SF523063	2000	0,00057	35
80 mA		SF522080	SF523080	1200	0,0012	35
100 mA		SF522110	SF523110	1100	0,003	35
125 mA		SF522112	SF523112	1000	0,005	35
160 mA		SF522116	SF523116	2000	0,008	35
200 mA		SF522120	SF523120	1700	0,016	35
250 mA		SF522125	SF523125	1400	0,28	35
315 mA		SF522131	SF523131	1300	0,58	35
400 mA		SF522140	SF523140	1100	0,18	35
500 mA		SF522150	SF523150	220	0,18	35
630 mA		SF522163	SF523163	220	0,35	35
800 mA		SF522180	SF523180	190	0,67	35
1 A		SF522210	SF523210	200	0,60	35
1,25 A		SF522212	SF523212	200	0,84	35
1,6 A		SF522216	SF523216	190	1,6	35
2 A		SF522220	SF523220	150	4,2	35
2,5 A		SF522225	SF523225	150	6,1	35
3,15 A		SF522231	SF523231	130	13,0	35
4 A		SF522240	SF523240	130	22,0	40
5 A		SF522250	SF523250	120	42,0	50
6,3 A		SF522263	SF523263	120	69,0	63
8 A		SF522280	SF523280	120	-	80
10 A		SF522310	SF523310	120	-	100




1000 pz
1000 pcs
1000 pces



FUSIBILI CILINDRICI


Cylindrical fuses | Fusibles cylindriques



FUSIBILI 5x20 CON CODICE COLORE ST

5x20 ST fuses with code colors | Fusibles 5x20 avec code couleur ST

Dimensioni	Dimensions	Dimensions
5x20 mm	5x20 mm	5x20 mm
Caratteristica	Characteristic	Caractéristique
T = ritardati	T = time delay	T = temporisés
Tensione	Voltage	Tension
250 V	250 V	250 V
Capacità di rottura	Breaking capacity	Pouvoir de coupure
L 35 A	L 35 A	L 35 A
Corpo	Body	Corps
Vetro	Glass	Verre
Cod. omologazione	Approval code	Code d'homologation
Bussmann S506 - OMEGA	Bussmann S506 - OMEGA	Bussmann S506 - OMEGA
Norme riferimento	Standards	Normes
EN60127.2.3 / VDE 0820 / CEI 32.6.2 / BS 4265 / SEMKO 104 / DIN 41661	EN60127.2.3 / VDE 0820 / CEI 32.6.2 / BS 4265 / SEMKO 104 / DIN 41661	EN60127.2.3 / VDE 0820 / CEI 32.6.2 / BS 4265 / SEMKO 104 / DIN 41661



FUSIBILI 5x20 ST

5x20 ST fuses | Fusibles 5x20 ST


Dimensioni	Dimensions	Dimensions
5x20 mm	5x20 mm	5x20 mm
Caratteristica	Characteristic	Caractéristique
T = ritardati	T = time delay	T = temporisés
Tensione	Voltage	Tension
250 V	250 V	250 V
Capacità di rottura	Breaking capacity	Pouvoir de coupure
L 35 A	L 35 A	L 35 A
Corpo	Body	Corps
Vetro	Glass	Verre
Cod. omologazione	Approval code	Code d'homologation
Bussmann S506 - OMEGA	Bussmann S506 - OMEGA	Bussmann S506 - OMEGA
Norme riferimento	Standards	Normes
EN60127.2.3 / VDE 0820 / CEI 32.6.2 / BS 4265 / SEMKO 104 / DIN 41661	EN60127.2.3 / VDE 0820 / CEI 32.6.2 / BS 4265 / SEMKO 104 / DIN 41661	EN60127.2.3 / VDE 0820 / CEI 32.6.2 / BS 4265 / SEMKO 104 / DIN 41661



TEMPI DI FUSIONE | Time current | Temps de fusion

Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai			
	2,1xIn	2,75xIn	4xIn	10xIn
32 mA - 100 mA	max 2 min	min max 200 ms - 10 s	min max 40 ms - 3 s	min max 10 ms - 300 ms
125 mA - 6,3 A	2 min	600 ms - 10 s	150 ms - 3 s	20 ms - 300 ms
8 A - 15 A	2 min	600 ms - 10 s	150 ms - 3 s	20 ms - 300 ms


Corrente nom.	Omologazioni	Codice	Codice	Caduta tensione mV	I ² t	Cap. rottura A
Rated current	Approvals	Code	Code	Voltage drop mV	I ² t	Breaking capacity
Courant nominal	Homologations	Code	Code	Chute de tension mV	I ² t	Pouvoir de coupure A
32 mA		ST520032	ST521032	1050	0,0051	35
40 mA		ST520040	ST521040	920	0,0072	35
50 mA		ST520050	ST521050	800	0,0095	35
63 mA		ST520063	ST521063	760	0,021	35
80 mA		ST520080	ST521080	580	0,038	35
100 mA		ST520110	ST521110	490	0,045	35
125 mA		ST520112	ST521112	390	0,063	35
160 mA		ST520116	ST521116	320	0,093	35
200 mA		ST520120	ST521120	340	0,114	35
250 mA		ST520125	ST521125	270	0,265	35
315 mA		ST520131	ST521131	250	0,621	35
400 mA		ST520140	ST521140	210	0,872	35
500 mA		ST520150	ST521150	140	0,827	35
630 mA		ST520163	ST521163	150	1,33	35
800 mA		ST520180	ST521180	75	2,78	35
1 A		ST520210	ST521210	87,5	6,45	35
1,25 A		ST520212	ST521212	86	10,05	35
1,6 A		ST520216	ST521216	82	21,7	35
2 A		ST520220	ST521220	77	31,6	35
2,5 A		ST520225	ST521225	72,5	59,4	35
3,15 A		ST520231	ST521231	68,5	96,4	35
4 A		ST520240	ST521240	67	71,8	40
5 A		ST520250	ST521250	60,5	142,5	50
6,3 A		ST520263	ST521263	54	237,6	63
8 A		ST520280	ST521280	55	255,8	80
10 A		ST520310	ST521310	54	450,0	100
12,5 A		ST520312	ST521312	45	1019,5	125
*15 A		ST520315	ST521315	65,5	1091,7	125



TEMPI DI FUSIONE | Time current | Temps de fusion


Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai			
	2,1xIn	2,75xIn	4xIn	10xIn
32 mA - 100 mA	max 2 min	min max 200 ms - 10 s	min max 40 ms - 3 s	min max 10 ms - 300 ms
125 mA - 6,3 A	2 min	600 ms - 10 s	150 ms - 3 s	20 ms - 300 ms
8 A - 15 A	2 min	600 ms - 10 s	150 ms - 3 s	20 ms - 300 ms

Corrente nom.	Omologazioni	Codice	Codice	Caduta tensione mV	I ² t	Cap. rottura A
Rated current	Approvals	Code	Code	Voltage drop mV	I ² t	Breaking capacity
Courant nominal	Homologations	Code	Code	Chute de tension mV	I ² t	Pouvoir de coupure A
32 mA		ST522032	ST523032	1050	0,0051	35
40 mA		ST522040	ST523040	920	0,0072	35
50 mA		ST522050	ST523050	800	0,0095	35
63 mA		ST522063	ST523063	760	0,021	35
80 mA		ST522080	ST523080	580	0,038	35
100 mA		ST522110	ST523110	490	0,045	35
125 mA		ST522112	ST523112	390	0,063	35
160 mA		ST522116	ST523116	320	0,093	35
200 mA		ST522120	ST523120	340	0,114	35
250 mA		ST522125	ST523125	270	0,265	35
315 mA		ST522131	ST523131	250	0,621	35
400 mA		ST522140	ST523140	210	0,872	35
500 mA		ST522150	ST523150	140	0,827	35
630 mA		ST522163	ST523163	150	1,33	35
800 mA		ST522180	ST523180	75	2,78	35
1 A		ST522210	ST523210	87,5	6,45	35
1,25 A		ST522212	ST523212	86	10,05	35
1,6 A		ST522216	ST523216	82	21,7	35
2 A		ST522220	ST523220	77	31,6	35
2,5 A		ST522225	ST523225	72,5	59,4	35
3,15 A		ST522231	ST523231	68,5	96,4	35
4 A		ST522240	ST523240	67	71,8	40
5 A		ST522250	ST523250	60,5	142,5	50
6,3 A		ST522263	ST523263	54	237,6	63
8 A		ST522280	ST523280	55	255,8	80
10 A		ST522310	ST523310	54	450,0	100
12,5 A		ST522312	ST523312	45	1019,5	125
*15 A		ST522315	ST523315	65,5	1091,7	125



FUSIBILI CILINDRICI

Cylindrical fuses | *Fusibles cylindriques*



FUSIBILI 5x20 CF

5x20 CF fuses | *Fusibles 5x20 CF*

Dimensioni
5x20 mm

Caratteristica
F= rapidi

Tensione
250 V

Capacità di rottura
L 35 A

Corpo
Vetro

Marchio di fabbrica
OMEGA

Norme riferimento
EN60127.2.1 / VDE 0820 /
CEI 32.6.2
BS 4265 / SEMKO 104 /
DIN 41661

Dimensions
5x20 mm

Characteristic
F= fast

Voltage
250 V

Breaking capacity
L 35 A

Body
Glass

Trade mark
OMEGA

Standards
EN60127.2.1 / VDE 0820 /
CEI 32.6.2
BS 4265 / SEMKO 104 /
DIN 41661

Dimensions
5x20 mm

Caractéristique
F= rapides

Tension
250 V

Pouvoir de coupure
L 35 A

Corps
Verre

Marque de fabrique
OMEGA

Normes
EN60127.2.1 / VDE 0820 /
CEI 32.6.2
BS 4265 / SEMKO 104 /
DIN 41661



pag. 26

TEMPI DI FUSIONE | Time current | *Temps de fusion*

Corrente nominale In Rated current <i>Courant nominal</i>	Corrente di prova Test current <i>Courant d'essai</i>			
	1,5xIn	2,1xIn	4xIn	10xIn
50 mA - 25 A	> 1 h	< 30 min	< 300 ms	< 20 ms

Corrente nominale Rated current <i>Courant nominal</i>	Codice Code <i>Code</i>	Codice Code <i>Code</i>
50 mA	CF520050	CF521050
63 mA	CF520063	CF521063
80 mA	CF520080	CF521080
100 mA	CF520110	CF521110
125 mA	CF520112	CF521112
160 mA	CF520116	CF521116
200 mA	CF520120	CF521120
250 mA	CF520125	CF521125
315 mA	CF520131	CF521131
400 mA	CF520140	CF521140
500 mA	CF520150	CF521150
630 mA	CF520163	CF521163
800 mA	CF520180	CF521180
1 A	CF520210	CF521210
1,25 A	CF520212	CF521212
1,6 A	CF520216	CF521216
2 A	CF520220	CF521220
2,5 A	CF520225	CF521225
3,15 A	CF520231	CF521231
4 A	CF520240	CF521240
5 A	CF520250	CF521250
6,3 A	CF520263	CF521263
8 A	CF520280	CF521280
10 A	CF520310	CF521310
12,5 A	CF520312	CF521312
16 A	CF520316	CF521316
•20 A	CF520320	CF521320
•25 A	CF520325	CF521325


• valori fuori norma
rating not within the standards
valeurs non standards



10/100 pz
10/100 pcs
10/100 pces



pronta
in stock
en stock



FUSIBILI 5x20 CT

5x20 CT fuses | *Fusibles 5x20 CT*

Dimensioni
5x20 mm

Caratteristica
T= ritardati

Tensione
250 V

Capacità di rottura
L 35 A

Corpo
Vetro

Marchio di fabbrica
OMEGA

Norme riferimento
EN60127.2.3 / VDE 0820 /
CEI 32.6.2
BS 4265 / SEMKO 104 /
DIN 41661

Dimensions
5x20 mm

Characteristic
T= time delay

Voltage
250 V

Breaking capacity
L 35 A

Body
Glass

Trade mark
OMEGA

Standards
EN60127.2.3 / VDE 0820 /
CEI 32.6.2
BS 4265 / SEMKO 104 /
DIN 41661

Dimensions
5x20 mm

Caractéristique
T= temporisés

Tension
250 V

Pouvoir de coupure
L 35 A

Corps
Verre

Marque de fabrique
OMEGA

Normes
EN60127.2.3 / VDE 0820 /
CEI 32.6.2
BS 4265 / SEMKO 104 /
DIN 41661



pag. 26

TEMPI DI FUSIONE | Time current | *Temps de fusion*

Corrente nominale In Rated current <i>Courant nominal</i>	Corrente di prova Test current <i>Courant d'essai</i>				
	1,5xIn	2,1xIn	2,75xIn	4xIn	10xIn
50 mA - 25 A	> 1 h	< 5 min	600 ms - 10 s	150 ms - 3 s	20 ms - 300 ms

Corrente nominale Rated current <i>Courant nominal</i>	Codice Code <i>Code</i>	Codice Code <i>Code</i>
8 A	CT520280	CT521280
10 A	CT520310	CT521310
12,5 A	CT520312	CT521312
16 A	CT520316	CT521316
•20 A	CT520320	CT521320
•25 A	CT520325	CT521325

• valori fuori norma
rating not within the standards
valeurs non standards




10/100 pz
10/100 pcs
10/100 pces



pronta
in stock
en stock

FUSIBILI CILINDRICI

Cylindrical fuses | Fusibles cylindriques



FUSIBILI 5x20 UF

5x20 UF fuses | Fusibles 5x20 UF

Dimensioni	Dimensions	Dimensions
5x20 mm	5x20 mm	5x20 mm
Caratteristica F= rapidi	Characteristic F= fast	Caractéristique F= rapides
Tensione 250 V	Voltage 250 V	Tension 250 V
Capacità di rottura L 35 A - 63 mA ÷ 1 A L 100 A - 1,25 A ÷ 3 A	Breaking capacity L 35 A - 63 mA ÷ 1 A L 100 A - 1,25 A ÷ 3 A	Pouvoir de coupure L 35 A - 63 mA ÷ 1 A L 100 A - 1,25 A ÷ 3 A
Corpo Vetro	Body Glass	Corps Verre
Cod. omologazione Bussmann GMA	Approval code Bussmann GMA	Code d'homologation Bussmann GMA
Norme riferimento UL/CSA 248-14	Standards UL/CSA 248-14	Normes UL/CSA 248-14

pag. 26




Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai	
	1,35xIn	2xIn
63 mA - 15 A	< 60 min	< 2 min

Corrente nom. Rated current Courant nominal	Omologazioni Approvals Homologations	Codice Code Code	Caduta tensione mV Voltage drop Chute de tension mV	I ² t I ² t I ² t
63 mA		UF521063	4700	0,00024
100 mA		UF521110	4300	0,0001
125 mA		UF521112	2600	0,0024
200 mA		UF521120	3400	0,001
250 mA		UF521125	2200	0,018
300 mA		UF521130	470	0,019
315 mA		UF521131	450	0,019 NEW
500 mA		UF521150	230	0,15
600 mA		UF521160	200	0,32 NEW
750 mA		UF521175	200	0,47
800 mA		UF521180	180	0,70
1 A		UF521210	300	0,48
1,25 A		UF521212	290	0,84 NEW
1,5 A		UF521215	270	1,6
1,6 A		UF521216	260	2,0
2 A		UF521220	250	3,1
2,5 A		UF521225	240	4,9
3 A		UF521230	215	8,8
3,15 A		UF521231	210	9,7 NEW
3,5 A		UF521235	210	13,0 NEW
• 4 A		UF521240	205	19,0
• 5 A		UF521250	200	29,0
• 6 A		UF521260	180	45,0
• 7 A		UF521270	110	150,0 NEW
• 8 A		UF521280	110	280,0
• 10 A		UF521310	110	280,0
• 15 A		UF521315	100	950,0

1000 pz
1000 pcs
1000 pces

30 giorni
30 days
30 jours

• tensione 125 V
voltage 125 V
tension 125 V



FUSIBILI 5x20 UT

5x20 UT fuses | Fusibles 5x20 UT

Dimensioni	Dimensions	Dimensions
5x20 mm	5x20 mm	5x20 mm
Caratteristica T= ritardati	Characteristic T= time delay	Caractéristique T= temporisés
Tensione 250 V	Voltage 250 V	Tension 250 V
Capacità di rottura L 35 A - 125 mA ÷ 1 A L 100 A - 1,5 A ÷ 4 A	Breaking capacity L 35 A - 125 mA ÷ 1 A L 100 A - 1,5 A ÷ 4 A	Pouvoir de coupure L 35 A - 125 mA ÷ 1 A L 100 A - 1,5 A ÷ 4 A
Corpo Vetro	Body Glass	Corps Verre
Cod. omologazione Bussmann GMD (125 mA - 4 A) Bussmann GMC (5 A - 10 A)	Approval code Bussmann GMD (125 mA - 4 A) Bussmann GMC (5 A - 10 A)	Code d'homologation Bussmann GMD (125 mA - 4 A) Bussmann GMC (5 A - 10 A)
Norme riferimento UL/CSA 248-14	Standards UL/CSA 248-14	Normes UL/CSA 248-14

pag. 26



Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai	
	1,35xIn	2xIn
125 mA - 4 A 5A - 10 A	< 60 min	5 s - 2 min 2 min

Corrente nom. Rated current Courant nominal	Omologazioni Approvals Homologations	Codice Code Code	Caduta tensione mV Voltage drop mV Chute de tension mV	I ² t I ² t I ² t
125 mA		UT521112	1600	0,043
200 mA		UT521120	1100	0,20
250 mA		UT521125	950	0,40
500 mA		UT521150	550	1,4
600 mA		UT521160	450	3,1
750 mA		UT521175	410	4,7
800 mA		UT521180	380	6,6
1 A		UT521210	310	12
1,5 A		UT521215	240	25
1,6 A		UT521216	220	27
2 A		UT521220	200	42
2,5 A		UT521225	195	94
3 A		UT521230	190	145
4 A		UT521240	190	300
• 5 A		UM521250	120	58
• 6 A		UM521260	120	88
• 7 A		UM521270	120	150
• 8 A		UM521280	110	200
• 10 A		UM521310	110	300

1000 pz
1000 pcs
1000 pces



30 giorni
30 days
30 jours

• tensione 125 V - semiritardati
voltage 125 V - medium time-delay
tension 125 V - semi-temporisés



CARATTERISTICHE DI FUSIONE

Time current characteristics | *Caractéristiques de fusion*

FUSIBILI 5x20 SF 5x20 SF fuses | *Fusibles 5x20 SF*

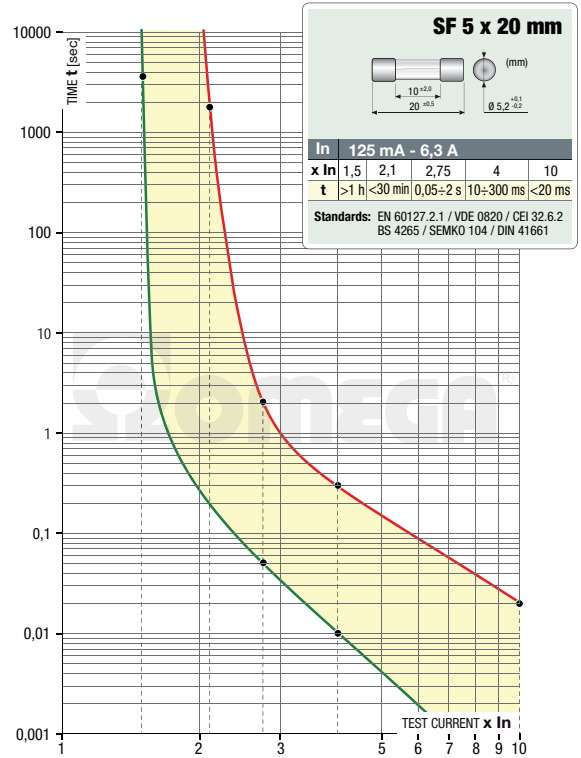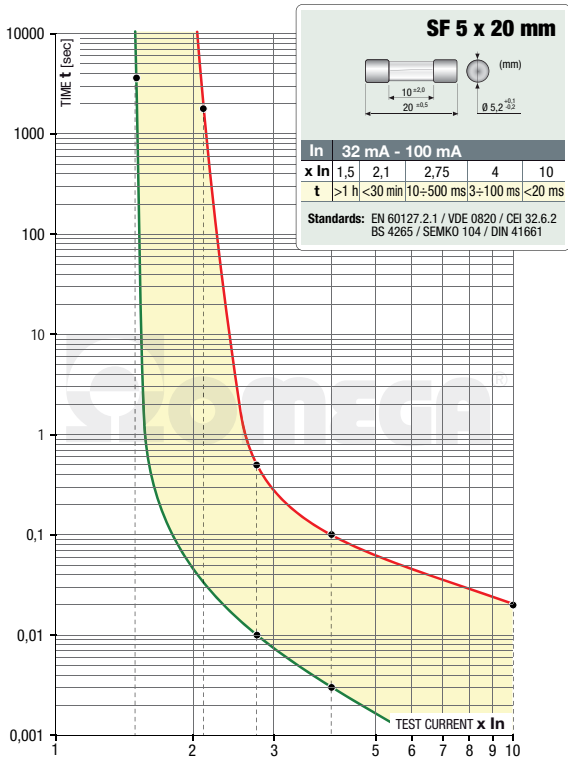


FUSIBILI 5x20 ST 5x20 ST fuses | *Fusibles 5x20 ST*

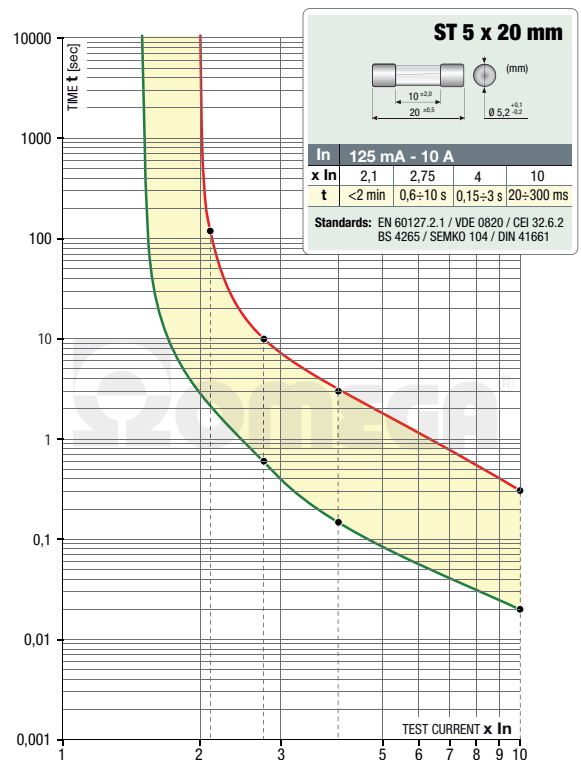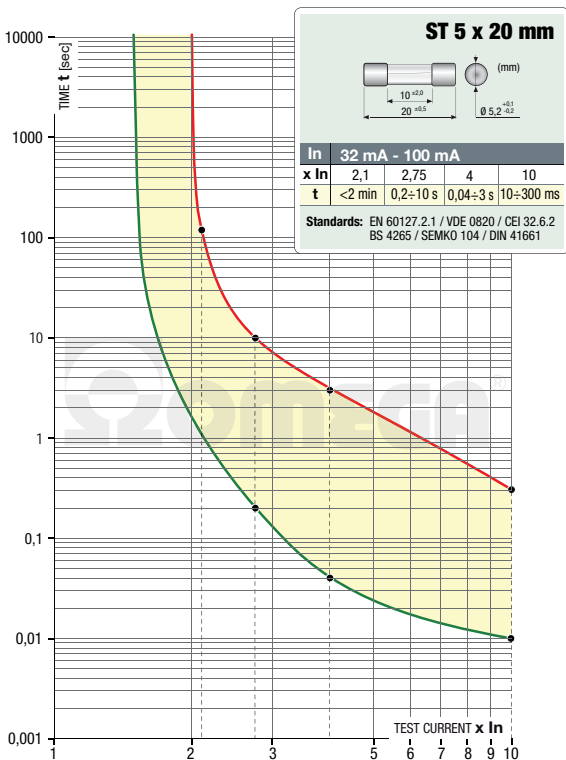


CARATTERISTICHE DI FUSIONE

Time current characteristics | *Caractéristiques de fusion*


FUSIBILI 5x20 CF
5x20 CF fuses | *Fusibles 5x20 CF*

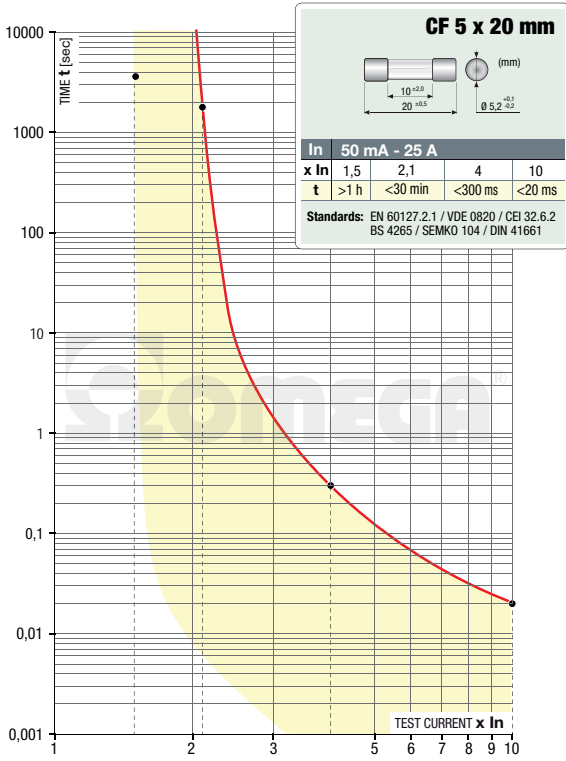


FUSIBILI 5x20 CT
5x20 CT fuses | *Fusibles 5x20 CT*

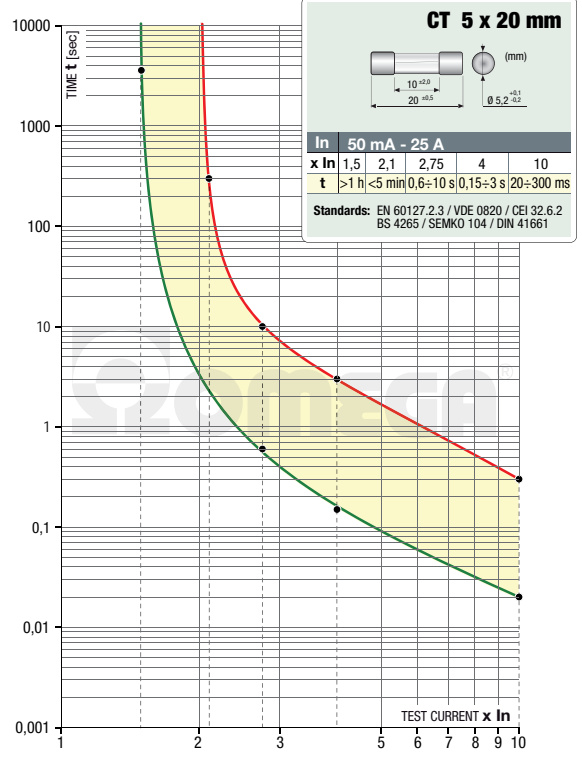

FUSIBILI 5x20 UF
5x20 UF fuses | *Fusibles 5x20 UF*

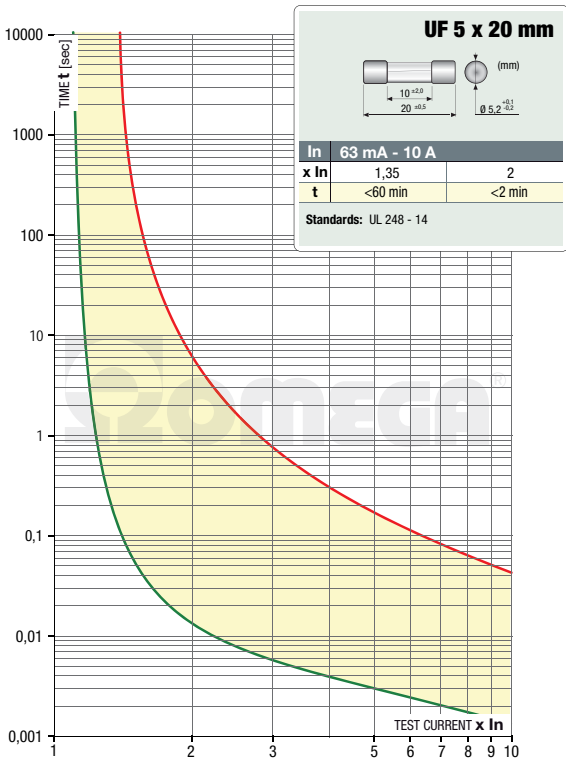



FUSIBILI 5x20 UT
5x20 UT fuses | *Fusibles 5x20 UT*

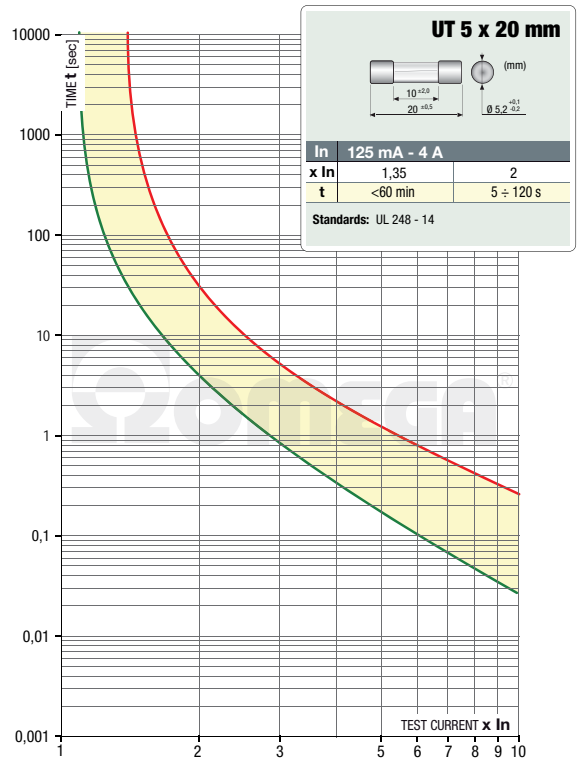

CARATTERISTICHE DI FUSIONE

Time current characteristics | *Caractéristiques de fusion*

FUSIBILI 6,3x32 CF 6,3x32 CF fuses | *Fusibles 6,3x32 CF*

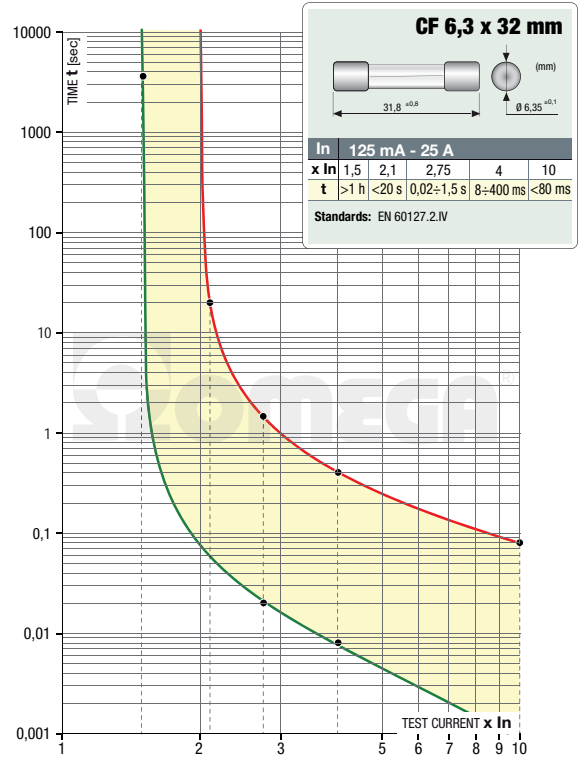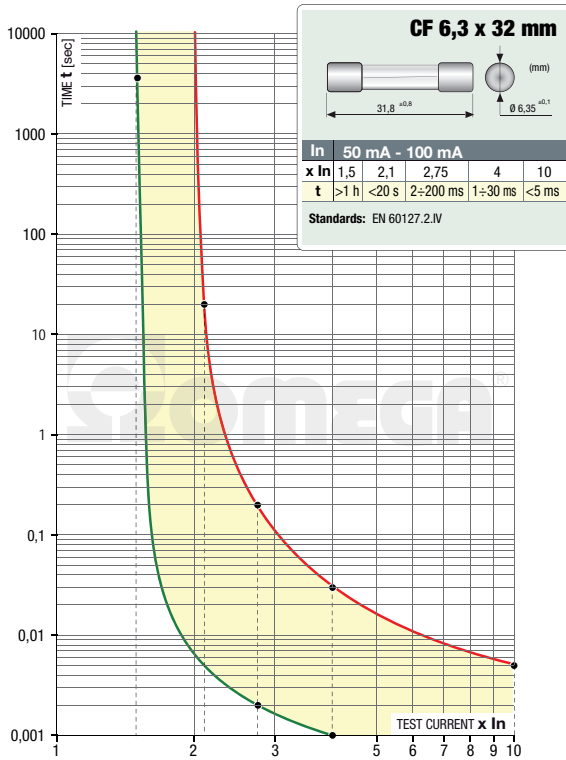

FUSIBILI 6,3x32 CT 6,3x32 CT fuses | *Fusibles 6,3x32 CT*

