


IEC LOCK

C13 LOACKABLE OUTLET

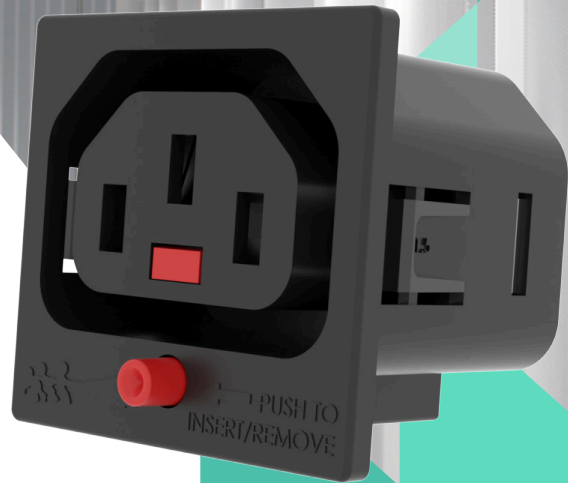

Technical Information

General Information

- Snap-in mounting from front
- Solder terminal or quick connect from single terminal
- Protection class 1
- Integral plug retention feature

Technical Data

Rating: 10A/250VAC

Insulation Resistance:
10M Ω (500VDC, 1 Min.)

Dielectric Strength:
2KV (50Hz 1 Min) to accessible surfaces

Materials Socket:

Black Thermoplastic UL94V-0

Approvals

10 A/250VAC: ENEC 05, KEMA KEUR

15 A/250VAC: UL

Standards

IEC/EN 60320-2-2/FUL498

CSA C22.2 No 182.3-M1987

Patent

UK Number: 2463468B

EU Number: EP2321879A


HK Number: HK1141901

Chinese Patent Application No:
CN 102150330 A

Other worldwide patents pending

Product

- Black & White IEC320 Snap in 1mm or 1.5mm Panel Thickness
- Quick Connector/Solder 6.3 x 0.8mm

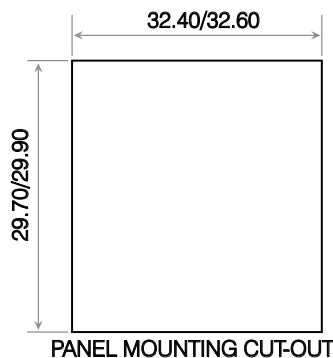

ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
08918 Badalona SPAIN

Tel. +34 902 450 160
info@ermec.com
www.ermec.com

ERMEC, S.L. - MADRID
C/ Puerto Rico, 4
28222 Majadahonda (Madrid) SPAIN

bilbao@ermec.com
portugal@ermec.com