




Features

- Relay module with 4-pole relay with forcibly guided contacts according to IEC 61810-3
- Application type A
- Protective separation (see insulation data)
- Integration in safety applications according to IEC/EN 62061, ISO/EN 13849 possible*
- Mounting on 35 mm mounting rail (IEC 60715)
- Switching current: 8 A MAX
- Switching voltage: 250 V AC/DC
- Power consumption: 0,83 ... 1,4 W
- Overvoltage protection in the control unit
- With spring terminals (SMD319)
- With screw terminals (SMD318)
- Contact assembly
SMD318/319: 3 NO + 1 NC


* User is responsible for correct integration!

Dimensions

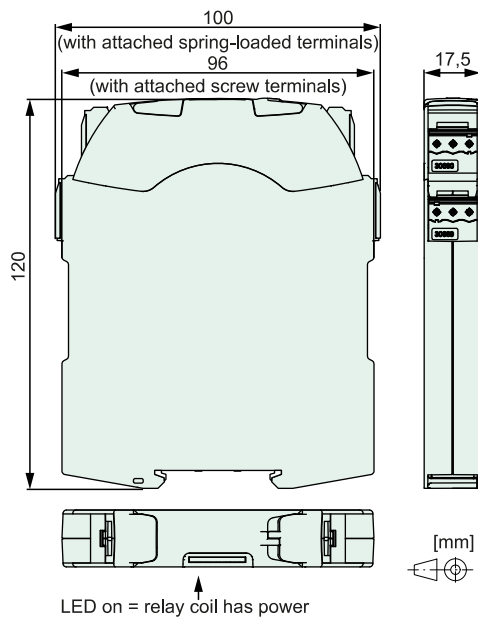

Module data excitation side at 20 °C

Nominal voltage (VDC)	Min. Pick-up voltage (VDC)	Min. Drop-out voltage (VDC)	Nominal current (mA)
5	3,5	0,5	167
12	8,4	1,2	78
18	12,6	1,8	66
24	16,8	2,4	40
110	77,0	11,0	13

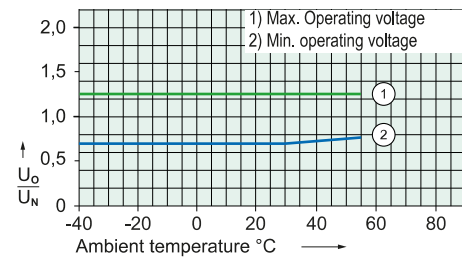

Test conditions:


- Graph 1: Contact current 5 A MAX
- Graph 2: without previous operation
- Duty cycle 100%

Contact data

Contact material	AgCuNi + 0,2, ..., 0,4 µm Au
Type of contact	Single contact with notched crown
Rated switching power	2000 VA
250 V / 8 A / AC-1 (max.)	
Electr. life time (0,1 Hz, rel. duty cycle 10%)	100000
Inrush current	30 A for 20 ms
Switching voltage range	5, ..., 250 V DC / AC
Switching current range*	3 mA, ..., 8 A
Switching power range*	40 mW, ..., 2000 W (VA)
Contact resistance as new (max.)	100 mΩ
Short circuit resistance of NO contacts**	1000 A
with pre-fuse	SCPD 10 A gG / gL (fuse)
Short circuit resistance of NC contacts**	1000 A
with pre-fuse	SCPD 6 A gG / gL (fuse)

* Reference values ** Prospective short-circuit current

Electrical life (NO contacts)

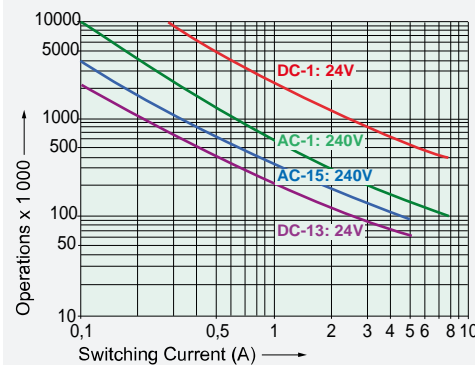


Switching capacity (IEC 61810-1)

AC-1:	240 V / 8 A MAX
AC-15:	240 V / 5 A MAX
DC-1:	24 V / 8 A MAX
DC-13:	24 V / 5 A / 0,1 Hz MAX
	L/R = 40 ms


Switching capacity (UL 508)

B300, R300	
Continuous current per contact at load of:	
1 or 2 contacts	8 A MAX
3 contacts	6 A MAX

Contact load limit curve (DC)

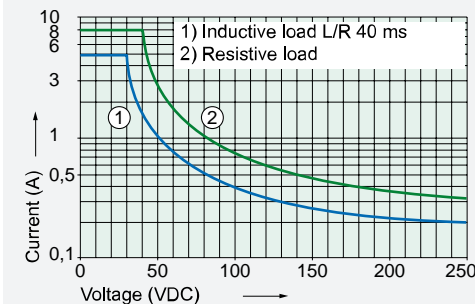

Circuit diagram (top view)

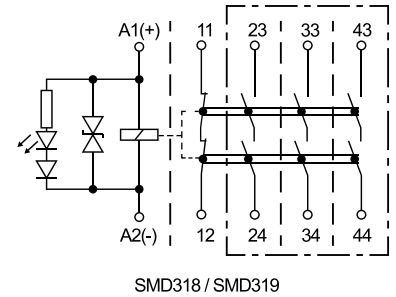

SMD318 / SMD319

Insulation data

Rated insulation voltage (IEC 60664-1)	250 VAC
Basic insulation	
- Air and creepage distance (min.)	2,5 mm
- Test voltage	2500 V _{rms} / 1 min
Double or reinforced insulation	
- Air and creepage distance (min.)	5,5 mm
- Test voltage	4000 V _{rms} / 1 min
Open contact: Test voltage*	1500 V _{rms} / 1 min
Pollution degree	2
Overvoltage category	III

* Initial value

Mechanical data

Mechanical lifetime (min.)	10 x 10 ⁶ operations
Switching frequency (max.)	8 Hz
Response time (NO closed) (typ.)	20 ms
Drop-out time (NC closed) (typ.)*	5 ms
Bounce time (typ.)	NO: 2 ms / NC: 20 ms
Shock resistance (16 ms) (min.)	NO: 15g / NC: 5g
Vibr. resistance (10-200 Hz) (min.)	NO: 10g / NC: 1,5g
Weight	approx. 130 g
Mounting position	any

* without coil wiring

Technical data

Connection data Screw terminal:	
- Cross sections for wire:	0,2 - 2,5 mm ² / AWG 24 - 14
- Cross sections for braid:	0,2 - 2,5 mm ² / AWG 24 - 12
- Tightening torque:	0,6 Nm
Connection data spring terminal:	
- Cross sections for wire:	0,2 - 2,0 mm ² / AWG 24 - 14
- Cross sections for braid:	0,2 - 2,5 mm ² / AWG 24 - 12

Other data

Ambient temperature	-40 °C, ..., +55 °C
Thermal resistance	60 K / W
Protection class	IP20
Approvals	cULus
UL File	E188953

Mounting instructions

Mounting on 35 mm mounting rail (IEC 60715)

Options, Accessories

Other coil designs possible

Product key

SMD 3 1 8 24VDC XX

SMD	Type designation	
3	Number of contacts NO	
1	Number of contacts NC	
8	Connection technology	8=screw terminal, 9=spring terminal
24VDC	Nominal coil voltage	
XX	Options	



ERMEC BCN
C/ Francesc Teixidó, 22
P.E. Granland, Badalona Sur
08918 Badalona (Barcelona)
SPAIN
comercial@ermec.com
Tel. (+34) 934 501 600
Fax (+34) 934 330 885
www.ermec.com

ERMEC MADRID
Tel. (+34) 918 285 051
madrid@ermec.com

ERMEC BILBAO
Tel. (+34) 946 455 054
bilbao@ermec.com

ERMEC PORTUGAL
Tel. (+351) 707 509 539
portugal@ermec.com