



MS-328E

E-Bike Sensor Flatpack



Product image serves as example only.

Electrical Characteristics

@ 25°C

Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	140
Switching current max.	A	1.0
Carry current max.	A	1.2
Breakdown voltage min.	VDC	240
Total resistance max. (initial)	Ω	1
Insulation resistance min.	Ω	10 ¹⁰

Magnetical Characteristics (of unmodified Reed Switch)

@ 25°C

Pull in range available	AT	10 – 15
Drop out min.	AT	4
Test coil	TC	014
Test equipment tolerance	± AT	2

Operating Characteristics (of unmodified Reed Switch)


@ 25°C

Switching frequency max.	Hz	500
Resonant frequency typ.	Hz	4000
Operate time max. (incl. bounce)	ms	1.0
Release time max.	ms	0.4

Environmental Characteristics

Operating temperature	°C	-40 to +85
Storage temperature	°C	-40 to +70
Vibration (50-2000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	100

Dimensions in mm

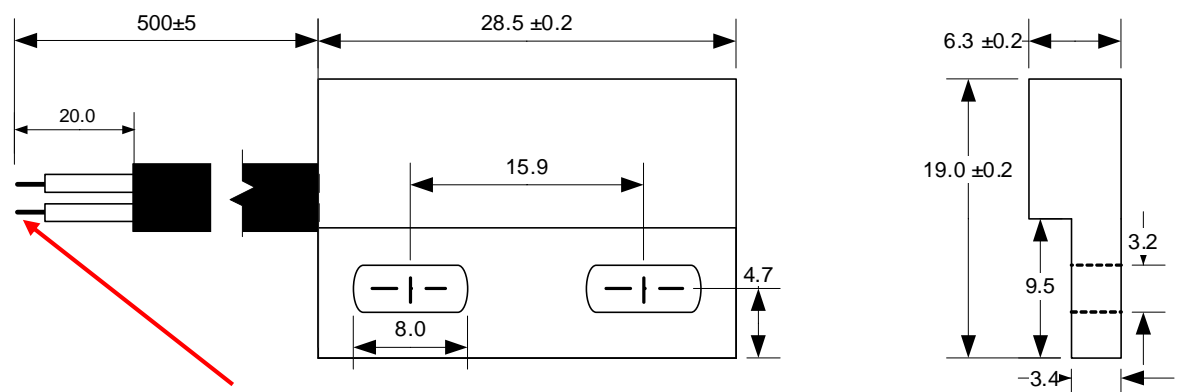

Remarks

Customizable cable length and connector possible

Matching Spoke Magnet
PIC-SM115153 available as well



MS-328E

E-Bike Sensor Flatpack



Material Information

Housing material	PA66+30%GF, black
Potting material	PU, black
Cable information	Coroplast black, TT3 PUR FLR9Y11Y, 2x0.35mm ² , dia 4.0-0.4mm, 2 cores 20 mm dismantled, max. 10mm core ends stripped



ERMEC, S.L.
C/ Francesc Teixidó, 22
P. E. Granland, Badalona Sur
08918 Badalona
Barcelona (SPAIN)

Tel. (+34) 902 450 160
Fax (+34) 902 433 088
ermec@ermec.com
www.ermec.com

Remarks

When mounted onto ferromagnetic parts switching distance of MS-328E may reduce.
Electromagnetic influences and magnetic fields may change the switching behaviour of the sensor.