



TIPPMATIC®



Dimensions



Circuit diagram



ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
Parque Empresarial Granland
E-08918 Badalona (Sur)

Tel.: (+34) 902 450 160
Fax: (+34) 902 433 088
info@ermec.com
www.ermec.com

ERMEC, S.L. MADRID
C/ Sagasta, 8 1ª planta
E-28004 Madrid
(Spain)

PORTUGAL
portugal@ermec.com

TIPPMATIC® Rocker switch with integrated auto-shut-off function

- Characteristics
- integral timer function
 - different times available
 - single pole
 - on/off
 - illuminated/non-illum.
 - snap-in mounting
 - temp. 100/55°

Rating 250 VAC, 12 (4) A
125 VAC, 15 A

Dimensions (mm) 37.2 × 17 × ~38

Actuator ■ standard rocker 25.4 × 10.7 mm

Approvals ENEC, cUL



Auto-Shut-Off

Preferred Range Switch

Ordering Reference	Illumination	Terminals 4,8	Time delay		Approvals
			50 Hz	60 Hz	
3600-411.27 1552	With	tab 4,8 mm	15 min.	12.5 min.	250 VAC 12 (4) A
3600-414.27 1552	With	tab 4,8 mm	120 min.	100 min.	250 VAC 12 (4) A
3600-412.27 1552	With	tab 4,8 mm	30 min.	25 min.	250 VAC 12 (4) A

Preferred Range Switch cover

Ordering Reference	Size (mm)	Color
100-012.0152	10,5 × 25	white
100-012.0167	10,5 × 25	black

Preferred Range Adapter

Ordering Reference	Size (mm)	Color	Size (mm)	Wall thickness
100-071.0150		white	43,7 × 17,8	2,5 ± 0,5 mm
100-071.0167		black	43,7 × 17,8	2,5 ± 0,5 mm

ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
Parque Empresarial Granland
E-08918 Badalona (Sur)

Tel.: (+34) 902 450 160
Fax: (+34) 902 433 088
info@ermec.com
www.ermec.com


ERMEC, S.L. MADRID
C/ Sagasta, 8 1ª planta
E-28004 Madrid
(Spain)

PORTUGAL
portugal@ermec.com


Specifications

Base	PA
Rocker	PC
Mechanism	Single pole
Functions	ON/OFF
Contacts	Ag/Ni
Protection	IP00
Mounting	Snap-in mounting or customised
Tracking Resistance	PTI 250
Glow-wire	850°C
Contact gap	3 mm

Circuit diagram



Dimensions

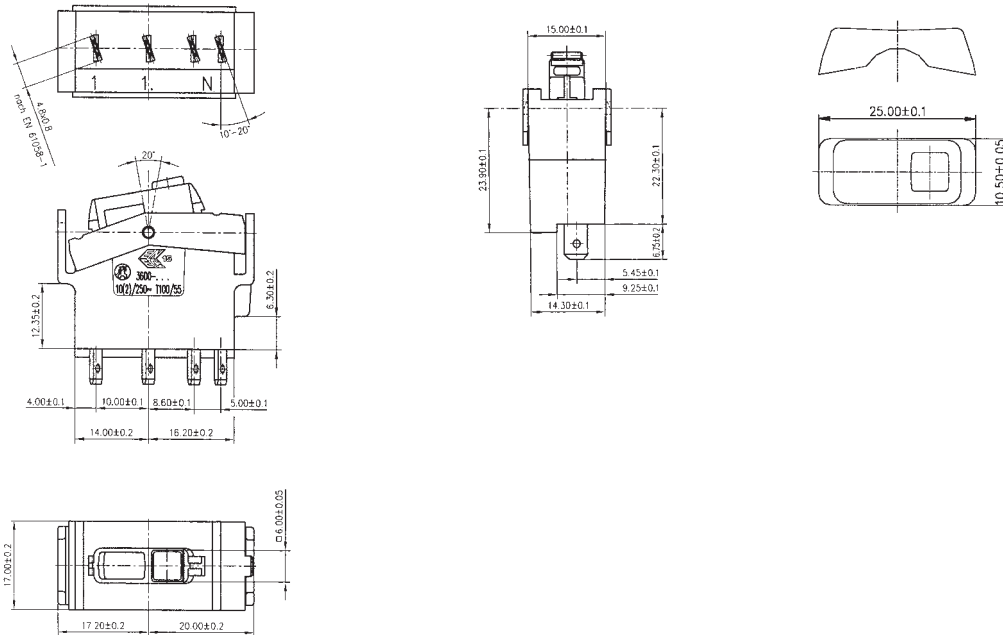

ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
Parque Empresarial Granland
E-08918 Badalona (Sr)

Tel.: (+34) 902 450 160
Fax: (+34) 902 433 088
info@ermec.com
www.ermec.com

ERMEC, S.L. MADRID
C/ Sagasta, 8 1ª planta
E-28004 Madrid
(Spain)

PORTUGAL
portugal@ermec.com

Production range switches

Ordering Reference	Illumination	Terminals 4,8	Time delay		Approvals ENEC	cUL
			50 Hz	60 Hz		
3600-410.27 1552	With	tab 4,8 mm	5 min.	4,1 min.	250 VAC 12 (4) A	
3600-413.27 1552	With	tab 4,8 mm	60 min.	50 min.	250 VAC 12 (4) A	
3600-419.27 1542	Without	tab 4,8 mm	30 min.	25 min.	250 VAC 12 (4) A	
3600-510.27 1542	With	tab 4,8 mm	5 min.	4,1 min.		125 VAC 15 A
3600-512.27 1542	With	tab 4,8 mm	30 min.	25 min.		125 VAC 15 A
3600-513.27 1542	With	tab 4,8 mm	60 min.	50 min.		125 VAC 15 A

ERMEC, S.L. BARCELONA
C/ Francesc Teixidó, 22
Parque Empresarial Granland
E-08918 Badalona (Sur)

Tel.: (+34) 902 450 160
Fax: (+34) 902 433 088
info@ermec.com
www.ermec.com

ERMEC, S.L. MADRID
C/ Sagasta, 8 1ª planta
E-28004 Madrid
(Spain)

PORTUGAL
portugal@ermec.com